Government of Nepal
Ministry of Physical Infrastructure and Transport
Department of Roads

Development Corporation Implementation Division
(DCID) Babarmahal Kathmandu, Nepal

Strategic Road Connectivity and Trade Improvement Project (SRCTIP)

FINAL REPORT

Addendum Resettlement Action Plan (RAP)

Kamala-Dhalkebar-Bagmati (KDB) Road Section

October 2026

Official Use Only

ACRONYMS AND ABBREVIATIONS

AH	Asian Highway
AIDS	Acquired Immune Deficiency Syndrome
CBS	Central Bureau of Statistics
CDC	Compensation Determination Committee
CDO	Chief District Officer
CFUGs	Community Forest User Groups
COI	Corridor of Impact
CSC	Construction Supervision Consultant
DAO	District Administration Office
DCC	District Coordination Committee
DCID	Development Cooperation Implementation Divisions
DIA	Direct Impact Area
DLRO	District Land Revenue Office
DoR	Department of Road
EIA	Environmental Impact Assessment
ESF	Environmental and Social Framework
ESIA	Environmental and Social Impact Assessment
ESMF	Environmental and Social Management Framework
ESS	Environmental and Social Standard
FGDs	Focus Group Discussions (Added)
FPIC	Free Prior and Informed Consent
FW	Formation Width
GESU	Geo-Environment and Social Unit
GoN	Government of Nepal
GRM	Grievance Redress Mechanism
HHs	Households
HIV	Human Immune Deficiency Virus
HW	Highway
IIA	Indirect Impact Area
IPs	Indigenous Peoples
KDB	Kamala- Dhalkebar-Bagmati

KDP	Kamala Dhalkebar Pathlaiya
LRO	Land Revenue Office
MOPIT	Ministry of Physical Infrastructure and Transport
NEFIN	Nepal Federation of Indigenous Nationalities
NGO	Non-Governmental Organization
NEA	Nepal Electricity Authority
NHDR	Nepal Human Development Report
NLSS	Nepal Living Standard Survey
NNM	Nagdhunga-Naubise-Mugling
NRs	Nepalese Rupees
OHS	Occupational Health Safety
PAHs	Project Affected Households
PAPs	Project Affected Persons
PCU	Project Coordination Unit
PIC	Project In-Charge
PIP	Priority Investment Plan
PLI	Poverty Line Income
PMU	Project Management Unit
R&R	Resettlement and Rehabilitation
RAP	Resettlement Action Plan
RCC	Reinforced Cement Concrete
RF	Resettlement Framework
RoW	Right of Way
SRCTIP	Strategic Road Connectivity and Trade Improvement Project
SRN	Strategic Road Network
ToR	Term of Reference
WB	World Bank
ZoI	Zone of Influence

GLOSSARY OF TERMS

S.N.	Description
Compensation	Compensation is the payment to the PAPs in cash or kind for private property acquired by the project, based on replacement value as defined by the Compensation Determination Commit- tee (CDC). However, the depreciation and salvage value will not be deducted while computing compensation with respect to the replacement value.
Compensation Determination Committee	The district-level committee will be established in each road district under Section 13(2) of the Land Acquisition Act, 203 4B.S. (1977), to determine replacement value and compensation rates against the property acquired under the Act.
Cultural heritage	Resources with which people identify as a reflection and expression of their constantly evolving values, beliefs, knowledge and traditions.
Cut-off Date for Eligibility to Entitlement	RAP verification survey along with enumeration date was January-October, 2025 which was the cutoff date principally. However, the actual cutoff date for this RAP addendum was the CDC meeting date 14th October 2025 and 11 & 12 November, 2025. This was disclosed through issuance of CDC notice on same date and dispatched concerned ward and provided directly to the project affected family (PAF)
Entitled Person	Any person who is entitled to get compensation due to loss of Privately owned Assets and other rehabilitation assistance.
Forced Eviction	The permanent or temporary removal against the will of individuals, families, and/or communities from the homes and/or land which they occupy without the provision of, and access to, appropriate forms of legal and other protection, including all applicable procedures and principles.
Involuntary resettlement	Project related land acquisition or restrictions on land use may cause physical displacement (relocation, loss of residential land or loss of shelter), economic displacement (loss of land, assets or access to assets, including those that lead to loss of income sources or other means of livelihood), or both. The term involuntary resettlement refers to these impacts. Resettlement is considered involuntary when affected persons or communities do not have the right to refusal and acquisition nor restrictions on land use that result in displacement.
Land acquisition	All methods of obtaining land for project purposes, which may include outright purchase, expropriation of property and acquisition of access rights, such as easements or rights of way. Land acquisition may also include: (a) acquisition of unoccupied or unutilized land whether or not the land holder relies on such land for income or livelihood purposes; (b) repossession of public land that is used or occupied by individuals or house- holds; (c) project impacts that result in land being submerged or otherwise rendered unusable or accessible. Land includes anything growing on or permanently affixed to land such as crops, buildings and other improvement, and appurtenant waterbodies.
Livelihood	Livelihood refers to the full range of means that individuals, families, and communities utilize to make a living, such as wage-based income, agriculture, fishing, and other natural re- source-based livelihoods, petty trade, and bartering.

Project Affected Person	Any person directly affected by the project through the acquisition of assets belonging to him/her of his/her household or community. This includes any person whose rights, standard of living, subsistence and income-generating capacity are adversely affected through the acquisition of assets, whether Full / Partial, or permanent/temporary.
Project Affected Household	The group of people residing in one house and operating as a single economic unit, who are affected by the project. The project affected families are included widow or unmarried daughters (biological or adopted), matured son, adopted son over the age of 18 years who is looking personal business as livelihood management and or acting as household head in absence of par- will be entitled to rehabilitation measures.
Restrictions on land use	Limitations or prohibitions on the use of agricultural, residential, commercial or other land that are directly introduced and put into effect as part of the project. These may include restrictions on access to legally designated parks and protected areas, restrictions on access to other common property re- sources, restrictions on Land use within utility easements or safety zones.
Rehabilitation	The measures taken to mitigate identified social impacts, including compensation, displacement assistance, rental stipend, business disturbance allowance and support allowance
Replacement Cost	A method of valuation yielding compensation sufficient to replace assets. This constitutes the current market value of the asset plus transactional costs.
Titleholders	The person who owns the project-affected land and/or building and has ownership certificate and the person who is authorized by law to receive the compensation Granted for the acquisition of land.
Non-Titleholders	Individuals residing on rented or encroached land.
Tenant	A person who does not have legal ownership of a property and is occupying/using the property of a titleholder according to the stipulations of the Land Act, 2021 (1964).
Vulnerable Groups	Vulnerable groups refer to individuals who, due to existing challenges, may be disproportionately affected by the project and could potentially face increased hardship. These individuals often have special needs and their circumstances may worsen as a result of the project.

1. Project Background

The Government of Nepal (GoN), with financing from the World Bank (WB), is implementing the improvements and upgrading of strategic roads that are of vital importance to the country's economic development and regional connectivity through Strategic Road Connectivity and Trade Improvement Project (SRCTIP). SRCTIP comprises four components; **component-1 Trade Facilitation (IBRD/IDA credit US$ 29.4m)[1] is to under Ministry of Industry, Commerce and Supplies (MOICS) and component-2 Regional Connectivity Improvement Component (IDA credit US$ 350.1m), component-3 Institutional Strengthening Component (IDA credit US$ 70.1m), component-4 Contingency and Emergency Response (IDA credit US$ 0.00 m).** Components 2, 3, and 4 are implemented under the Ministry of Infrastructure Development (MoID).

Improvement of existing Naghdhunga-Naubise-Mugling (NNM-94.7) road and bridges and upgrading of Kamala-Dhalkebar-Pathlaiya (KDP-130) road and bridges is under component-2. The KDP road section spans 130 km, beginning from the Kamala River and ends at the Pathlaiya junction of Bara district, and traverses Dhanusha, Mahottari, Sarlahi, Rautahat and Bara districts. This RAP Addendum however relates specifically to the 77km Kamala-Dhalkebar-Bagmati (KDB) section of the KDP corridor. The KDP corridor forms an important part of Nepal's strategic road network, connecting major access route to Birgunj in the south-west, Kathmandu in the north and various other parts of western Nepal. it also facilitates connectivity linking major tourist, economic and industrial cities such as Kathmandu, Pokhara, Chitwan, Lumbini and Biratnagar, and forms an integral part of the Asian Highway 2 (AH2).

The 77km KDB road improvement works encompasses upgrading and widening the existing roadway to a minimum of 4 lane road standard, along with upgrading of 61 bridges and conversion of 15 small bridges into box culvert, out of 76 existing bridges. The works also include improvement of 27 major junctions, 49 Bus Bays 5 Truck Lay Bays, and 5 Vehicle Underpasses (VUP), including 10 Pedestrian Underpasses (PUP) at Birendra Bazar, Lalbandi, Nawalpur, Hariwon and Naya Road, in response the rapid urbanization along the project corridor. Selected urban sections will be widened to 4-6 lanes.

This RAP Addendum updates the approved RAP (2024) based on subsequent verification surveys conducted in 2025. It provides updated information on verified number of affected persons and households, affected assets, the nature and extent of physical and economic displacement, applicable entitlements, compensation and resettlement assistance, livelihood restoration, implementation status, and budget. The policy principles, eligibility framework, institutional arrangements, grievance mechanism, monitoring and evaluation framework established under the original RAP remain applicable, except where specifically updated or clarified in this Addendum. Accordingly, the Addendum supplements, rather than replace the approved RAP and should therefore be read together with the original RAP. Information on compensation payment, dismantling or relocation activities, consultations, and other implementation progress is included solely to document the status of implementation.

The original RAP, approved in June 2024, identified 64 project affected households (PAHs), 66 affected private structures and 216 public/community structures. Subsequent field verification for this RAP addendum, however, has identified 219 (PAHs) with varying types and levels of impact.

2. Project Descriptions

The Kamala-Dhalkebar-Bagmati section (KDB 77KM.) of KDP road, also known as East-West (Mahendra) Highway, under the Strategic Road Connectivity and Trade Improvement Project (SRCTIP), is being upgraded from the existing two-lane configuration to minimum of four lanes standard with service road in densely populated and built-up areas. The road improvement is expected to significantly enhance road capacity and efficiency, improve safety, and facilitate regional trade and connectivity. The KDB road section traverses Dhanusha, Mahottari, and Sarlahi district with divided into three construction lots. The project location, proposed road alignment and corresponding construction Lots are shown in **Figure 1-1.**

[1] *Note: This Component will be implemented through Ministry of Industry, Commerce and Supplies (MOICS).*

Figure 2-1: Road Location Map of Project

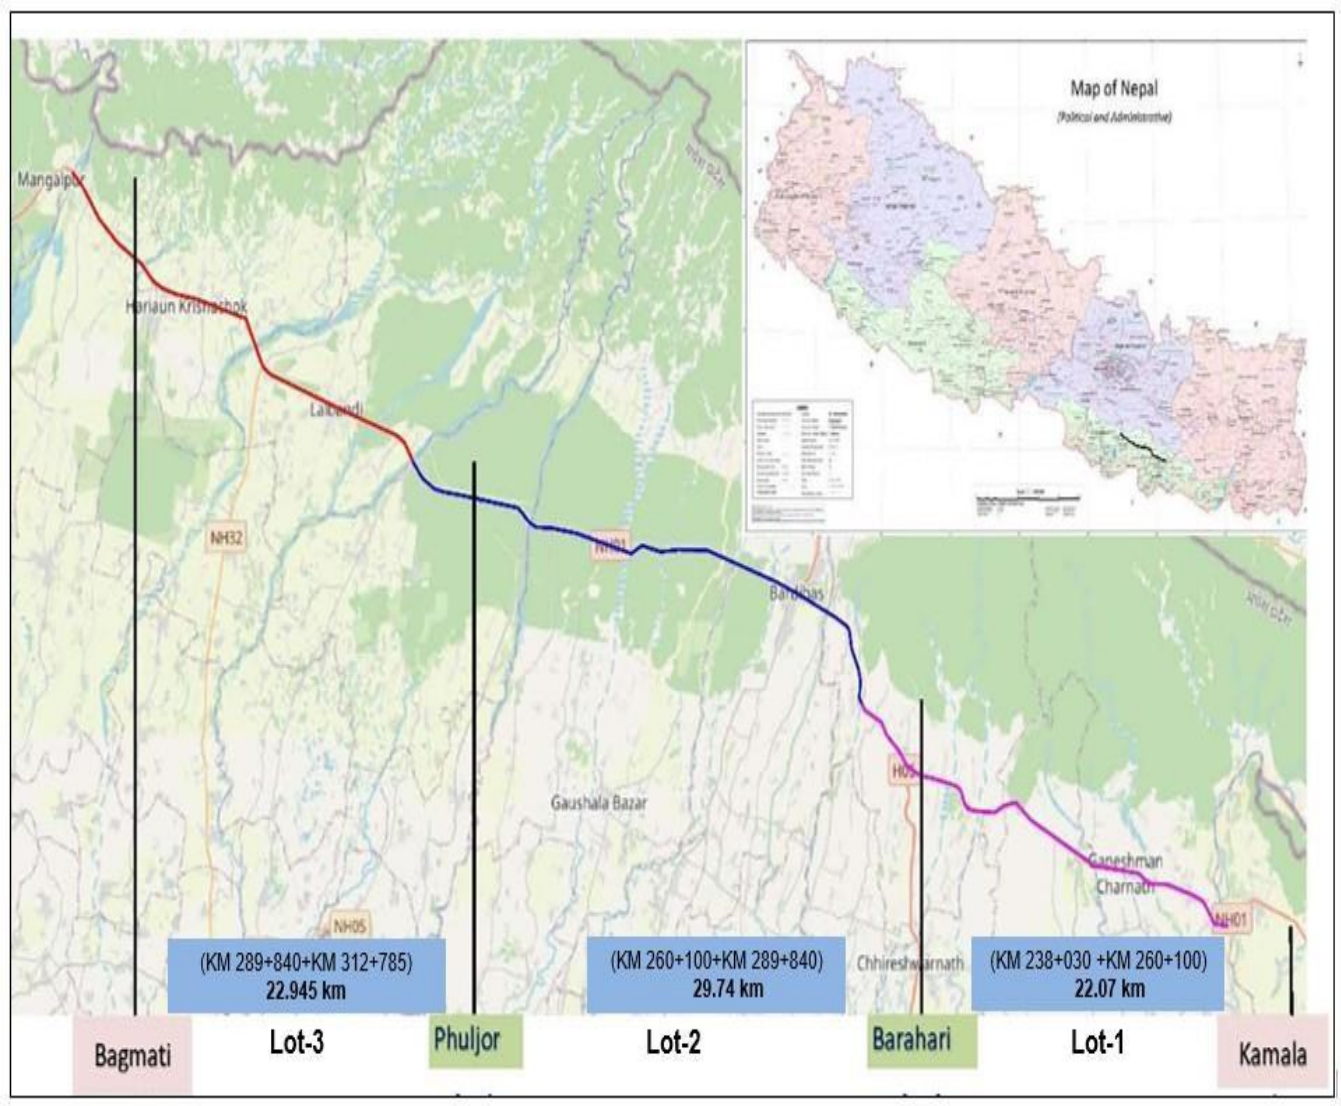

The salient features and technical specification of KDB project is mentioned below in Table 1-1.

Table-1.1 Salient Features of the KDB Road Project

Name of the Sub-Project	**Upgrading of Kamala-Dhalkebar-Bagmati section of Kamala-Dhalkebar-Pathlaiya Road**
Province	Madhesh
Start Point	Kamala Bridge (Ch: 236+698) 26°52'40.73"N latitude and 86° 8'24.20"E longitude

End Point	Bagmati (Ch: 312+785) 27°11'57.66"N latitude and 84°58'50.76"E longitude
Name of Districts and Municipalities	Dhanusa: Dhanusadham, Ganeshman Charnath, Mithila Mahottari: Bardibas, Gausala Sarlahi: a) Ishworpur municipality b) Lalbandi municipality c) Hariwon municipality d) Bagmati municipality
Major Settlements	Portaha,Godar Bazar, Birendra Bazar, Bhimwan, Dharapani, Puspalpur, Dhakebar, Badahari, Lalgadh, Bardibas, Phuljor, Ranigunj, Lalbandi, Nawalpur, Hariwon, Bagmati,

Table 1-2: Technical Specifications of the Project

Technical Specification	Existing	Proposed
Classification	Class II	Class II as per NRS 2070 and Class I as per Asian Highway Standard (AH2)
Length of Road	77 km	77 km
Right of Way	50 m	50 m
Carriageway Width	7.0 m (Average)	18 m (7.0 m on either side with 4 m center median), further 6.5 m service road width on either side of roads in urban areas.
Formation Width	(10 –12) m	24 m
Shoulder Width	1.2 m	2.5 m
Side Drain (width)	Side Drains are available at Dense settlement area	U-shape drain provision is given in the pro- posed design.
Design Standard		
Standard		NRS-2070
Design Speed		100 kmph
Gradient (Maximum and Minimum)		5%
Minimum Radius of the Horizontal Curve		Maximum as per design and minimum should be at least 870 m as per NRS-2070.
Camber		2.50%
Super Elevation		7%
Crossings		
Bridges	Out of 76 nos. of Bridges (61 bridges will be upgraded and 15 existing small bridges will be converted into Box Culverts). One four-lane bridge of Dudhaura is under construction.	
Culverts	122 nos. (existing)	
VUP/PUP	5 VUP (including 10 PUPs) in 5 Locations (Birendra Bazar, Lalbandi, Nawalpur, Hariwon and Naya Road)	
Causeway (will not re-main)	21 nos. (All these Causeways are converted into Box Culverts)	
Elephant Crossings	8 as Animal passes	
Medium sized animal crossings	10 as Animal passes	
Junction Improvement		
Major Junction Improvement	27	

Bus Bays/Shelters	49
Truck- Lay Bays	(At 5 locations: 268+700, 324+300, 327+800, 347+800, 366+300 Chainages)
Service Roads	34,704 meters at 19 Locations
Tractor/Cart Crossings	18 Locations
Traffic Data (January 2022, Base Year Traffic)	
AADT, Vehicle/day	13249 at the Kamala-Dhalkebar section and 8306 at the Nijgadh-Pathlaiya section

3. Rational for Updated Resettlement Action Plan

The RAP addendum builds on the approved original RAP, and maintains its overall principles, objectives, and eligibility framework, implementation, monitoring and evaluation arrangement, while updating information based on subsequent verification undertaken for the relevant project section. The RAP addendum reflects changes that have occurred since the original plan was developed, including addressing outstanding cadastral, deed transfer and RoW Demarcation RoW, modifications in project design, verification and reconciliation of affected persons and assets; and maintaining updated census and socio-economic data, and evolving stakeholder concerns. It incorporates verified data on affected households and assets and updates on consultations and feedback gathered during the joint verification while maintaining the applicable eligibility and entitlement principles established under the approved RAP. This ensures continuity while enhancing the plan's accuracy, responsiveness, and compliance with both regulatory requirements and community expectations. The RAP verification conducted during project pre-construction phase provides a more accurate basis for confirming the nature and extent of resettlement impacts and the corresponding entitlements of affected persons. This RAP addendum therefore provides for timely compensation payments for eligible affected private assets at replacement cost and applicable resettlement and livelihood restoration assistance. The road upgrading work is confined within RoW, and no additional private land is required for the project**.**

The overall KDP Road Corridor is approximately 130 km in length and is being implemented in two sections: (i) the Kamala-Dhalkebar-Bagmati (KDB) East Section (77 km) and (ii) the Bagmati-Pathlaiya (BP) West Section (53 km). This RAP Addendum has been prepared specifically for the KDB East Section, where civil works procurement and RAP verification activities have progressed. Accordingly, the Addendum updates the approved RAP (2024) based on verification surveys conducted for this section and reflects the latest information on affected households, structures, public assets, compensation requirements, and implementation arrangements. Impacts associated with the BP West Section will be verified and addressed through separate resettlement planning updates as implementation progresses. Therefore, this RAP Addendum should be read in conjunction with the approved RAP (2024) and serves as a supplementary document rather than a replacement for the RAP covering the entire KDP Road Corridor.

The RAP Addendum aims to ensure continued alignment with national regulations and the World Bank Environmental and Social Framework, particularly ESS5, while addressing gaps and changes identified through verification and implementation. The revision also incorporates lessons learned and feedback from affected communities to enhance the accuracy and effectiveness resettlement measures. Where the Addendum identifies updated impacts, these updates will not reduce the applicable entitlements of eligible affected persons under the approved RAP. Compensation, resettlement assistance, livelihood restoration, stakeholder engagement, grievance management, and monitoring will continue to be implemented in accordance with the applicable Entitlement Matrix and the requirements of ESS5.

4. Objectives and Scope of the RAP Addendum

The RAP addendum has been prepared in line with the World Bank's Environmental and Social Standard (ESS)-5 on Land Acquisition, Restrictions on Land Use, and Involuntary Resettlement, and relevant regulations of the

Government of Nepal (GoN), including Land Acquisition Act 1977. The RAP addendum supplements the approved RAP (2024) and updates the assessment of resettlement impacts based on detailed verification undertaken for the KDB section. The RAP addendum aims to ensure that project related economic and physical displacement is avoided or minimized where feasible and that unavoidable impacts are appropriately mitigated through compensation, resettlement assistance, livelihood restoration, and other applicable measures. The specific objective of this RAP is as follows:

- To update and reconcile the resettlement impacts identified in the original RAP based on design modifications and field verification, including validation of affected persons, assets, and applicable entitlements through a participatory process.

- To avoid involuntary resettlement or, when unavoidable, minimize involuntary resettlement by exploring project design alternatives.
- To avoid forced eviction due to project road intervention.
- To mitigate unavoidable adverse social and economic impacts by: (a) providing timely compensation for loss of assets at replacement cost, and (b) assisting displaced persons to restore their livelihoods.
- To additional assistance to eligible poor and vulnerable affected persons and household who are likely to be affected disproportionately.
- To ensure that the resettlement activities are planned and implemented with appropriate disclosure of information, meaningful consultation, and the informed participation of those affected person
- provide for effective grievance management, monitoring, and evaluation to identify implementation gaps and ensure that RAP objectives and outstanding commitments are achieved.

The scope of the RAP addendum is confined to resettlement impacts within the 50m RoW along the 77 km KDB road section. A total of 3 private main structures and 56 temporary affected extended part of structures that were in the original RAP are not included in the scope of this RAP anymore due to design changes that avoid impact them. This RAP addendum now covers a total of (219) Project Affected Households (PAHs) and their affected structures, including temporary impacts on extended portion of structures located within RoW. The affected households are located in Ganeshman-Charnath, Dhanusadham, Mithila Bardibas, Gausala Ishworpur, Lalbandi Hariwan and Bagmati municipalities across Dhanusa, Mahottari and Sarlahi district. The scope also covers Stakeholder consultations including disclosure of project and resettlement information, consultation with affected persons and communities, and mechanisms for receiving and addressing concerns and grievances.

5. Methods and Cut-off date of RAP Addendum

The RAP verification process for the KDB road section commenced in January 2025 during the pre-construction phase at particular location and prior to the initiation of compensation process for affected persons. The team verified the project impacts against the original RAP and detailed design report and actual conditions observed along the project corridor. The verification also sought to identify any discrepancies between the original RAP inventory and impacts confirmed through subsequent field verification. A joint verification team comprised of contractor's safeguard team, CSC team (Social Development Expert and Highway engineer) along with representative of PIU and Department of Urban Development and Building Construction (DUDBC).

During the RAP verification, the social team and the technical team jointly measured the distance of structures from the centerline of RoW and verified all the project affected structures included in original RAP. The team also identified and enumerated new structures following same principle and methodology applied in the original RAP. The cost estimation was prepared following the same principle of original RAP but based on current district rate (2082-2083). Public structures were similarly verified and recorded. After the mobilization of contractors and the construction supervision consultant (CSC), a joint RAP verification team comprising the social safeguard team from CSC and contractor including dedicated engineers from PIC and social safeguard expert form DCID, conducted RAP re-verification of affected households from original RAP along with enumerated new structures of RoW dated from January to October 2025. Principally the RAP verification and enumeration survey was conducted from January-October, 2025. However, the actual cutoff date for this RAP addendum was the CDC meeting date 14th October 2025 and 11 & 12 November 2025. These cut-off dates were disclosed through issuance of CDC

notice on same date which were provided to the concerned wards and directly communicated to the Project-Affected Families (PAFs).

Eligibility of newly identified affected structures and assets was verified through field surveys, stakeholder consultations, review of available records, and validation by local authorities. Eligibility was determined in accordance with the original RAP and the approved cut-off date. Structures established after the cut-off date were excluded from compensation and assistance. All verified impacts and eligibility determination were documented and jointly reviewed by the Contractor, CSC, PIC, and DCID before being incorporated into the RAP Addendum inventory.

Although all identified impacts are located within the legally established 50-meter Right of Way (RoW), eligibility for compensation and assistance is based on verified project impacts and occupancy prior to the cut-off date, rather than land ownership status alone. Consistent with the original RAP and ESS5, all eligible affected persons, structures, assets, and livelihood sources identified through the verification survey will receive compensation, assistance, and rehabilitation support in accordance with the Entitlement Matrix.

The original RAP identified outstanding cadastral and deed transfer issues, at 6 locations (Dhalkebar, Badahari, Bagmati, Lalbandi, Chapur and Nijgadh) that required further reconciliation with established RoW. These issues arose from discrepancies between the established 50-meter Right of Way (RoW) and the cadastral records at these locations. To clarify the status, the cadastral map for all six locations were collected and reviewed, and a formal request for support was submitted to the relevant land survey authorities in July 2025. The review was followed by site verification by survey personnel to confirm the RoW boundaries and deed-transfer requirements. Based on this review and field verification, the cadastral and deed-transfer requirements at the six locations have now been clarified, including the requirements for land needed for project structures and approach roads. The outstanding deed transfer and demarcation issues were also discussed at recent GRC meeting dated 23 December 2025, bringing together the concerned stakeholders, project authorities and the project level-GRC. The required deed-transfer and associated administrative actions have subsequently been initiated.

5.1. Community Consultations

As an integral part of the (RAP addendum preparation process included a series of informal and formal consultations, conducted with key stakeholders at the local level. These consultations actively engaged ward-level authorities and Project Affected Households (PAHs) and other relevant stakeholder to provide information on the resettlement process, and inform preparation of the RAP Addendum and to ensure that the concerns and expectations of directly impacted communities were adequately captured and reflected in the planning process.

Participants included representatives from the District Administration Office and local government institutions, including the concerned municipalities of Ganeshman Charnath, Mitila, Bardibas, Ishworpur, Lalbandi and Hariwan and project affected households. All these stakeholders were consulted during January-October 2025. These interactions aimed to align the resettlement planning framework with applicable institutional mandates and administrative procedures.

The consultations generally indicated a broad cooperative and constructive response from the project-affected population. During the consultations, Project Affected Persons (PAPs) expressed their willingness to support the implementation of the Kamala Dhalkebar-Bagmati road section including readiness to relocate affected structures and assets situated within the designated Right-of-Way (RoW), subject to the applicable compensation, assistance, and other entitlements set out in the RAP Addendum.

Furthermore, consultations also indicated that PAPs were informed of the status of affected structures located within the RoW, predominantly located on government-owned land and expressed an understanding of cash compensation assistance and entitlement provisions applicable to their verified affected assets, in accordance with the provisions outlined in this RAP addendum. The consultation process provided an opportunity to explain the applicable entitlements and address questions and concerns raised by affected households. A Summary of the consultations is provided in annex-4

6. Socio-economic Baseline

The socio-economic baseline condition of verified 219 project affected households (PAH) are generally comparable to those documented in the original RAP, as the project affected households are from the same project area with broadly similar socio-economic settings. A total of 219 households were verified as being households directly affected by the KDB road (East) upgrading project. The average household size is reported as 5.7 persons, which is higher than national average of 4.8 persons. The total affected population is approximately 1200, comprising 51% males and 49% females. All identified PAHs were conducted during the verification survey, and there anywhere no absentee households reported. In terms of caste/ethnicity, the survey reported 55 Brahmin/Chhetri households (25.11%), 56 Hill Janajati households (25.57%), 2 Tarai Janajati households (0.91%), 10 Hill Dalit households (4.57%), 4 Tarai Dalit households (1.83%), 91 Tarai Caste households (41.55%), and 1 Muslim household (0.46%). Business is the predominant occupation among the project affected households followed by agriculture, wage and foreign employment. The overall literacy rate is 85%, segregated as male 48.5. % and female 36.5 %. The average annual income of project affected households is NRs 50,200 which is lower than national level figures of NRs. 72,908. About 3 % of affected households were identified as being below the poverty line threshold.

6.1 Demography

This analysis gives the basic socio-economic profile of the 219 households affected by the project identified through the verification survey. It highlights key characteristics including population details, cultural background, caste/ethnicity, main occupations, and income and expenses. The analysis provides an updated understanding of the socio-economic conditions the households provide and informs the assessment of project impacts, vulnerability, and applicable resettlement and livelihood support measures.

6.1.1 Population and Household

Table 6-1: Population Distribution **of the project affected surveyed HHs (**baseline survey, 2025)

District	Municipality	Household	Population			Family Size
			Male	Female	Total	
Danusha	Ganeshman Charanath Municipality	20	66	72	139	6.95
	Dhanusadham Municipality	11	32	28	60	5.45
	Mithila Municipality	64	165	154	319	4.98
Mahottari	Bardibas Municipality	9	29	24	53	5.8
	Gaushala Municipality	8	25	11	36	4.5
Sarlahi	Ishworpur Municipality	14	35	33	67	4.7
	Hariwon Municipality	32	98	92	190	5.9
	Bagmati Municipality	33	88	91	179	5.4
	Lalbandi Municipality	28	77	80	157	5.6
Total		**219**	**615**	**585**	**1200**	**5.47**
Percentage			**51.25**	**48.75**	**100**	

In the project area, 219 households with a total of 1200 affected people were identified. Of these, male account for 51.25% and 48.75% are female, which is slightly lower than the national female average of 51%. The average household size is 5.7 %, higher than the national average of 4.8. Details are shown in Table 6-1.

6.2 Caste/Ethnicity

The 219 households across the three lots. Of these, 82 are in Lot-1, 32 in Lot-2, and 105 in Lot-3. The largest group overall is the Tarai caste community, with 91 households, making up 41.55% of the total. In Lot-1, this group is the clear majority, representing 67.07% of the households. The table below shows overall composition of the cast

and ethnicity.

Table 6.2: Caste and ethnic composition of PAHs

S.N.	Caste/Ethnicity	Lot-1		Lot-2		Lot-3		Total		Remarks
		HH	%	HH	%	HH	%	HH	%	
1	Brahmin/Chhetri	7	8.53	5	15.6	43	40.95	55	25.11	
2	Hill Janjati	12	14.64	13	40.6	31	29.52	56	25.57	
3	Tarai Janjati	1	1.25	-	-	1	0.95	2	0.91	
4	Hill Dalit	7	8.53	1	3.1	2	1.90	10	4.56	
5	Tarai Dalit	-	-	2	6.25	2	1.90	4	1.82	
6	Tarai Caste	55	67.07	11	34.37	25	23.8	91	41.55	
7	Muslim		-	-		1	0.95	1	0.45	
	Total	**82**	**100**	**32**	**100**	**105**	**100**	**219**	**100**	

Baseline Survey September,2025

6.3 Educational Status of PAHs

The data profiles the educational attainment of 219 households (HH) across three housing lots. Overall, Secondary education is the most common qualification, held by 39.72% of all households. Those who are simply "literate" form the second largest group at 25.57%, followed by those with a Primary education (14.61%) and an SLC certificate (10.95%). Illiterate households make up 9.13% of the total.

Table-6-3: Population Distribution by Education Level

S.N.	Educational Status	Lot-1		Lot-2		Lot-3		Total		Remarks
		HH	%	HH	%	HH	%	HH	%	
1	Illiterate	20	24.39	-	-	-		20	9.13	
2	literate	13	15.85	10	31.25	33	31.42	56	25.57	
3	Primary	20	24.39	12	37.5	-	-	32	14.61	
4	Secondary	29	35.36	10	31.25	48	45.71	87	39.72	
5	SLC	-	-	-		24	22.85	24	10.95	
	Total	**82**	**100**	**32**	**100**	**105**	**100**	**219**	**100**	

Baseline Survey September,2025

6.4 Religion:

The community across all three lots is predominantly Hindu, with 73.05% (160 out of 219) of all households following this religion. Buddhism is the second most common faith, practiced by 26.02% of total households. Other religions are nearly absent, with only a single Muslim household (0.45% of the total) recorded in Lot-3, and no Christian households in any lot.

Table 6-4: Distribution of PAPs by Religion

S.N.	Religion	Lot-1		Lot-2		Lot-3		Total		Remarks
		HH	%	HH	%	HH	%	HH	%	
1	Hindu	57	69.51	26	81.25	78	74.28	160	73.05	
2	Buddhism	25	30.48	6	18.75	26	24.76	57	26.02	
3	Christian	-	-	-	-	-	-	-	-	
4	Muslim	-	-	-	-	1	0.95	1	0.45	
	Total	**82**	**-**	**32**		**105**		**219**	**100**	

Baseline Survey September,2025

6.5 Occupation Status of the PAHs

In the project area business is overwhelmingly the primary occupation, accounting for 158 households, which is 72.15% of the total population (219 HH). Agriculture is the second most common (21 HH, 9.59%), followed by Wages (13 HH, 5.94%), and Foreign Employment (11 HH, 5.02%). The detail status is given below.

Table 6-5: Main Occupation of Household

S.N.	Occupation	Lot-1 HH	Lot-2 HH	Lot-3 HH	Total HH	%	Remarks
1	Agriculture	9	2	10	21	9.59	
2	Business	52	21	85	158	72.15	
3	Services	4	-	6	10	4.56	
4	Industry	2	-	-	2	0.91	
5	Foreign Employment	6	1	4	11	5.02	
6	Wages	5	8	-	13	5.94	
7	Others	4	-	-	4	1.82	
	Total	**82**	**32**	**105**	**219**	**100**	

Baseline Survey September,2025

6.6 Monthly Average Income Level of Project Area PAPs

According to the Nepal Living Standard Survey (NLSS Survey 2021), the revised official poverty line in 2022-23 is estimated NRs.72, 908 per person per year. It has also aggregated the food items and non-food items and the expenses required to be above the poverty line. Accordingly, the income required for providing adequate calories (2,236 kilocalorie) for an average Nepali to be active is Rs. 35,029 at 2023 prices. For non-food items, for an average, the average income required is Rs.37, 879 at 2022/23 prices. Based on the official poverty line income at NRs. 72,908 per capita per year, 6 households with 32 population fall below poverty level among 219 project affected surveyed households. The average annual income of below poverty line population is NRs. 50200 per person per year. Based on annual income around 3 percent HH lies below poverty line.

Table: 6-6 Yearly Average Income Range

S.N.	Yearly Income Range	Lot-1	Lot-2	Lot-3	Total		Remarks
		HH	HH	HH	HH	%	
1	<50200	3	2	1	6	2.73	
2	50,200-150,000	5	5	2	12	5.47	
3	150,001–254,001	18	4	48	70	31.96	
4	254,001–391720	56	21	54	131	59.81	
5	Greater than > 391720						
	Total	**82**	**32**	**105**	**219**	**100**	

Baseline Survey September,2025

6.7 Monthly Expenditure Level of Project Area PAPs

Nearly half of the households (46.57%, or 102 households) spend more than NPR 35,000 each month, making this the largest spending group. Another 42.92% (94 households) fall in the NPR 20,001–35,000 range, showing that most families have moderately high to high expenses.

Table: 6-7 Household Monthly Expenditure Level

S.N.	Monthly Expenditure Range	Lot-1	Lot-2	Lot-3	Total		Remarks
		HH	HH	HH	HH	%	
1	<13,500	4	2	1	7	3.19	
2	13,501-20,000	9	5	2	16	7.30	
3	20,001-35,000	33	13	48	94	42.92	
4	>35,000	36	12	54	102	46.57	

	Total	**82**	**32**	**105**	**219**	**100**	

Baseline Survey September,2025

7. Comparison of National and WB ESS-5 Requirement

This section presents gap assessment of Land Acquisition Act 1977 of Nepal vis-à-vis requirements of WB ESS standards and gap fulfilment efforts taken by the Project in relation to key aspects of RAP preparation and implementation

Table 7-1. Comparison of WB's ESS5 and Land Acquisition Act 1977 Requirements for RAP

Theme	Provision within the *Land Acquisition Act* (LAA), 1977	Requirements under WBG ESS 5	Gaps and How it is to be addressed
Avoidance or impact minimization	The LAA allows land acquisition for "public purposes". It does not specify avoiding or minimizing resettlement	ESS 5 requires avoidance/minimizing of involuntary resettlement by exploring project design alternatives	The Project will avoid and minimize impacts wherever possible. An alternative analysis was carried out as a part of ESIA
Impact Mitigation	The LAA provides for compensation of land and assets and in certain cases of landlessness, for provision of replacement land. The CDC chaired by the Chief District Officer (CDO) determines criteria.	Provision of compensation at replacement cost along with rehabilitation assistance and commitment to improve and/or restore livelihoods to pre-project levels.	Compensation for affected land and assets will be provided at replacement cost in accordance with ESS5 and the RAP Entitlement Matrix. Replacement cost will be established through an appropriate valuation/market assessment and reflected in the compensation rates determined by the CDC. Where PAPs dispute the compensation rates, an independent assessment of replacement cost will be conducted and provided this Report for the CDC's consideration.
Timing of Compensation	Executing agency may acquire land by depositing money with the competent authority for compensation determination.	Possession of acquired land and related assets will be taken up by the project only after compensation has been made available and, where applicable, resettlement sites and moving allowances have been provided to the displaced persons in addition to compensation	Land access will be initiated only after payment of full compensation (except in case of legally disputed cases, if any). Forced evictions will not be carried out. PAFs will be given reasonable time (up to 12 months) to identify temporary accommodation within project area until they are able to build their new replacement houses.
Eligibility	Legally, provisions are made for landowners and registered tenants under the Constitution and the LAA. However, there are no provisions for informal rights holders, unregistered landowners, squatters, undocumented tenants, other family members or landless.	Includes: those with formal legal rights to the land/assets; those with no legal rights but with a claim to land recognized under national or customary law; or those with no recognizable legal right to land or assets	This RAP considers all PAFs including those without any recognizable legal titles (for compensation of affected structures and livelihood restoration support).
Informed Consultation and Participation	During the LA process, the CDO is the appellate authority. Otherwise, the LAA does not	Disclosure of relevant information; meaningful consultations with affected	PAFs were informed about the intended acquisition of their land and consulted multiple times in this

Theme	Provision within the *Land Acquisition Act* (LAA), 1977	Requirements under WBG ESS 5	Gaps and How it is to be addressed
	require on-going consultations with affected persons and other stakeholders.	persons communities, and other stakeholders; consultations must be on-going and inclusive	process of preparation of RAP. Their preferences for resettlement and rehabilitation options were incorporated in this RAP.
Livelihood Restoration	The legal frameworks for resettlement provide for rehabilitation of displaced settlements and compensation to affected persons through land-based resettlement strategies. However, land-based livelihood is not used as a criterion for application of such land-based resettlement strategies wherever possible.	Provision of compensation at replacement cost along with rehabilitation assistance and commitment to improve and/or restore livelihoods and standard of living to pre-project levels.	Both non-land and land-based livelihood restoration strategies are considered in this RAP.
Grievance Redress Mechanism	The affected entities may approach the CDO and/or the Ministry of Home Affairs within a defined period for compulsory expropriation. Under Clause 25.7, appeal against the compensation may be directly filed with the Ministry of Home Affairs. However, entities other than legally registered landowners and tenants are not considered.	The project is required to establish a grievance redress mechanism, which should seek to resolve concerns promptly, using an understandable and transparent consultative process that is culturally appropriate and readily accessible.	The project has established a GRM which will be used for this purpose as well. The GRM also includes access to legal redress at any stage in the process.
Special assistance for vulnerable households	The landless families with legal ownership can get additional compensation at the discretion of the CDC.	Particular attention will be paid to the needs of the poor and the vulnerable as a part of the resettlement process, however no specific package or entitlement for vulnerable groups.	Vulnerable PAFs are identified in this RAP, and specific benefits are included for them.
Support during transition	No such provision in the LAA.	Transitional support should be provided as necessary to all economically displaced persons, based on a reasonable estimate of the time required to restore their income- earning capacity, production levels, and standards of living.	The RAP makes provisions for transitional support for all PAFs who are physically displaced.

8. Resettlement Impacts of RAP Addendum

The 50m Right of Way (ROW) of this Highway was declared under the applicable Nepal government Road Act 1974 as being a National Highway and subsequently published in the Nepal Gazette dated 1977. According to engineering design, the existing RoW is sufficient to construct the proposed 4-lane, and 6-lane roads in rural and urban areas respectively and no additional private land to is needed by the project. The Project team has made

efforts to avoid and minimize involuntary resettlement impacts by optimizing technical design within the available meter's width. The original RAP identified 64 Project Affected Households (PAHs) based on the design information and field assessments available at the time of its preparation. During the RAP verification survey conducted between January and October 2025, a detailed structure-by-structure assessment was carried out throughout the project corridor. The survey verified previously identified impacts and identified additional affected structures, temporary extensions, business frontages, and roadside developments that were not fully captured in the original RAP. As a result, the number of verified PAHs increased from 64 to 219. This increase does not result from any expansion of the project footprint beyond the approved RoW, but rather, it reflects the findings of a more detailed field verification, community consultations, engineering assessments, and updated asset inventories undertaken during preparation of this RAP Addendum. The updated inventory therefore provides a more complete assessment of project impacts and eligible affected households.

To ensure the accuracy of the updated inventory and prevent the inclusion of ineligible assets, all newly identified structures were subjected to a multi-stage verification process. This included physical field verification, consultations with affected households and neighboring communities, review of available local records, validation by ward representatives, and confirmation of whether the affected structure existed prior to the approved cut-off date. Only structures and assets meeting the applicable eligibility criteria established under the original RAP and ESS5 have been included in the final inventory

Regarding the nature of impacts, of the 219 PAHs, 22 households are subject to physical displacement, 64 households experience both physical and economically displacement and 29 households experience only economic displacement. The remaining 104 households experience minor or partial impacts that do not result in physical or economic displacement. Together, these categories account for all 219 verified PAHs.

In addition to impacts on private structures and PAHs, the project will affect public and community assets located within the Right of Way (ROW), including religious structures, public service facilities, utility infrastructure, and other community assets. As these facilities provide important services to local communities, the RAP Addendum includes measures for their relocation, restoration, or replacement prior to construction to ensure continuity of services during implementation.

A total of 153 public and government structures has been verified, comprising 38 temples, 37 waiting sheds, 25 chautaras and 53 government structures as detailed in Annex 2. The cost associated with the relocation of all the affected public structures are included in Bill of Quantities (BoQ) under the relevant Provisional Sum (PS) item. The Contractors will prepare the required plan and profile, typical drawing, cost estimate and identified relocation sites consultation with communities and relevant authorities. In addition, the verification identified 2241 electric pole and facilities associated with 20 water users and sanitation committee that require relocation or other mitigation measures. The associated cost for re-establishment of these facilities has been estimated as part of the project implementation arrangements. The resettlement impacts are given in the table below.

Table 8-1 Resettlement Impacts

Original RAP, 2024					**RAP Addendum - December, 2025[2]**	
Lots	**District**	**Description**	**T.PAH**	**Ext.**	**verified PAH**	**Impact category**
1	Dhanusa (Lot 1)	Private Structures including extended parts	39	49	82	Physical displaced PAPs are 22 PAH Physical and economically displaced PAPs are 64 PAH
2	Dhanusa, Mahottari and Sarlahi (Lot 2)		15	28	32	

[2] This addendum also covers extended parts structure

3	Sarlahi (Lot 3)		7	81	105	Economically displaced PAPs are 29 PAH
Total			**61**[3]	**158**[4]	**219**	Minor loss PAPs are 104 PAH
Public Structures						
Original RAP, 2024					**RAP Addendum - December, 2025**[5]	
1	Dhanusa	Public toilets, temple, waiting shed etc.	51		46	Temple-38Chautara- 25 Waiting shed-37 Govt. structures- 53 Some public structures listed in the baseline survey were either not found during verification or had already been dismantled before the project began. Others were determined to fall outside the project's scope.
2	Mahottari and Sarlahi		42		36	
3	Sarlahi		87		71	
Total			**180**[6]		**153**	
Electric poles						
Original RAP, 2024					**RAP Addendum - September, 2025**[7]	
1	2221				1	1013
2					2	530
3					3	698
	Total		**2221**		**Total**	**2241**
Drinking water pipelines						
Original RAP, 2024					**RAP Addendum - August, 2025**	
1	33.16 Km.				9	Water Users and Sanitation Committee and well and tube also included
2					5	WUSC
3					7	WUSC
	Total				**21**	

8.1 Specific Notes on Impacted HH

Summary of Lot 1- Impacts

- As per original RAP verified 30 main structures
- In addition, 52 newly identified structures during the verification process
- Therefore, after verification, the total number of affected households is 82.

Summary of Lot 2- Impacts

[3] 3 structures from BP section have not included in this updated RAP
[4] 56 extended part structures from BP section have not included in this addendum of RAP
[5] This addendum also covers extended parts structure
[6] 36 public structures from BP section are not included in this updated RAP

- ❖ As per the original RAP, there were a total of 19 structures that were verified
- ❖ After field verification, 13 structures were identified
- ❖ Therefore, after verification, the total number of affected households is 32.

Summary of Lot 3- Impacts

- ❖ As per the original RAP, a total of 34 structure Were verified
- ❖ In addition, 71 new private structures were identified during the verification process.
- ❖ Therefore, after verification, the total number of affected households is 105.

8.1.1: Reconciliation and Traceability of Affected Households

To ensure transparency and traceability between the approved RAP (2024) and this RAP Addendum, a detailed reconciliation of affected households and structures was undertaken as part of the verification process. The reconciliation identifies PAHs/structures retained from the original RAP, newly identified PAHs, and records from the original RAP that were not retained following field verification. Non-retained records have been categorized as dismantled, removed, not found, saved, or reclassified as public structures, with the basis for each status documented in the Traceability Annex. Newly identified PAHs were included following verification of project impact and eligibility in accordance with the approved RAP and applicable cut-off date. These traceability categories reflect the outcome of verification and do not, by themselves, constitute closure of any applicable compensation, assistance, or other entitlement obligations.

The detailed PAH/structure-level reconciliation, including the status and basis for changes from the original RAP inventory, is provided in the Traceability Annex 5.

For confidentiality and personal data protection purposes, PAH names and other personal identifiers are not disclosed in the annexes. Traceability across the affected household inventory, vulnerable household inventory and reconciliation records is maintained using the respective Lot, annex serial number, chainage and location references. These references allow affected records to be cross-referenced while protecting personal information.

8.2 Compensation Payment Status of KDB up to this September, 2026

KDB Compensation Status Up to September-2026

Package	Impacts	Full Paid (100%)	First Installment (50%) Only	Non-Payment (Remaining)	Remarks
Lot-1	82	55	7	20	
Lot-2	32	30	0	2	
Lot-3	105	63	16	26	
Total	**219**	**148**	**23**	**48**	

Table-8.2 Drinking water and sanitation detail

RAP Addendum					**Original RAP**
S.N.	**Name of WUSC**	**Municipality**	**Estimated Cost**	**Remarks**	
1	Small Town Water Supply and Sanitation Committee	Lalbandi Municipality, Lot-3	39,047,516.58	All Cost Provided by Water Users Committee and Municipality	
2	Sukepokhari Water supply and Sanitation Consumer Committee	Hariwon Municipality, Lot-3	12,331,806.39		

3	Water Supply and Sanitation Consumer Committee	Hariwon Municipality, Lot-3	5146979.37		Drinking water pipeline about 33.16 km.
4	Karmaiya Water Supply and Sanitation Committee	Bagmati Municipality, Lot-3	12823993		
5	Brihat Water Supply and Sanitation Committee	Bagmati Municipality, Lot-3	79,47,218.00		
6	Netragunj Water Supply and Sanitation Committee	Lalbandi Municipality, Lot-3	36,02,787.48		
7	Ranigunj Water Supply and Sanitation Committee	Lalbandi Municipality, Lot-3	52,03,422.33		
8	Deep Well Water Supply	Ganeshman Charnath Municipality, Lot-1 Birendra Bazar-4	4,55,760.07		
9	Water Supply and Sanitation Users Committee	Mithila Municipality-Lot 1, Dhalkewar-6	7,10,1005.2		
10	Water Supply and Sanitation Users Committee	Mithila Municipality-Lot 1,2 Jamunibas-8	10,73,834.50		
11	Water Supply and Sanitation Users Committee	Mithila Municipality-Lot 1Hariharpur-9	980078.02		
12	Water Supply Pipeline	Ganeshman Charnath Municipality, Lot-1Ward No.-4	4,55,760.07		
13	Water Supply Pipeline	Ganeshman Charnath Municipality, Lot-1Ward No.-4	1,89,039.71		
14	Construction of Wells	Ganeshman Charnath Municipality, Lot-1Ward No.-4,6,7	8,62,610.87		
15	Water Supply Pipeline	Ganeshman Charnath Municipality, Lot-1Ward No.-1	8,75,694.44		

16	Water Supply Pipeline, Reserve Tank, RCC Dug well Construction	Dhanusha Dham Municipality	1800115.71		
17	Water Supply and Sanitation Users Committee	Mithila Municipality-Lot 2 Lalgadh-10	12,35,785.00		
18	Water Supply and Sanitation Users Committee	Bardibas Municipality-6 Kisan Nagar	1,65,360.00		
19	Water Supply and Sanitation Users Committee	Bardibas Municipality-8 Hattilet	1,87,895.00		
20	Small Town Water Supply and Sanitation Users Organisation	Bardibas Municipality-14	35741931.47		
21	Water Supply and Sanitation Users Committee	Mithila Municipality-Lot 2 Lalgadh-10	73,67,500.00		
	Total		**107,872,420.54**		

Table 8. 3 Project affected Electric pole need to relocation

RAP Addendum		**Original RAP**	
Lots	**Number**	**Number**	**Remarks**
Lot- 1	1013	2221	
Lot-2	530		
Lot-3	698		
Total	**2241**	**2221**	

There total 2241 electric pole and 21 water users and sanitation committee have been identified during RAP verification works. Previously, it was 2221 in original design phase RAP.

9. Mitigation Measures

Considerable effort has been made to avoid and minimize involuntary resettlement wherever possible through alternative design options and optimization of the road design within the existing RoW. The project followed the hierarchy of avoiding, minimizing, mitigating, and where impacts are unavoidable, providing compensation and appropriate resettlement and livelihood restoration assistance. Eligible affected persons will receive compensation payments for lost assets, together with applicable support for relocation, rental allowances, and compensation for disruptions to businesses and other entitlements specified in the RAP Entitlement Matrix. Compensation is calculated based on the Replacement cost that takes into account current market value of the affected assets, along with any additional costs involved to replace t the affected asset. The final replacement value is determined by the Compensation Determination Committee (CDC), after holding several rounds of consultations and negotiations with the people directly affected by the project. In addition to compensation, livelihood restoration measures will be provided, as applicable, focused on helping PAPs to restore their livelihoods. This includes support for income-generating activities like wage work, trading, and other small-scale businesses.

No additional land is required under the current engineering design as the road improvement is contained within the 50m RoW. The RoW was declared by the Government of Nepal 48 years ago as per Gazette

notification of 2034-03-20 BS (04-07-1977 AD). As such, no compensation for land is envisaged where the affected land is confirmed to form part of the government-owned RoW. However, this does not preclude compensation or assistance for eligible structures, assets, livelihood impacts, or other losses within the RoW, as provided under the RAP Entitlement Matrix.

Eligible PAHs affected by road upgrading within the RoW will receive compensation and assistance for verified losses in accordance with the RAP Entitlement Matrix. Applicable assistance includes structures dismantle allowance, business disruption allowance, rental stipends allowance and livelihood restoration training. Vulnerable households identified under the RAP, including Dalits, ethnic minorities, women-headed households, HHs falling below the applicable poverty threshold, and HHs with aged members meeting the vulnerability criteria, will receive additional assistance as specified in the RAP. Livelihood restoration training will also be provided to eligible vulnerable households and roadside vendors as provisioned in original RAP. Affected Public structures will be relocated, restored or replaced after development of appropriate re-medial relocation plan developed in in consultation with the concerned communities and authorities for affected chautaras and associated religious or culturally significant trees, relocation or replanting arrangements will be developed through consultation with the relevant communities, taking account of applicable cultural and ritual practices.

Effective operation of the GRM is integral part of the project's stakeholder engagement and resettlement implementation arrangements. The Project office will monitor RAP implementation and grievances raised by affected persons and communities. The social mobilizers will support grievance registration, record keeping and acknowledgement and follow up. The Social Development and Resettlement Specialist of CSC will facilitate the GRC meeting and document agreed resolutions, support implementation and monitoring of the RAP, and prepare periodic progress reports for DoR-DCID and the World Bank.

10. Cost Estimation and Relocation Arrangement

Compensation cost estimation and relocation planning are key activities in RAP implementation. The principal direct resettlement impacts include the loss or partial loss of private, public and community structures. Consultations have therefore been undertaken with affected households, local community and relevant local stakeholders to inform compensation and relocation arrangements. The cost estimation has been prepared based on current district rates (2082-083) with the standard norms of Department of Urban Development and Building Construction (DUDBC). The cost has been estimated for full loss and partial structures. These estimates will inform the determination of compensation at replacement cost in accordance with the RAP Entitlement Matrix. Where structure is fully affected and require relocation, eligible household in addition to compensation at replacement cost, will receive applicable relocation assistance including rental stipend allowance. Partially affected households will remain in their existing houses where the unaffected portion is confirmed to be safe and still viable for continued use. Therefore, no relocation would be required. During community consultations, the majority of project affected persons preferred cash compensation for all eligible losses of private assets. For affected public and community assets, relocation, restoration, or replacement will be undertaken, as appropriate. Suitable relocation sites are being identified and confirmed in consultation with the affected communities and relevant authorities.

11. Compensation Disbursement

As provisioned in Land Acquisition Act- 2034 B.S (1977 AD) the Compensation Determination Committee (CDC) has been formed and determined compensation rates, and verified the ownership and eligibility of affected properties and assets. In determining the compensation, the CDC considered all types of losses arising from project impacts, including applicable displacement and other assistances. The replacement values for affected assets were determined following a series of investigations and collection of market rates from Bank and input from the Department of Urban Development and Building Construction (DUDBC). Compensation has included all assistance as per the Entitlement Matrix, which was provided for CDC's consideration and, upon determination of value representing replacement, has adopted as needed. Compensation payments are made directly into the bank accounts of the project-affected households. Furthermore, eligible affected persons receive applicable assistance including

business disruption allowance and rental stipends allowance for affected persons whose business are fully affected requiring rental services.

Eligible affected households will receive compensation and assistance based on the RAP entitlement matrix. The package includes cash compensation for the loss of assets at replacement value as determined through the Compensation Determination Committee (CDC).The compensation includes all allowances and livelihood restoration training including employment in construction as per the Entitlement Matrix for replacement value. Compensation and applicable assistance will be provided to eligible affected households in accordance with the RAP Entitlement Matrix and the agreed implementation schedule, prior to displacement or loss of access to the affected assets, as applicable.

12. Entitlement Framework

The entitlement framework for this RAP addendum is based on the provision of Land Acquisitions Act, 2034 B.S., and the approved RAP (2024), and World Bank ESS-5. This entitlement framework recognizes both titleholder and non-title holder for impacts on private structures with compensation determined according to the nature of the impact and applicable eligibility criteria. In determining the compensation, the CDC have considered the eligible losses incurred by persons from to project acquisition impacts, including shifting of residence, economic displacement, relocation requirements, and disruption of businesses and livelihoods, as applicable.

The entitlement framework also covers public, government and community structures affected by the project. Rehabilitation and relocation plan will be developed for their movement in consultation with the concerned local community and relevant government authorities. In the case of community assets, relocation will happen during this project implementation phase in consultation with affected and user communities, including Dalits, IPs and vulnerable groups to ensure that affected facilities and community functions are appropriately restored.

Applicable displacement-related assistance, including rental assistance, shifting allowances, business disruption assistance, vulnerability assistance and other transitional support measures, shall be provided in accordance with the approved Entitlement Matrix. No reduction in entitlements has been introduced through this RAP Addendum. Compensation rates and implementation arrangements have been updated to reflect current replacement rates and implementation conditions, and the underlying eligibility and entitlement principle established under the approved RAP remain to improve, or at least restore, the livelihoods of the affected household shall remain applicable.

This RAP Addendum does not introduce any material reduction in the entitlements established under the approved RAP (2024). Compensation and the various forms of assistance are treated as distinct entitlements and apply according to the type and extent of impact and the eligibility of the affected household. Accordingly, a PAH may qualify for more than one forms of assistance, including rental assistance, shifting and dismantling allowances, business disruption assistance, vulnerability assistance, and livelihood restoration support, where applicable. Where compensation rates have been updated to reflect current approved rates, such updates do not reduce the underlying entitlement. In the event of any inconsistency between the approved RAP and this Addendum, the provision that provides the greater benefit to the eligible PAH shall apply.

The entitlements applicable to PAPs based on eligibility status and types and extent of impacts on private, public and community assets are summarized in Table 12.1 below:

Table: 12.1 Entitlement Matrix[8]

Type of Loss	Entitlement Unit	Description of Entitlements	Implementation Measures
1. House and Associated Structures			
1.1 Loss of Residential House	Owners of the structures both titleholders and those without legal title, including informal occupiers) whose eligible residential structures were established before the applicable cut-off date.	Partially impacted (i.e., where the unaffected portion of structure is technically assessed and confirmed to be structurally safe and still viable for use and no relocation is required. The viability of the remaining structure will be confirmed by the implementing agency in consultation with the affected household during	• Cash compensation at replacement cost for the affected portion. • Right to retain salvageable materials without deduction from compensation. • Affected households will be notified 3 months in advance of the date of construction • Issuance of notice with the time of 35 days for compensation claim • Applicable dismantling and shifting allowance equivalent to current wage rate base on structure size and type, as provided in the approved RAP Entitlement Matrix.
	Owners of the structures. Both titleholders and those without legal title, including informal occupiers losing their residential structures and have to physically relocate.	Fully affected residential structure or whose structure is no longer viable for residential use.	• Cash compensation at replacement cost without depreciation for the entire structure • Rental stipend allowance equivalent to 3 months' minimum wage • Applicable dismantling and shifting assistance • Affected households will be able to salvage materials free of cost. • PAFs will be given reasonable time (up to 12 months) to secure alternative accommodation within project area.

[8] The assistance provisions in this matrix represent separate forms of support applicable according to the type and severity of impact and should not be interpreted as alternative rates for the same entitlement. Similarly, the three-month advance notification prior to construction/relocation and the 35-day notice for the compensation claim process apply to different stages and purposes of RAP implementation. This Addendum does not reduce the entitlements established under the approved RAP (2024); where any inconsistency in entitlement arises, the provision providing the greater benefit to the eligible PAH shall prevail.

			• No household will be required to vacate before applicable compensation and assistance have been provided. • Additional assistance for eligible vulnerable households if applicable.
1.2 Residential cum commercial structures	Owners of the structures with legal title and those without legal title, including informal occupiers	Partially impacted (i.e., where unaffected portion of the structure is technically assessed and confirmed to be structurally safe and still viable for the use and no relocation is required. The viability of the remaining structure will be confirmed by the implementing agency in consultation with the affected household during the implementation	• Cash compensation at replacement cost without depreciation for the affected portion. • Business disruptions allowance equivalent to one-month minimum wage • Affected household will be notified 3 months in advance of the date of construction. • Applicable dismantling and shifting assistance • Affected households will be able to salvage materials free of cost. • Livelihood restoration support where the impact results in economic displacement.
	Owners with legal titles and those without legal titles, including informal occupiers.	Full loss of residential-cum-commercial structure or whose structure is no longer viable for residential and commercial use.	• Cash compensation at replacement cost without depreciation for the entire structure • Rental stipend allowance equivalent to 3 months' minimum wage • Applicable dismantling and shifting assistance • Affected households will be able to salvage materials free of cost. • PAFs will be given reasonable time (up to 12 months) to secure alternative structure within project area. • No household will be required to vacate before applicable compensation and assistance have been provided. • Livelihood restoration support. • Additional vulnerability assistance, where applicable.

1.3 Commercial structure	Owners of structures with titles and those without titles including informal occupiers losing partial commercial structures.	Partially affected where unaffected portion of the structure is technically assessed and confirmed to be structurally safe and still viable for the use and no relocation is required. The viability of the remaining structure will be confirmed by the implementing agency and in consultation with affected household during the implementation	• Cash compensation at replacement cost without depreciation for the affected portion. • Business disruptions allowance equivalent to one-month minimum wage • Affected household will be notified 3 months in advance of the date of construction. • Applicable dismantling assistance • Affected households will be able to salvage materials free of cost. • Livelihood restoration support where the impact results in economic displacement.
	Owners of structures with legal title and those without titles including informal occupiers losing their commercial structures and who have to physically relocate	Fully affected or structure no longer viable for use.	• Cash compensation at replacement cost without depreciation for the entire structure • Reconstruction, rental stipend and shifting allowance equivalent to two months' rent at current rate. • Allowance for loss of income. • Affected household has notified 3 months in advance of the date of construction. • Affected households will be able to salvage materials free of cost. • No household will be required to vacate before applicable compensation and assistance have been provided. • Livelihood restoration support. • Additional vulnerability assistance, where applicable.

Type of Loss	Entitlement Unit	Description of Entitlements	Implementation Measures
1.4 Associated and ancillary structures (Kitchen + store, bathrooms etc.	Owners of the structures both title holders and those without titleholders including informal occupiers	Loss or damage to eligible assets	• Cash compensation at full replacement cost without depreciation Affected households will be able to salvage materials without any cost.
Moveable structures and temporary Extensions	Owners of the structures both titleholders and those without titleholders including informal occupiers	Loss or damage to assets, business disruptions	• Shifting cost as per size as provisioned in entitlement matrix • Where an asset is fixed or cannot reasonably be restored through shifting, compensation at replacement cost will be provided, as applicable. • Access to Livelihood and skill training measures.
1.6. Dismantling and transportation	Titleholder Non-Titleholder	Each displaced household will be entitled to dismantling, shifting and transportation assistance to cover eligible costs associated with moving affected structures, household belongings, equipment, inventories, or business assets.	• Displaced households will receive a housing displacement allowance. @20000 Decided during consultation with PAHs, based on national nominal monthly wage rate 19500 of 26 days @ RS.769 per day* 26 • Structure dismantling and transportation assistance will be provided based on the type of structure on actual cost basis. • These amounts are additional to compensation for affected structures and assets. • No dismantling or transportation allowance will be deducted from replacement-cost compensation.

1.7 Vulnerable social categories and livelihood restoration	Non-Titleholder titleholder	Affected households meeting the vulnerability criteria established in the approved RAP, including eligible Female headed and elder citizen, Dalit groups, persons with disabilities, and other households identifies as Marginalized and vulnerable group through the verification survey.	• Eligible Vulnerable project affected households will receive onetime economic rehabilitation grant of one month's wages established by CDC • Priority Access to livelihood restoration and skill training measures to support re- establishment of livelihoods. • Preferential access to project related employment opportunity on KDB road project as appropriate and consistent with project labor requirements.
2. Community/Government Structures and Resources			
public, government, religious, and Community structures includes: waiting shed, community hall, toilets, temples, tap stand	Local Community, religious institutions, user groups, relevant Federal, Provincial and Local government agencies.	Loss of damage to assets partially damage	• Relocation, restoration, reconstruction, or replacement of affected assets based on their existing function and service level. • Continuity of essential public and community services during relocation. • Restoration of access and associated facilities. • Culturally appropriate treatment of religious structures, chautaras, and culturally significant trees. • Relocation sites will be identified in consultation with relevant authorities, user communities, and affected groups. • Replacement or temporary service arrangements will, where practicable, be completed before the existing facility is removed or made inaccessible.

Public utilities	Utility agencies, water-user and sanitation committees, local authorities, and affected service users	Loss or disruption of public utilities	• Relocation, restoration, protection, or replacement of affected electricity, water, sanitation, drainage, communication, and other utility infrastructure. • Temporary arrangements to maintain essential services, where required. • Restoration of affected connections and access.

13. Resettlement and Rehabilitation Assistance

Fully physically displaced residential and residential-cum-commercial PAHs are eligible for resettlement and rehabilitation assistance in accordance with the Entitlement Matrix. Such assistance includes as applicable, rental assistance, shifting and dismantling assistance, and business disruption assistance, based on the nature and extent of impact and the eligibility of the affected household. Where these measures have already been provided, their status will be reported as part of RAP implementation progress. Affected persons experiencing economic displacement are also eligible for livelihood restoration support in accordance with the Entitlement Matrix. Vulnerable affected households will receive additional assistance, where applicable, based on the vulnerability criteria and entitlements established in the RAP. In addition, eligible affected persons will be given priority, where feasible, and subject to their willingness, skills, and the requirements of available positions, for employment opportunities generated through project construction activities. Such employment opportunities will complement, rather than substitute for, other applicable compensation, resettlement assistance, or livelihood restoration measures under the Entitlement Matrix.

A. Shifting and Dismantling Allowance

Physically displaced households will be provided with shifting, dismantling, and transportation assistance in accordance with the Entitlement Matrix to cover eligible costs associated with dismantling and moving affected structures, household belongings, equipment, inventories, and other applicable assets. The shifting and dismantling allowance amount is determined based on the type and extent of displacement and the applicable rates established in the Entitlement Matrix and consultations with local stakeholders and CDC agreement. The affected private structures have been categorized into five categories made of different materials. The RAP uses NPR 20,000, based on the national monthly wage benchmark referenced in the Entitlement Matrix. The entitlement framework identifies a national nominal monthly wage of NPR 19,500, based on 26 days at approximately NPR 769 per day, with the allowance rounded/provided at NPR 20000[9]. Shifting and dismantling assistance is a separate resettlement entitlement and will be provided in addition to compensation for affected structures at replacement cost. No amount provided for shifting, dismantling, or transportation will be deducted from the replacement-cost compensation payable for an affected structure

B. Business Disruption Assistance

PAPs whose businesses or income-generating activities are temporarily or permanently disrupted as a result of project-related displacement will be eligible for business disruption assistance in accordance with the Entitlement Matrix. The business disruption assistance has provisioned (@20000) to be provided to eligible PAPs and agreed from CDC. This assistance is intended to provide transitional support for loss or disruption of business income and is separate from compensation for affected structures and other applicable resettlement or livelihood restoration entitlements.

C. Vulnerable Households and livelihood restoration

Vulnerable PAHs identified through the verification process have been assessed against the vulnerability criteria established under the approved RAP. The project vulnerable households comprising female-headed households, elderly people, and persons with disabilities. The identified vulnerable PAHs, their respective vulnerability categories, and the additional assistance for which they are eligible are presented in Annex 2. Vulnerability assistance will be provided in accordance with the Entitlement Matrix and will be additional to other applicable compensation, resettlement assistance, and livelihood restoration measures for which the affected household is eligible. For eligible vulnerable PAHs, livelihood support may include skill training and established entrepreneurship support based on assessed needs, interests, and their existing or potential livelihood opportunities. Eligible vulnerable PAHs will also be given additional priority where feasible, for employment opportunities generated through construction works subject to their willingness, skills, and the requirements of available positions. Such employment opportunities will complement, rather

[9] Rs. @769* 26 days, see labor act 2017 clause 106 sub-clause-1 national labor wage determination as per clause 107 effective from 17th July, 2025 ministerial decision made dated on 16th July, 2025

than substitute for, other applicable livelihood restoration, compensation, and resettlement assistance. Livelihood support measures have been designed proportionate to the nature and extent of livelihood impacts, and in consultation with PAPs. The training programs will be conducted based on need assessment and finalization of the training including identification of appropriate training areas, training modules, duration, and location. Indicative training areas identified includes beauty parlor, boutique mobile repair technician etc. however, the final selection of training will be based on the needs and preferences of eligible PAPs. The training program will be conducted in close coordination with municipality/ward-level institutions having relevant expertise in delivering such programs.

The Development Cooperation Implementation Division (DCID) Project Coordination Unit (PCU) will be responsible for the overall coordination and implementation of the livelihood restoration plan. The project coordinator and the safeguard team within in DCID/PCU will be responsible for overall coordination, planning, budgeting, approval and overseeing of the implementation. The Geo-Environment and Social Unit (DoR-GESU) is responsible for compliance monitoring.

14. Summary of Compensation and Resettlement Budget

The RAP Addendum budget provides for compensation and assistance required for eligible project-affected persons in accordance with the Entitlement Matrix and applicable decisions of the Compensation Determination Committee (CDC). Compensation for affected assets will be provided at replacement cost, together with applicable livelihood restoration program, transitional assistance, project information dissemination and public/stakeholder consultation, including CDC/GRC meeting cost. Where compensation is payable to eligible affected persons or households, payments will be made in accordance with the procedures established for RAP implementation and through the account of the project affected persons. RAP budget will be financed from the Government's counterpart fund and approved by the Ministry of finance (MOF).

Provision is also made through the Bill of Quantities (BoQ), as Provisional Sum items, for the relocation or rehabilitation of affected public/community structures and utilities and for the livelihood restoration program.

Table- 14.1 Summary of Compensation Cost estimation of RAP addendum

S. N	Items	Number of structures	Total Estimated Cost in (NRS)	Remarks
A. Private Structures				
1	Compensation of total private structures	219	68805846.12	Included dismantle and business disruption assistance into item 1
1.1	Cost of dismantle assistance (Rental if require)	22	@ 20000 per eligible case	
1.2	Cost of business disruption assistance	64	@ 20000 per eligible case	
B. Public Structures				
2	Public Structures		Cost is included in BoQ as PS item, cost estimation is being done	
3	Livelihood restoration program to vulnerable & indigenous people		Cost is included in BoQ as PS item	

Note: Public Structures:

The rehabilitation and relocation cost of the public/community structures/utilities has been allocated in Bill of Quantity (BoQ) and used Provisional Sum.

15. Grievance Redress Mechanism

The Grievance Redress Mechanism (GRM) established under the approved RAP will continue to apply to this RAP Addendum, and the detailed procedures and institutional arrangements provided in Chapter 7 of the original RAP remain applicable. The GRM provides an accessible mechanism for Project-Affected Persons (PAPs) and other stakeholders to raise concerns related to compensation, eligibility and entitlements, resettlement assistance, livelihood restoration, construction-related impacts, information disclosure, and other project-related matters. The mechanism is available at no cost to complainants, allows confidential and anonymous complaints, and does not restrict access to available administrative or judicial remedies.

The existing two-tier Grievance Redress Committee (GRC) arrangement will be retained. At the first level, grievances will be addressed by the Project-Level/Local GRC, chaired by the Project In-Charge (PIC), with participation from the CSC social safeguard specialist, contractor representatives, PAP representatives, and relevant ward/municipality representatives. Complaints may be submitted through the channels established under the original RAP, including written submissions, email, telephone, verbal submission at relevant project offices, and the DoR-DCID online GRM portal. Where a grievance is not resolved at the project level, it may be escalated to the second-level GRC at DoR-DCID. Grievances will be registered, assessed, documented, responded to, and tracked through closure in accordance with the procedures and timelines established in the original RAP.

Information on the GRM will continue to be communicated during stakeholder consultations and RAP implementation. The Project will maintain records of grievances, resolutions, outstanding cases, and follow-up actions and include these in RAP monitoring and reporting. Separate mechanisms established for worker-related grievances and SEA/SH-related grievances will continue to operate in accordance with the arrangements established under the Project. The detailed GRM structure, procedures, escalation arrangements, and grievance-resolution process are provided in Chapter 7 of the approved RAP (2024) and remain applicable to this RAP Addendum. The institutional arrangements established under the original RAP will continue to apply to the implementation of this RAP Addendum. At the central level, DoR-DCID, through the Project Coordination Unit (PCU), will retain overall responsibility for coordination, management, and oversight of RAP implementation. DoR-GESU will be responsible for compliance monitoring of the environmental

16. Institutional Arrangement and Responsibilities

The institutional arrangements established under the original RAP will continue to apply to the implementation of this RAP Addendum. At the central level, DoR-DCID, through the Project Coordination Unit (PCU), will retain overall responsibility for coordination, management, and oversight of RAP implementation. DoR-GESU will be responsible for compliance monitoring of the environmental and social requirements associated with RAP implementation.

At the project level, the Project Office, headed by the Project In-Charge (PIC), will be responsible for day-to-day implementation of the RAP Addendum, including coordination of verification of affected persons and assets, compensation and resettlement assistance, stakeholder engagement, grievance management, and other implementation activities. The PIC will coordinate with the Compensation Determination Committee (CDC), Grievance Redress Committee (GRC), District Administration Offices, local governments, and other relevant agencies, as applicable.

The Construction Supervision Consultant (CSC), through its social specialists and mobilizers, will support the Project Office in verification, compensation processes, communication with PAPs, grievance management, maintenance of implementation records, and monitoring of RAP activities.

Implementation will also include continued information disclosure and consultation with affected persons, communication of applicable entitlements under the approved Entitlement Matrix, coordination of livelihood restoration and other assistance measures, and monitoring and reporting on

RAP implementation. The institutional arrangements and responsibilities established under the original RAP remain applicable except where specifically updated or clarified through this RAP Addendum.

17. Monitoring, Evaluation and Reporting

The monitoring and evaluation framework established under the original RAP will continue to apply to this RAP Addendum. Monitoring will assess the progress, compliance, and effectiveness of RAP implementation, including compensation and resettlement assistance, livelihood restoration, stakeholder engagement, grievance management, and restoration of affected persons' livelihoods and living standards.

Internal monitoring: Internal monitoring will be undertaken regularly by the Project, with support from the Construction Supervision Consultant (CSC) and the relevant social specialists of DCID/PCU. Monitoring will cover, among other aspects, verification of affected persons and assets, compensation payments, delivery of resettlement and rehabilitation assistance, livelihood restoration measures, information disclosure and consultations, grievance resolution, and maintenance of implementation records. Internal monitoring will also verify that applicable compensation and resettlement assistance are provided in accordance with the RAP and Entitlement Matrix and within the required implementation timeframe relative to displacement and commencement of civil works.

Compliance Monitoring: DoR-GESU will undertake periodic compliance monitoring to assess the overall implementation of the RAP and its consistency with the approved RAP, this RAP Addendum, and applicable environmental and social requirements. Compliance monitoring will also identify outstanding obligations and corrective actions required to address implementation gaps.

External monitoring: This will continue to be undertaken by an independent consultant/agency in accordance with the arrangements established in the original RAP. External monitoring will assess RAP implementation, including compensation and rehabilitation assistance, livelihood restoration outcomes, information disclosure and consultation, the effectiveness of the grievance mechanism and the overall effectiveness of RAP implementation. Particular attention will be given to determining whether affected persons experiencing economic displacement have improved or, at a minimum, restored their livelihoods and living standards. ToR for the External monitor is attached in Annex –XI of the original RAP.

Evaluation and completion audit: An independent consultant, appointed through a competitive process, will periodically evaluate whether RAP implementation has achieved its objectives. The evaluation will include a completion audit to confirm implementation of RAP measures and identify any gaps requiring corrective action. Using the RAP socioeconomic baseline, the consultant will finalize evaluation indicators and conduct a sample survey covering 25% of PAFs, with an end-of-project assessment to evaluate resettlement outcomes.

Monitoring findings will be documented through the RAP reporting arrangements established under the original RAP and will be used to identify and address implementation gaps in a timely manner.

18. RAP implementation Schedule

RAP implementation schedules include RAP verification works, notification for acquisitions and compensation claim. It also includes modality of compensation disbursement as per land acquisition act, 2034 and WB ESS-5 with preparation of data base and proper documentation to receive compensation and updates payment status. The livelihood restoration program, supporting assistance, project information dissemination and public/stakeholder consultation, internal / external monitoring

including GRC meeting are the prime activities RAP implementation. The RAP implementation schedule and project affected details are given into annex.

Table 17.1: RAP Implementation Schedule

S.N	Milestone	Key outputs	Timeframe
1	Finalize addendum data	Reconciliation of PAH/structure counts across narrative/Table 8.1/Annexes; validation of CDC rate sheets; update entitlement quantifications.	**Completed**: December, 2025
2	engagement	Community consultations with newly affected PAHs	**Completed**: September, 2025
3	Payment readiness	Preparation and verification of payments dossier for all eligible PAHs.	Completed" December, 2025
4	Compensation & allowances	Pay replacement-cost compensation and applicable allowances (housing displacement, business disruption, moving/transport; vulnerable top-ups).	**Ongoing** compensation distribution started from December, 2025
5	Dismantling/relocation	PAPs salvage materials; provision of moving/transport; provide rental stipend where applicable; access restoration for businesses.	**Ongoing,** will be completed by June, 2026
6	Targeted LRP start	Enroll eligible HHs to LRP	41PAH by October 2026
8	Commence works	Contractor commences work after compensation payment and demolition.	Ongoing, started for sections where demolition and full compensation is made since December, 2025. No works ongoing in locations with outstanding compensation.
9	Monitoring & reporting	Monthly internal monitoring (payments, relocation, LRP enrolment, GRM) and semi-annual external monitoring.	Ongoing: Throughout RAP implementation
	Independent external monitoring		**December, 2026**
10	Completion audit & closure	Independent completion audit verifies living standards restored (or improved); RAP closure report issued.	Pending: Post implementation (prior to closing) (Jan, 2027)

Annexes:

Annex-1 Project Affected Private Structures, Lot-1

Annex-2 Project Affected Vulnerable Structures

Annex-3 Project Affected Public Structures,

Annex-4 Summary of community consultation

Annex 5: Reconciliation and Traceability of Original RAP and RAP Addendum PAHs/Structure

Annex1: 1.1Project Affected Private Households Lot-1

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road

Projected Affected Private Structures, Kamala Canal to Badahari Bridge Section (Lot-1, 238+030 to 260+100, 22.070km)

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
Projected Affected Households from Original RAP																				
1	LS	6.00	1-RP-8-OR	237+355	Dhanusha	Ganeshman Charnath	8	Portaha	10.10	3.60	36.36	36.36	1	Tile Roof,+Bamboo+mud wall, floor pcc	2075	Business	8,800.00	319,968.00		Original RAP
2	LS	24.00	2-BY-8-OR	238+040	Dhanusha	Ganeshman Charnath	8	Portaha	4.60	3.60	16.56	16.56	1	Mud house (CGI roof)	2075	Business Hut	9,900.00	163,944.00		
									4.60	2.50	11.50	11.50	1	Temporary Taharo		Chhapro	2,750.00	31,625.00		Original RAP
3	RS	10.00	3-DG-8-OR	238+040	Dhanusha	Ganeshman Charnath	8	Portaha	2.70	4.00	10.80	10.80	1	Tile roof +tin		Business Hut	9,900.00	106,920.00		Original RAP
4	LS	12.00	4-BP-7-OR	238+100	Dhanusha	Ganeshman Charnath	7	Portaha	3.40	3.60	12.24	12.24	1	CGI sheet+Bamboo wall mud floor		Business Hut	9,900.00	121,176.00		Original RAP
5	LS	20.00	5-SM-7-OR	238+190	Dhanusha	Ganeshman Charnath	7	Portaha	6.60	6.50	42.90	42.90	1	Roof CGI sheet mud+bamboo wall	2078	Residence+ Business	9,900.00	424,710.00		Original RAP
									6.60	2.40	15.84	15.84	1	Temporary Taharo		Taharo	2,750.00	43,560.00		Original RAP
6	RS	24.30	6-SS-7-OR	239+520	Dhanusha	Ganeshman Charnath	7	Godar	2.15	0.70	1.51	1.51	1	RCC slab with brick wall house with steel staircase	2078	Store /Business	24,200.00	36,421.00		Original RAP
	RS	23.00		239+550							-	1.00	1	TOILET with Septic tank	2078	Toilet	24,200.00	24,200.00		

7	RS	23.40	7-PS-6-OR	239+890	Dhanusha	Ganeshman Charnath	6	Godar	7.35	1.60	11.76	11.76	1	RCC Slab with brick masonry house	2064	Residence	24,200.00	284,592.00	 Original RAP
					Dhanusha	Ganeshman Charnath	6	Godar	3.30	1.60	5.28	5.28	1	CGI sheet, brickwork in cement mortar		Residence	16,500.00	87,120.00	Original RAP
8	RS	23.50	8-KS-6-OR	239+910	Dhanusha	Ganeshman Charnath	6	Godar	6.00	1.70	10.20	10.20	1	CGI sheet roof, brick cement wall, floor cemented house	2077	Business Hut	16,500.00	168,300.00	 Original RAP
9	RS	19.00	9-SH-1-OR	244+240	Dhanusha	Ganeshman Charnath	1	Chaghariya	4.50	4.00	18.00	18.00	1	Roof CGI sheet,mud wall with bamboo, floor mud	2077	Business Hut	9,900.00	178,200.00	 Original RAP
10	LS	23.20	10-ML-9-OR	246+400	Dhanusha	Dhanusha Dham	9	Bhimwan	2.80	2.80	7.84	7.84	1	Tile roof,brick cement wall, floor cemented	2078	Business Hut	12,100.00	94,864.00	 Original RAP
									4.00	2.30	9.20	9.20	1	Temporary Taharo			2,750.00	25,300.00	 Original RAP

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
11	LS	16.00	11-LH-4-OR	251+820	Dhanusha	Mithila	4	Puspabalpur	6.00	4.10	24.60	24.60	1	Tile roof, bamboo/mud wall, mud floor house	2074	Business Hut	8,800.00	216,480.00		Original RAP
											-	1.00	1	Toilet		Toilet	17,600.00	17,600.00		Original RAP
12	RS	21.00	12-LA-4-OR	251+880	Dhanusha	Mithila	4	Puspabalpur	5.20	5.70	29.64	29.64	1	Tile roof, bamboo/mud wall, mud floor house	2071	Business Hut	8,800.00	260,832.00		Original RAP
13	RS	19.40	13-GS-4-OR	251+890	Dhanusha	Mithila	4	Puspabalpur	5.00	8.90	44.50	44.50	1	Tile roof, bamboo/mud wall, mud floor house with toilet	2059	Residence	8,800.00	391,600.00		Original RAP
									2.70	4.00	10.80	10.80	1	Roof CGI brick cemented wall,floor cemented	2074	Business Hut	16,500.00	178,200.00		Original RAP
									3.60	3.80	13.68	13.68	1	Temporary Taharo		Chhapro	2,750.00	37,620.00		Original RAP
14	LS	21.00	14-PS-3-OR	253+920	Dhanusha	Mithila	3	Lalvitti	4.40	11.30	49.72	49.72	1	Tile roof, mud+ wooden wall, mud floor house	2075	Residence	8,800.00	437,536.00		Original RAP
15	RS	23.90	15-SS-3-OR	255+338	Dhanusha	Mithila	3	Shreepur	15.40	4.20	64.68	64.68	1	Roof cement tile,bamboo+ mud floor, pcc piller wood	2076	Residence	8,800.00	569,184.00		Original RAP
16	LS	20.00	16-BM-5-OR	256+186	Dhanusha	Mithila	5	Near Basai Bridge	4.90	6.30	30.87	30.87	1	Roof CGI sheet+CGI+ bamboo wall and mud tea shop	2077	Business Hut	9,900.00	305,613.00		Original RAP
17	RS	22.30	17-RS-6-OR	257+145	Dhanusha	Mithila	6	Dhalkebar	4.40	2.70	11.88	11.88	1	Roof CGI sheet +wood Brick cement wall floor pcc	2076	Business Hut	16,500.00	196,020.00		Original RAP
		16.50							5.30	4.40	23.32	23.32	1	Temporary Taharo			2,750.00	64,130.00		Original RAP
18	LS	23.10	18-BY-6-OR	257+345	Dhanusha	Mithila	6	Dhalkebar	7.80	1.90	14.82	14.82	1	Roof asbestos + wood Brick cement wall Floor pcc	2059	Business	16,500.00	244,530.00		Original RAP
19	RS	23.30	19-LS-6-OR	257+408	Dhanusha	Mithila	6	Dhalkebar	14.40	2.70	38.88	38.88	1	Roof asbestos + bamboo brick cement wall floor pcc	2045	Business	16,500.00	641,520.00		Original RAP

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
20	RS	17.40	20-JM-7-OR	256+600	Dhanusha	Mithila	7	Near Munici.	4.50	3.50	15.75	15.75	1	Roof tile bamboo mud wall floor mud	2076	Residence	8,800.00	138,600.00		Original RAP
21	LS	22.00	21-BS-8-OR	259+800	Dhanusha	Mithila	8	Jamunibas			-		2	Toilet-without septic tank	2072	Toilet	17,600.00	35,200.00		Original RAP
Project Affected Household from extended part temporary structures of original RAP																				
1	RS		1-DM-9-ET	248+735	Dhanusha	Dhanushdham	9	Kanchchi bazar	3.30	3.50	11.55	11.55	1	Roof cement tile Bamboo wall mud floor	2075	Business	8,800.00	101,640.00		From Extended
2	LS	16.60	2-RM-3-ET	253+940	Dhanusha	Mithila	3	Lalvitti	4.30	3.80	16.34	16.34	1	Tile roof ,mud +wooden wall ,mud floor	2072	Chhapro	8,800.00	143,792.00		From Extended
3	RS	19.3	3-RB-6-ET	257+159	Dhanusha	Mithila	6	Dhalkebar	2.80	1.70	4.76	4.76	1	Roof CGI sheet Brick wall floor cement	2070	Business	16,500.00	78,540.00		From Extended
									6.00	2.00	12.00	12.00	1	Truss CGI open floor, No wall	2070		9,900.00	118,800.00		From Extended
4	RS	19.30	4-RM-6-ET	257+167	Dhanusha	Mithila	6	Dhalkebar	10.30	5.00	51.50	51.50	2	Rcc House Brick Cement wall Pcc floor	2068	Business/Residence	24,200.00	2,492,600.00		From Extended
									5.50	4.00	22.00	22.00	1	Roof asbestos + wood brick cement wall floor pcc	2068	Business	16,500.00	363,000.00		From Extended
5	LS	22.70	5-DS-7-ET	257+830	Dhanusha	Mithila	7	Dhalkebar	6.40	2.30	14.72	14.72	1	roof GI sheet brick cement wall floor PCC	2062	Residence	16,500.00	242,880.00		From Extended
6	LS	22.4	6-RY-7-ET	258+230	Dhanusha	Mithila	7	Near Municipality	2.30	3.30	7.59	7.59	1	CGI roofing +wood wall Bamboo+mud +attached brick cement wall	2076	Residence/ Business	9,900.00	75,141.00		From Extended
7	LS	22.30	7-RY-7-ET	258+255	Dhanusha	Mithila	7	Near Municipality	4.80	9.00	43.20	43.20	1	roof tile+wood bamboo+mud wall,Cattle shed temp. structure	2068	Residence	8,800.00	380,160.00		From Extended
8	LS	22.30	8-DY-7-ET	258+255	Dhanusha	Mithila	7	Near Municipality	3.30	2.60	8.58	8.58	1	roof tile+wood bamboo+mud wall	2074	Kitchen	8,800.00	75,504.00		From Extended

9	LS	17.90	9-R-8-ET	259+820	Dhanusha	Mithila	8	Dhalkebar	5.10	8.80	44.88	44.88	1	Cement tile wood+mud House	2068	Business	8,800.00	394,944.00		From Extended

Newly Identified Project Affected Households of RoW																				
1	LS	24.70	1-SS-8-N	238+815	Dhanusha	Ganeshman Charnath	8	Portaha	4.65	0.90	4.19	4.19	1	CGI roof, Block wall, floor cemented, single story old house	2075	Business	16,500.00	69,052.50		New identified from RoW
									4.65	3.70	17.21	17.21	1	CGI sheet +wooden post no wall			9,900.00	170,329.50		
2	LS	23.70	2-BS-7-N	238+940	Dhanusha	Ganeshman Charnath	7	Portaha	22.40	1.30	29.12	29.12	1	CGI roof,brick wall,cemented floor,one story house	2065	Business	16,500.00	480,480.00		New identified from RoW
									3.30	1.00	3.30	3.30	1	CGI roof,brick cement wall, cemented floor		Business	16,500.00	54,450.00		
3	RS	23.50	3-RY-7-N	239+400	Dhanusha	Ganeshman Charnath	7	Godar bazar	18.25	1.50	27.38	27.38	1	CGI roof,brick masonary , open wall,floor cemented house	2065	Abandoned House	16,500.00	451,687.50		New identified from RoW
4	RS	24.10	4-MM-7-N	239+410	Dhanusha	Ganeshman Charnath	7	Godar bazar	9.10	0.90	8.19	8.19	1	RBC roof with brick wall house (old house)	2050	Abandoned House	16,500.00	135,135.00		New identified from RoW
5	RS	23.00	5-RS-6-N	239+575	Dhanusha	Ganeshman Charnath	6	Godar bazar	3.10	2.00	6.20	6.20	1	Tile roof,brick cemen wall,floor cemented (projection only)	2072	Business	8,800.00	54,560.00		New identified from RoW
6	RS	24.00	6-BS-6-N	239+590	Dhanusha	Ganeshman Charnath	6	Godar bazar	7.05	0.90	6.35	6.35	2	RBC with brick masonry house	2060	Residence	16,500.00	209,385.00		
									6.70	1.00	6.70	6.70	1	RBC with brick masonry house		Residence	16,500.00	110,550.00		
									6.10	2.00	12.20	12.20	1	Temporary Taharo		Taharo	2,750.00	33,550.00		New identified from RoW

7	RS	22.90	7-SJ-6-N	239+620	Dhanusha	Ganeshman Charnath	6	Godar bazar	9.60	2.10	20.16	20.16	1	Roof CGI sheet +Bamboo wall			9,900.00	199,584.00		New identified from RoW
8	RS	24.20	8-BG-6-N	239+705	Dhanusha	Ganeshman Charnath	6	Godar bazar			-	1.00	1	Toilet with septic tank	2068	Toilet	24,200.00	24,200.00		New identified from RoW
9	RS	24.50	9-NG-6-N	239+710	Dhanusha	Ganeshman Charnath	6	Godar bazar	5.90	0.50	2.95	1.00	1	CGI Sheet roof,brick masonary wall, floor cemented house	2070	Residence	16,500.00	16,500.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
10	RS	23.05	10-JPKM-6-N	239+720	Dhanusha	Ganeshman Charnath	6	Godar bazar	4.90	1.95	9.56	9.56	1	Roof tile +wood brick cement wall floor pcc	2062	Business	13,200.00	126,126.00		New identified from RoW
11	RS	21.25	11-SK-6-N	239+920	Dhanusha	Ganeshman Charnath	6	Godar bazar	5.40	3.00	16.20	16.20	1	CGI roof +wood woth open wall	2072	Business Hut	9,900.00	160,380.00		New identified from RoW
12	LS	22.10	12-RS-8-N	246+255	Dhanusha	Dhanushadham	8	Bhimwan	3.40	2.50	8.50	8.50	1	Roof Tile +bamboo wall	2073	Business	8,800.00	74,800.00		New identified from RoW
13	RS	22.90	13-SL-9-N	246+990	Dhanusha	Dhanushadham	9	Near army camp	3.15	2.10	6.62	6.62	1	Roof CGI ,brick cement wall, floor cemented projection	2072	Residence	16,500.00	109,147.50		New identified from RoW
14	RS	23.20	14-UT-9-N		Dhanusha	Dhanushadham	9	Near army camp			-	1.00	1	Toilet(Charpi)			17,600.00	17,600.00		New identified from RoW
15	RS	22.00	15-AB-9-N	246+245	Dhanusha	Dhanushadham	9	Near army camp	2.70	2.80	7.56	7.56	1	Tile roof, bamboo /mud wall, mud floor wih septic tank	2072	Business	8,800.00	66,528.00		New identified from RoW
16	LS	22.00	16-KSNS-9-N	248+560	Dhanusha	Dhanushadham	9	Near army camp	6.40	3.00	19.20	19.20	1	Tile roof, bamboo /mud wall, mud floor wih septic tank		Residence	8,800.00	168,960.00		New identified from RoW
17	LS	24.75	17-LL-9-N	247+080	Dhanusha	Dhanushadham	9	Dharapani chowk	6.20	0.25	1.55	1.55	1	Rcc with brick wall house +CGI roof and truss projection only	2072	Business	24,200.00	37,510.00		New identified from RoW
18	RS	22.50	18-JM-9-N	247+610	Dhanusha	Dhanushadham	9	Dharapani chowk	9.50	2.50	23.75	23.75	1	CGI Sheet roof,brick masonary wall, floor cemented house	2073	Business	14,300.00	339,625.00		New identified from RoW
19	RS	24.20	19-AM-9-N	247+630	Dhanusha	Dhanushadham	9	Dharapani chowk	3.00	0.80	2.40	2.40	1	Tile roof ,brick +wooden cement wall ,floor cemented , plank floor	2072	Business	8,800.00	21,120.00		New identified from RoW
20	RS	23.40	20-LY-9-L	248+630	Dhanusha	Dhanushadham	9	Kanchchi bazar	7.00	4.90	34.30	34.30	1	Tile roof, bamboo/ mud wall,mud floor	2065	Residence	8,800.00	301,840.00		New identified from RoW
21	RS	22	21-DG-4-N	251+495	Dhanusha	Mithila	4	Puspabalpur	5.10	3.00	15.30	15.30	2	Tile roof, bamboo/ mud wall, wooden floor and ground floor cemented+	2065	Residence	8,800.00	269,280.00		New identified from RoW
									4.00	1.50	6.00	6.00	1	CGI Bamboo+mud	2065	Kitchen	9,900.00	59,400.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
22	LS	23.00	22-BT-4-N	251+649	Dhanusha	Mithila	4	Puspabalpur	3.30	3.30	10.89	10.89	1	Mud House with Bamboo wall	2067	Residence	8,800.00	95,832.00		New identified from RoW
23	LS	21.50	23-MG-4-N		Dhanusha	Mithila	4	Puspabalpur	4.00	3.20	12.80	12.80	1	Temporary Taharo	2074	Chhapro	2,750.00	35,200.00		New identified from RoW
24	LS	20.00	24-TB-4-N	251+900	Dhanusha	Mithila	4	Puspabalpur	5.60	4.50	25.20	25.20	1	Roof Tile+ Bamboo Wood+ Mud Wall + PCC floor	2065	Business	8,800.00	221,760.00		New identified from RoW
25	LS	21.00	25-RM-4-N	252+07	Dhanusha	Mithila	4	Puspabalpur	4.00	4.40	17.60	17.60	1	Roof CGI ,brick cement wall,floor cemented house	2062	Residence	16,500.00	290,400.00		New identified from RoW
26	LS	21.00	26-LM-4-N	252+07	Dhanusha	Mithila	4	Puspabalpur	4.20	2.10	8.82	8.82	1	Roof CGI ,brick cement wall,floor cemented house	2062	Residence	16,500.00	145,530.00		New identified from RoW
27	RS	24.00	27-DT-4-N	252+050	Dhanusha	Mithila	4	Puspabalpur	5.00	1.00	5.00	5.00	2	Tile roof ,mud +wooden wall ,floor cemented , plank floor	2072	Residence	8,800.00	88,000.00		New identified from RoW
28	LS	22.00	28-AB-4-N	252+101	Dhanusha	Mithila	4	Puspabalpur	8.90	4.00	35.60	35.60	1	Cement tile roof, Bamboo mud wall +Floor PCC	2068	Residence	8,800.00	313,280.00		New identified from RoW
29	LS	21.45	29-NM-3-N	253+500	Dhanusha	Mithila	3	Lalvitti	5.10	4.20	21.42	21.42	1	Tile roof, bamboo/ mud wall,mud floor cattle shed	2072	Residence	8,800.00	188,496.00		New identified from RoW
30	LS	21.90	30-RM-3-N	253+900	Dhanusha	Mithila	3	Lalvitti	6.30	3.10	19.53	19.53	1	Tile roof ,mud +wooden wall ,mud floor (kitchen)	2073	Kitchen	8,800.00	171,864.00		New identified from RoW
31	LS	15.30	31-RM-3-N	253+960	Dhanusha	Mithila	3	Lalvitti	4.60	4.20	19.32	19.32	1	Tile roof ,mud +wooden wall ,mud floor	2074	Chhapro	8,800.00	170,016.00		New identified from RoW
32	LS	22.30	32-AT-5-N	254+200	Dhanusha	Mithila	5	Shripur	7.40	2.30	17.02	17.02	1	Tile roof ,mud +bamboowall ,mud floor (kitchen)	2072	Residence	8,800.00	149,776.00		New identified from RoW
33	LS	20.50	33-ST-5-N	255+240	Dhanusha	Mithila	5	Shripur	5.80	4.20	24.36	24.36	1	Tile roof, bamboo/ mud wall,mud floor cattle shed	2074	Residence	8,800.00	214,368.00		New identified from RoW
34	LS	15.90	34-FM-5-N	256+105	Dhanusha	Mithila	5	Near basai pul	6.00	3.80	22.80	22.80	1	Roof CGI sheet + CGI +bamboo wall & mud (tea shop)	2075	Business	9,900.00	225,720.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
35	LS	23.85	35-KL-6-N	256+740	Dhanusha	Mithila	6	Dhalkebar	4.20	1.15	4.83	4.83	1	CGI roof+ wooden and bamboo wall and floor mud house	2072	Residence	9,900.00	47,817.00		New identified from RoW
36	RS	24.10	36-RD-6-N	257+142	Dhanusha	Mithila	6	Dhalkebar	3.20	0.90	2.88	2.88	1	Rcc House Brick Cement wall Pcc floor	2062	Business	24,200.00	69,696.00		New identified from RoW
37	RS	18.20	37-RS-6-N	257+184	Dhanusha	Mithila	6	Dhalkebar	6.80	5.30	36.04	36.04	2	Rcc House Brick Cement wall Pcc floor	2065	Residence/ Business	24,200.00	1,744,336.00		New identified from RoW
38	RS	19.00	38-MD-6-N	257+189	Dhanusha	Mithila	6	Dhalkebar	6.00	4.10	24.60	24.60	3	Rcc House Brick Cement wall Pcc floor	2065	Residence/ Business	24,200.00	1,785,960.00		New identified from RoW
39	RS	20.25	39-BY-6-N	257+194	Dhanusha	Mithila	6	Dhalkebar	4.75	3.30	15.68	15.68	1	roof asbestos + wood brick cement wall + floor pcc	2065	Business	16,500.00	258,637.50		New identified from RoW
40	RS	20.25	40-AY-6-N	257+197	Dhanusha	Mithila	6	Dhalkebar	4.75	3.10	14.73	14.73	1	roof asbestos + wood brick cement wall + floor pcc	2065	Business	16,500.00	242,962.50		New identified from RoW
41	RS	20.25	41-LY-6-N	257+199	Dhanusha	Mithila	6	Dhalkebar	6.85	4.75	32.54	32.54	1	CGI roof + wood brick cement wall + floor pcc	2068	Business	16,500.00	536,868.75		New identified from RoW

42	LS	22.80	42-LT-6-N	257+394	Dhanusha	Mithila	6	Dhalkebar	3.50	2.20	7.70	7.70	1	Roof brick+wood brick cement wall,RBC, floor pcc	2068	Business	16,500.00	127,050.00		New identified from RoW
43	RS	23.65	43-RM-6-N	257+450	Dhanusha	Mithila	6	Dhalkebar	11.50	1.35	15.53	15.53	4	Rcc House Brick Cement wall Pcc floor	2062	Residence/ Business	24,200.00	1,502,820.00		New identified from RoW
44	RS	23.00	44-PIL-7-N	257+853	Dhanusha	Mithila	7	Dhalkebar	5.30	2.00	10.60	10.60	1	CGI sheet+wood Brick cement wall floor cement		Business	16,500.00	174,900.00		New identified from RoW
45	RS	23.00	45-RS-7-N	257+853	Dhanusha	Mithila	7	Dhalkebar	5.30	2.00	10.60	10.60	1	CGI sheet+wood Brick cement wall		Business	16,500.00	174,900.00		New identified from RoW
46	LS	22.00	46-LL-7-N	257+857	Dhanusha	Mithila	7	Dhalkebar	1.75	2.00	3.50	3.50	1	CGI sheet+wood Brick cement wall floor cement		Business	16,500.00	57,750.00		New identified from RoW
47	RS		47-BS-7-N	258+190	Dhanusha	Mithila	7	Dhalkebar	4.20	4.00	16.80	16.80	1	Temporary Taharo CGI roof and mud mortar wall	2074	Chhapro	9,900.00	166,320.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
48	RS	21.70	48-US-7-N	258+180	Dhanusha	Mithila	7	Dhalkebar	7.90	5.20	41.08	41.08	1	Roof Tile+bambo wall Mud Floor Kitchen	2070	Residence	8,800.00	361,504.00		New identified from RoW
49	RS	17.70	49-SK-7-N	258+610	Dhanusha	Mithila	7	Dhalkebar	4.20	4.50	18.90	18.90	1	CGI sheet roof bamboomud wall Mud floor Kitchen	2070	Residence	9,900.00	187,110.00		New identified from RoW
50	RS	15.35	50-SD-7-N	258+620	Dhanusha	Mithila	7	Dhalkebar	3.40	4.20	14.28	14.28	1	Tile roof bamboomud wall Mud floor Kitchen	2070	Residence	8,800.00	125,664.00		New identified from RoW
51	LS	23	51-NA-8-N	258+950	Dhanusha	Mithila	8	Dhalkebar	5.20	2.00	10.40	10.40	1	Rcc Piller with Brick wall Houlse	2072	Residence	16,500.00	171,600.00		New identified from RoW
									2.60	2.60	6.76	6.76	1	Tile roof brick wall floor cemente		Residence	8,800.00	59,488.00		New identified from RoW
52	RS	21.30	52-HB-8-N	259+110	Dhanusha	Mithila	8	Dhalkebar	8.50	3.70	31.45	31.45	1	tile roof bamboo+mud wall mud floor	2075	Residence	8,800.00	276,760.00		New identified from RoW
82	Total																			

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex 1: 1.2 Project Affected Private Households Lot-2

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road
Projected Affected Private Structures, Badahari Bridge to Phuljor Section (Lot-2, 260+100 to 289+840, 29.740km)

SN	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Constructio n Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure (NRs.)	Photo	Remarks
						Municipality	Ward	Location			Total Affected Area	Affected Area								
Project Affected Household from Original RAP																				
1	RS	18.5	1-DK-5-OR	271+305	Mahottari	Bardibas	5	Gaushala	9.80	4.40	43.12	43.12	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Residence	8,800.00	379,456.00		Original RAP
2	RS	17.4	2-RC-5-OR	271+340	Mahottari	Bardibas	5	Gaushala	10.50	4.30	45.15	45.15	1	Wood and bamboo pillar / Bamboo wall with mud mortar and Hay and Tarpaulin sheet roof	2059	Business/ Residence	5,500.00	248,325.00		Original RAP
3	RS	9.2	3-SM-5-OR	275+270	Mahottari	Bardibas	5	Tuteshwor	8.60	4.50	38.70	38.70	1	Wooden pillar / Bamboo wall with mud mortar and Concrete tile roof	2049	Business/ Residence	8,800.00	340,560.00		Original RAP
									3.30	3.20	10.56	10.56	1	Wooden pillar / No wall and Concrete tile roof			5,866.67	61,952.00		Original RAP
4	RS	18	4-MM-5-OR	275+290	Mahottari	Bardibas	5	Tuteshwor	8.70	5.70	99.18	99.18	2	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2052	Business/ Residence	8,800.00	1,745,568.00		Original RAP
5	RS	6	5-SM-5-OR	275+285	Mahottari	Bardibas	5	Tuteshwor	5.40	3.70	19.98	19.98	1	Wodden pillar / Gabion mess wall and Concrete tile roof	2074	Business/ Residence	8,800.00	175,824.00		Original RAP
6	RS	9.1	6-PS-10-OR	279+910	Mahottari	Bardibas	10	Laxmaniya	5.30	4.20	22.26	22.26	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Business/ Residence	8,800.00	195,888.00		Original RAP
									11.70	5.20	60.84	60.84	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof			8,800.00	535,392.00		Original RAP
7	RS	8.6	7-SG-10-OR	279+935	Mahottari	Bardibas	10	Laxmaniya	16.20	6.40	103.68	103.68	1	Wooden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Business/ Residence	8,800.00	912,384.00		Original RAP
									10.50	6.70	70.35	70.35	1	Wooden pillar / No wall and Concrete tile roof			5,866.67	412,720.00		Original RAP
8	L.S.	9.5	8-YS-11-OR	279+945	Mahottari	Gaushala	11	Laxmaniya	13.70	6.90	94.53	94.53	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2046	Business/ Residence	8,800.00	831,864.00		Original RAP

9	LS	18	9-AT-11-OR	279+930	Mahottari	Gaushala	11	Laxmaniya	9.70	4.40	42.68	42.68	1	Wodden pillar / Bamboo wall with mud mortar and CGI sheet roof	2039	Residence	9,900.00	422,532.00		Original RAP
10	LS	9.1	10-AB-11-OR	271+381	Mahottari	Gaushala	11	Laxmaniya	6.00	4.30	25.80	25.80	1	Wodden pillar/ Bamboo wall and Concrete tile roof	2078	Business/ Residence	8,800.00	227,040.00		Original RAP
									7.40	4.30	31.82	31.82	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof		Partial	8,800.00	280,016.00		Original RAP
11	LS	23.4	11-SB-11-OR	279+965	Mahottari	Gaushala	11	Laxmaniya	8.70	6.00	52.20	52.20	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2077	Residence	8,800.00	459,360.00		Original RAP
									5.70	3.50	19.95	19.95	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof		Partial	8,800.00	175,560.00		Original RAP
12	LS	17	12-KL-13-OR	283+195	Sarlahi	Ishworpur	13		10.20	3.50	35.70	35.70	1	Wodden pillar/ Bamboo wall Bamboo wall with mud mortar and Concrete tile roof		Residence	8,800.00	314,160.00		Original RAP
									9.50	4.00	38.00	38.00	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2057	Residence	8,800.00	334,400.00		Original RAP

Project Affected Households from Extended part temporary structures of Original RAP

1	RS	20	1-SK-10-ET	263+775	Dhanusha	Mithila	10	Lalgadh	4.8	3.9	18.72	18.72	1	Wooden poles, Cemented tile roof, Mud mortar house	2047	Residence	8,800.00	164,736.00		From Extended
									2.8	2.3	6.44	6.44	1	Movable Structure		Business		-		From Extended
									1.9	1.6	3.04	3.04	1	Movable Structure		Business		-		From Extended
2	LS	16.75	2-RS-10-ET	264+880	Dhanusha	Mithila	10	Lalgadh	10.6	6.5	68.90	68.90	1	Wooden pillar, Bamboo Wall and Cemented tile roof	2078	Residence/ Business	8,800.00	606,320.00		From Extended
3	RS	21.5	3-TS-10-ET	264+895	Dhanusha	Mithila	10	Lalgadh	4.1	3.5	14.35	14.35	1	Brick cement mortar wall andalbester sheet roof	2066	Business	9,900.00	142,065.00		From Extended

4	RS	22	4-KB-10-ET	263+770	Dhanusha	Mithila	10	Lalgadh	10.5	3	31.50	31.50	1	Bamboo house Zink sheet roof	2045	Residence	8,800.00	277,200.00		From Extended
5	LS	23.4	5-N-11-ET	279+980	Mahottari	Gaushala	11	Laxmuniya	7	4.7	32.9	32.9	1	Wooden pillar, bamboo sheet, Zink sheet roof		Residence	9,900.00	325,710.00		From Extended
6	LS	14	6-P-11-ET	271+305	Mahottari	Gaushala	11	Laxmuniya	6.20	3.90	24.18	24.18	1	Tile CGI roof open wall	2076	Residence	9,900.00	239,382.00		From Extended
7	LS	17	7-KR-11-ET	279+985	Mahottari	Gaushala	11	Laxmuniya	6.2	4.2	26.04	26.04	1	Wooden pillar, bamboo sheet, Zink sheet roof		Residence	8,800.00	229,152.00		From Extended
8	LS	18	8-KB-13-ET	283+165	Sarlahi	Ishworpur	13	Bankhe Chowk	6.5	5.2	33.8	33.8	1	Wooden Pillar, bamboo sheet, cemented tali roof		Residence/ Business	9,900.00	334,620.00		From Extended
									4	3	12	12	1	Wooden Pillar, no walls, tarpaulin sheet roof		Tahara	2,750.00	33,000.00		From Extended

Newly identified Project Affected Households of Row

1	RS	12.80	1-BS-9-N	261+020	Dhanusha	Mithila	9	Badahari	3.40	7.30	24.82	24.82	1	ms post with CGI roof with open wall		Business	9,900.00	245,718.00		New identified from RoW
2	RS	16.00	2-RT-9-N	261+025	Dhanusha	Mithila	9	Badahari	4.60	3.70	17.02	17.02	1	ms post with CGI roof with open wall		Business	9,900.00	168,498.00		New identified from RoW
3	RS	17.5	3-GS-9-N	261+070	Dhanusha	Mithila	9	Badahari	5	3.6	18.00	18.00	1	Asbestoss roof+wood brick cement wall	2059	Residence /Business	13,200.00	237,600.00		New identified from RoW
4	RS	11	4-SM-9-N	261+080	Dhanusha	Mithila	9	Badahari	9.7	4.3	41.71	41.71	1	RCC Pillar, Brick wall Zink sheet roof and 3 Shutters	2061	Residence/ Business	16,500.00	688,215.00		New identified from RoW

5	RS	11	5-DM-9-N	261+100	Dhanusha	Mithila	9	Badahari	12.4	2.6	32.24	32.24	1	Rcc Pillar, Brick wall, Zink sheet roof and Shutters	2060	Residence/ Business	16,500.00	531,960.00		New identified from RoW
6	LS	22.7	6-SS-9-N	261+800	Dhanusha	Mithila	9	Badahari	3.4	2.85	9.69	9.69	1	Wooden poles , khar covered roof and wall	2079	Residence	5,500.00	53,295.00		New identified from RoW
7	LS	23	7-HT-9-N	261+940	Dhanusha	Mithila	9	Badahari	12.7	2	25.40	25.40	1	Wooden pillar, Bamboo Wall and Cemented tile roof	2078	Residence/ Business	8,800.00	223,520.00		New identified from RoW
8	LS	20	8-PS-9-N	261+960	Dhanusha	Mithila	9	Badahari	6.4	4.6	29.44	29.44	1	Temporary Tahra	2079		2,750.00	80,960.00		New identified from RoW
9	RS	17	9-DK-5-N	271+310	Mahottari	Bardibas	5	Gaushala Chowk			30	30	1	Wooden Pillar, Bamboo sheet, hay roof		Residence	8,800.00	264,000.00		New identified from RoW
10	LS	18	10-AG-11-N	271+309	Mahottari	Gaushala	11	Laxmuniya	6.30	4.20	26.46	26.46	1	Tile roof wood Piller bamboo mud mortar	2076	Residence	9,900.00	261,954.00		New identified from RoW
11	RS	11	11-DG-10-N	279+285	Mahottari	Bardibas	10	Banpath/Khayarmara	7.00	4.80	33.60	33.60	1	Tile Roof wood Piller bamboo wall	2060	Business	8,800.00	295,680.00		New identified from RoW
12	RS	11	12-ST-9-N	261+85	Dhanusha	Mithila	9	Badahari			12	12	1	Zink sheet roof and shutter		Residence/ Business	18,392.00	220,704.00		New identified from RoW

32 Total

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex 1: 1.3 Project Affected Private Households Lot-3

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road
Projected Affected Private Structures, Phuljor to Bagmati (East Canal) Section (Lot-3, 289+840 to 312 + 785, 22.945km)

S. N	Side	Distance from C.L. (m)	Unique ID	Chainage	District	Address			Area (Sq m)			Stories	Type of structures	Present usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
						Municipality	Ward	Location	Length	Breadth	Total Affected Area							
Project Affected Household from Original RAP																		
1	RS	16.50	1-ST-5-OR	290+150	Sarlahi	Ishworpur	5	Phuljor	3.30	4.50	14.85	1	Bamboo stick wall and CGI sheet roof.	Business Shop (Tea/Snack)	5,500.00	81,675.00		Original RAP
		23.90							6.25	1.10	6.88	1	Covered with CGI sheet with CGI roof	Residence	5,500.00	37,840.00		
2	LS	14.50	2-LS-4-OR	300+700	Sarlahi	Hariwon	4	Tinghhare Tole	6.20	4.80	29.76	1	Brick with mud wall and Cemented tile roof.	Residence + toilet	13,552.00	403,307.52		Original RAP
3	RS	21.20	3-SM-11-OR	303+700	Sarlahi	Hariwon	11	Shruti Bikas	6.50	3.80	24.70	1	Wooden pole bamboo strip with mud wall CGI roof	Residence + Toilet	8,800.00	217,360.00		Original RAP
4	L.S.	13.10	4-JB-1-OR	308+500	Sarlahi	Bagmati	1	Panitanki	3.70	5.20	19.24	1	Wooden pillar with bamboo strip with mud wall and tile roof	Business Shop/ Residence	8,800.00	169,312.00		Original RAP
5	LS	21.00	5-NM-12-OR	312+800	Sarlahi	Bagmati	12	Karmaiya	4.00	5.00	20.00	2	Brick plastered wall and cemented tile roof.	Residence/shop (vegetable)	13,552.00	542,080.00		Original RAP
6	LS	19.00	6-ST-12-OR	312+ 900	Sarlahi	Bagmati	12	Karmaiya	8.00	5.00	40.00	1	Bamboo strip with mud wall and Cemented tile roofing.	Residence	9,900.00	396,000.00		Original RAP

Project Affected Households from Extended part temporary structures of Original RAP

1	RS	20.30	1-BD-5-ET	290+005	Sarlahi	Ishworpur	5	Ishworpur	4.70	5.80	27.26	1	Wall covered with Zink sheet and roof covered with tile and Zink sheet.	business	8,800.00	239,888.00		From Extended
2	LS	9.40	2-LM-5-ET	290+120	Sarlahi	Ishworpur	5	Ishworpur	5.89	2.50	14.73	1	Bamboo strip covering with mud and cement tile roof	Business	5,500.00	80,987.50		From Extended
3	RS	20.30 M	3-DLM-5-ET	290+050	Sarlahi		5	Phuljor	4.70	4.30	20.21	1	Bamboo stick covered with mud and Cemented tile roof.	Business	5,500.00	111,155.00		From Extended
4	LS		4-GB-5-ET	290+075	Sarlahi	Ishworpur	5	Ishworpur	2.60	3.50	9.10	1	Jasta Covering roof	Tea Shop	8,800.00	80,080.00		From Extended
5	RS	22.70 M	5-SA-5-ET	290+550	Sarlahi	Ishworpur	5	Ishworpur	6.30	2.30	14.49	1	RCC pillar, brick wall and zink roof.	Tyre workshop	13552.00	196,368.48		From Extended
6	RS	20.30	6-IBS-10-ET	290+150	Sarlahi	Ishworpur	10	Phuljor	5.50	3.80	20.90	1	Wooden pole, bamboo strip with mud wall and cemented tile roof	Residence-Full affected	8,800.00	183,920.00		From Extended
7	LS	11.00	7-BB-5-ET	290+025	Sarlahi	Ishworpur	5	Ishworpur	3.50	5.10	17.85	1	Wooden pole, bamboo strip wall and Tarpaulin roof	Tea/snack Shop	2,750.00	49,087.50		From Extended
8	LS	20 M	8-LBT-17-ET	209+600	Sarlahi	Lalbandi	17	Lalbandi	5.70	4.00	22.80	1	wodden pole bamboo strip wall and cement tile roof	Kitchen	5,500.00	125,400.00		From Extended

9	RS	22.80 M	9-RKS-7-ET		Sarlahi	Lalbandi	7	lalbandi	2.40	3.60	8.64	1	Bamboo strip wall and zink roof. (Tea/snack shop)	Khaja ghar	9900.00	85,536.00		From Extended
10	RS	23.0 M	10-SM-7-ET		Sarlahi	Lalbandi	7	lalbandi	2.00	7.40	14.80	1	Bamboo strip wall and zink roof. (Local Hotels/tea, snack shop, 2 nos)	Hotel Khaja Ghar	9900.00	146,520.00		From Extended
11	RS	24.05	11-BT-9-ET	295+750	Sarlahi	Lalbandi	9	Lalbandi	4.94	0.95	4.69	1	Brick Plastered wall with Cemented tile roof.	Residence-Partially Front part	14,762.00	69,278.07		From Extended
		23.05							1.90	5.10	9.69	1	Bamboo strip with mud wall and CGI roof.	Kithchen-Full affected	5,500.00	53,295.00		From Extended
12	LS	17.00	12-CL-4-ET	301+285	Sarlahi	Hariwon	4	ganesh chock	2.50	4.40	11.00	1	Brick with mud wall and zink roof	Shop	[illegible]	129,107.00		From Extended
13	LS	21.00	13-RC-4-ET	301+475	Sarlahi	Hariwon	4	Sasapur	3.40	3.70	12.58	1	Brick wall and Cemented tile roof.	Store +Total	[illegible]	170,484.16		From Extended
		18.40							5.00	4.70	23.50	1	brick wall and tile roof	shed	[illegible]	318,472.00		From Extended
		20.00							6.00	7.00	42.00	1	bambo	rice mill	5,500.00	231,000.00		From Extended
14	LS	16.50	14-BL-4-ET	301+500	Sarlahi	Hariwon	4	Sasapur	5.60	3.30	18.48	1	Bamboo strip with mud wall and cemented tile covering roof.	Shed	8,800.00	162,624.00		From Extended
15	LS	13.30	15-SG-4-ET	303+600	Sarlahi	Hariwon	4	Hariwan	4.25	6.25	26.56	1	Rcc Bulding with Zinc pali	Business	5,500.00	146,093.75		From Extended
16	RS	20.50	16-JM-11-ET	303+700	Sarlahi	Hariwon	11	Harion	4.00	3.30	13.20	1	Bamboo strip with mud wall and CGI roof.	Residence-Full affected	5,500.00	72,600.00		From Extended

17	RS	24.50	17-RD-11-ET	303+600	Sarlahi	Hariwon	11	Harion	4.25	4.00	17.00	1	Cemented wall with zinc roof.	Residence	5,500.00	93,500.00		From Extended
18	LS	20.40	18-KB-11-ET	303+600	Sarlahi	Hariwon	11	kadariya cwhok	3.90	4.80	18.72	1	Work Shop brick wall and jasta	Tahara	[illegible]	253,693.44		From Extended
19	LS	22.10	19-RS-11-ET	304+100	Sarlahi	Hariwon	11	Harion	8.90	3.60	32.04	2	Brick plastered/painted wall with tile roof.	Residence-Full affected	14,762.00	945,948.96		From Extended
									1.00	1.30	1.30	1	RCC toilet	Toilet-Full affected	24,200.00	24,200.00		From Extended
20	L.S.	23.90	20-PS-10-ET	306+100	Sarlahi	Hariwon	10	Harion	5.10	1.10	5.61	2	Wooden frame with CGI roof	Residence-Bardali of the home) Extended part of the home	8,800.00	98,736.00		From Extended
21	L.S.	22.00	21-GR-1-ET	309+300	Sarlahi	Bagmati	1	Bagmati	10.20	2.40	24.48	2	Cemented Plastered wall and RCC roof	Residence-Partially	17,182.00	841,230.72		From Extended
		16.40							6.30	5.20	32.76	1	Block masonry wall and Tali roof	Welding shop-Full affected	13,552.00	443,963.52		From Extended
22	LS	13.00	22-RS-4-ET	311+350	Sarlahi	Bagmati	4	Bagmati	1.70	2.00	3.40	1	Brick plaster wall and tile roof	business	[illegible]	33,660.00		From Extended
									2.60	3.55	9.23	1		business	[illegible]	91,377.00		From Extended
23	RS	22.00	23-LT-11-ET	311+100	Sarlahi	Bagmati	11	Bagmati	14.00	3.20	44.80	1	Cement plastered wall and Cement tile roof.	Residence-Full affected (Due to old home)	13,552.00	607,129.60		From Extended
		13.50							5.00	10.00	50.00	1	Wood pole bamboo strip wall and cemented tyle roof	Shed-Full affected	8,800.00	440,000.00		From Extended
24	RS	21.80	24-GB-11-ET	312+400	Sarlahi	Bagmati	11	Bagmati	4.60	3.00	13.80	1	Cement plastered wall and cemented tile roofing.	Residence-Partially	14,762.00	203,715.60		From Extended
									4.60	0.50	2.30	2			14,762.00	67,905.20		From Extended
25	LS	18.00	25-RT-12-ET	312+800	Sarlahi	Bagmati	12	Bagmati	7.60	4.00	30.40	1	Block wall and cemented tile roof.iron gate	Business structure-Fully	14,762.00	448,764.80		From Extended

Newly identified Project Affected Households of Row																	
1	RS	23.70	1-DL-9-N	290+150	Sarlahi	Ishworpur	9	Phuljor	6.70	0.25	1.68	1	Cemented plastered wall and CGI covered roof	Residence-Partially	9,900.00	16,582.50		New identified from RoW
2	RS	22.50	2-YC-5-N	290+100	Sarlahi		5	Lalbandi	8.30	4.15	34.45	1	Bamboo stick covered with mud and Cemented tile roof.	Tea shop	5,500.00	189,447.50		New identified from RoW
3	RS	20.20	3-SG-5-N	290+020	Sarlahi	Ishworpur	5	Ishworpur	4.50	4.80	21.60	1	Wooden pillar with CGI sheet roof	Business	5,500.00	118,800.00		New identified from RoW
4	RS	22.10 M	4-RM-5-N	290+50	Sarlahi	Ishworpur	5	Ishworpur	4.40	2.20	9.68	1	Cemented pole bamboo stick with mud wall and cemented tile roofing.	Workshop	8,800.00	85,184.00		New identified from RoW
5	RS	20.20 M	5-BT-17-N	209+600	Sarlahi	Lalbandi	17	Ranigunj	3.80	3.80	14.44	1	Wodden pole, plastic covered wall and CGI roof	Goth	5,500.00	79,420.00		New identified from RoW
6	LS	23.70	6-KP-17-N	291+200	Sarlahi	Lalbandi	17	Ranigunj	9.60	1.50	14.40	1	RCC pillar system, cement plaster wall and concrete roof	Residence-PartiallyBaranda and room	18,392.00	264,844.80		New identified from RoW
												1	Toilet with Septic Tank		24,200.00	24,200.00		New identified from RoW
7	RS	20.20 M	7-HB-17-N	209+300	Sarlahi	Lalbandi	17	Ranigunj	8.10	4.30	34.83	1	Wooden pole, plastic covered wall and CGI roof	Kitchen	5,500.00	191,565.00		New identified from RoW
8	RS	23.80	8-DA-6-N	293+900	Sarlahi	Lalbandi	6	Lalbandi	1.50	6.10	9.15	2	Plastered wall and Cement tile roof	Residence-fully affected	13,552.00	248,001.60		New identified from RoW
9	RS	19.60 M	9-CG-6-N	293+750	Sarlahi	Lalbandi	6	Lalbandi	5.40	3.30	17.82	1	wodden pole bamboo strip wall and cement tile roof	not used	5,500.00	98,010.00		New identified from RoW
10	LS	22.50	10-SS-6-N	293+752	Sarlahi	Lalbandi	6	lalbandi	13.26	3.55	47.07	1	Brick wall and Cemented Zinc roof.	house	11,700.00	552,495.80		New identified from RoW
11	LS	24.00	11-PT-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	5.70	0.90	5.13	2	Brick wall and RCC roof. Old home	Shop/Residence -partially	15,972.00	163,872.72		New identified from RoW

12	RS	23.10	12-LS-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	9.00	1.00	9.00	1.5	Brick wall plastered RCC building, Old home	Residence/ Business) (potato, onion store)-Partially Front part of home	15,972.00	143,748.00		New identified from RoW
13	RS	22.50	13-SL-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	16.00	1.50	24.00	2.5	RCC Pillar system and plastered wall building	Residence/ hardware business-partially	18,392.00	882,816.00		New identified from RoW
14	RS	23.00	14-HL-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	7.90	1.90	15.01	1	Baranda in ground floor and room in up stair of brick wall plastered home	Residence/shop and hotel-partially- Room and varanda	15,972.00	239,739.72		New identified from RoW
15	LS	22.00	15-RS-7-N	295+000	Sarlahi	Lalbandi	7	Lalbandi	6.00	3.00	18.00	2	RCC pillar system concrete roofing.	Business, Residence	18,392.00	662,112.00		New identified from RoW
16	LS	22.50	16-MS-7-N		Sarlahi	Lalbandi	7	lalbandi	3.40	1.50	5.10	1	RCC pillar system concrete roofing.	Business	[illegible]	93,799.20		New identified from RoW
17	LS	21.70	17-RS-7-N	295+000	Sarlahi	Lalbandi	7	Lalbandi	7.50	3.30	24.75	2	Jhingati roofing old home (old type of structure)	Sweet shop	8,800.00	435,600.00		New identified from RoW
18	LS	22.00	18-SL-7-N	295+100	Sarlahi	Lalbandi	7	Lalbandi	10.60	4.50	47.70	2.5	RCC frame structure	Business, Residence	18,392.00	1,754,596.80		New identified from RoW
19	LS	24.00	19-SK-7-N		Sarlahi	Lalbandi	7	lalbandi	5.30	1.20	6.36	3	RCC pillar system concrete roofing.	Business/ residence	[illegible]	350,919.36		New identified from RoW
20	LS	24.20	20-r-7-N		Sarlahi	Lalbandi	7	lalbandi	5.25	1.30	6.83	3	RCC pillar system concrete roofing.	business/ residence	[illegible]	376,576.20		New identified from RoW
21	LS	23.50	21-LK-7-N		Sarlahi	Lalbandi	7	lalbandi	4.30	2.30	9.89	1	RCC pillar system concrete roofing.	Business/ residence	[illegible]	169,929.98		New identified from RoW
22	RS	22.70	22-RB-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	4.55	1.30	5.92	2	Baranda in ground floor and room in up stair of brick wall plastered home	Residence/Business (hotel)-partially-Room and varanda	15,972.00	188,948.76		New identified from RoW

23	RS	23.20 M	23-MS-7-N		Sarlahi	Lalbandi	7	lalbandi	1.80	6.60	11.88	1	Iron poles zink covered wall and zink roof	Hotel	14300.00	169,884.00		New identified from RoW
24	RS	23.40 M	24-RS-7-N		Sarlahi	Lalbandi	7	lalbandi	1.60	9.00	14.40	1	Block wall with cement plastered and zink roof.	Shop/ Meat shop	14300.00	205,920.00		New identified from RoW
25	RS	24.0 M	25-BP-7-N		Sarlahi	Lalbandi	7	lalbandi	1.00	5.50	5.50	1	Block wall with cement plastered and zink roof.	Kajal Furniture Udyog	14300.00	78,650.00		New identified from RoW
26	RS	23.0 M	26-BT-7-N		Sarlahi	Lalbandi	7	lalbandi	2.30	3.15	7.25	1	Zink wall and zink roof. (meat shop)	Meat shop	13200.00	95,634.00		New identified from RoW
27	RS	23.50	27-SB-9-N	295+550	Sarlahi	Lalbandi	9	Lalbandi	8.90	1.00	8.90	1	RCC pillar plastered wall and concrete roof.	Residence-One RCC pillar, top and baranda Partially	18,392.00	163,688.80		New identified from RoW
28	RS	21.00	28-BB-9-N	295+500	Sarlahi	Lalbandi	9	Lalbandi	2.70	4.50	12.15	1	Bamboo strip and mud wall and cemented tyle roof.	Shed-Full Affected	2,750.00	33,412.50		New identified from RoW
29	RS	24.00	29-RM-4-N		Sarlahi	Hariwon	4	ganesh chock	1.68	1.68	2.82	1	Brick wall plaster with concrete roof.	Toilet	17600.00	17,600.00		New identified from RoW
30	LS	19.50	30-KR-4-N	301+800	Sarlahi	Hariwon	4	Sasapur	2.70	5.50	14.85	1	Brick wall and Cemented tile roof.	Store	[illegible]	201,247.20		New identified from RoW
31	LS	18.00	31-GB-11-N	303+200	Sarlahi	Hariwon	11	Shruti Bikas	8.05	0.70	5.64	1	Brick wall Zinc sheet roof	Businees	5,500.00	30,992.50		New identified from RoW
32	RS	22.20	32-MM-11-N	303+500	Sarlahi	Hariwon	11	Harion	5.00	2.80	14.00	1	Wooden pole bamboo strip mud roof with hey roof	Business	5,500.00	77,000.00		New identified from RoW
33	RS	24.00	33-LP-11-N	303+700	Sarlahi	Hariwon	11	Harion	5.00	1.00	5.00	1	Bamboo strip with mud wall and CGI roof.	Residence-Partially	5,500.00	27,500.00		New identified from RoW
									1.50	1.50	2.25	1	CGI cover wall and CGI cover roof	Toilet-Full affected	17,600.00	17,600.00		New identified from RoW
34	RS	23.30	34-DB-11-N	303+700	Sarlahi	Hariwon	11	Harion	8.50	1.70	14.45	1	Cemented wall with zinc roof.	Residence	5,500.00	79,475.00		New identified from RoW

35	RS	24.00	35-YR-11-N	303+700	Sarlahi	Hariwon	11	Harion	3.00	1.00	3.00	1	Wooden wall and Cemented tile roof.	Residence-Partially	8,800.00	26,400.00		New identified from RoW
36	LS	20.30	36-PP-11-N	303+550	Sarlahi	Hariwon	11	kadariya cwhok	3.00	2.80	8.40	1	Cemented palaster wall GI sheet roof	Hair cutting	[illegible]	113,836.80		New identified from RoW
37	L.S.	23.70	37-CD-11-N	304+700	Sarlahi	Hariwon	9	Harion	10.50	0.50	5.25	1	1st row of column and Varanda portion of Building	Residence-Top portion only	15,972.00	83,853.00		New identified from RoW
38	R.S.	20.20	38-LP-11-N	306+200	Sarlahi	hariwon	9	Nayaroad	1.80	1.50	2.70	1	Brick wall of bathroom	Toilet	17600	17,600.00		New identified from RoW
39	R.S.	23.00	39-GP-11-N	306+250	Sarlahi	Hariwon	9	Nayaroad	1.10	0.95	1.05	1	brick wall and tali roof	Toilet	17600	17,600.00		New identified from RoW
40	L.S.	22.50	40-RG-11-N	307+000	Sarlahi	Hariwon	10	Harion	5.50	2.20	12.10	1	Cement plaster wall and CGI roof	Hotel/Residence -Partially-Extended part	13,552.00	163,979.20		New identified from RoW
41	R.S.	23.00	41-PK-22-N	307+120	Sarlahi	Hariwon	9	Harion	8.60	1.00	8.60	2	Front portion of the RCC building	Residence/shop-Partially	15,972.00	274,718.40		New identified from RoW
42	R.S.	23.20	42-RS-22-N	307+150	Sarlahi	Hariwon	9	Harion	12.75	0.80	10.20	2	Front portion of RCC building	Residence/shop-Partially	18,392.00	375,196.80		New identified from RoW
43	R.S.	23.00	43-BK-22-N	307+100	Sarlahi	Hariwon	9	Harion	6.20	1.40	8.68	2	Wooden and cemented wall and CGI sheet roofing (old home)	Residence/ tea shop-Partially	14,772.00	256,441.92		New identified from RoW
44	R.S.	24.20	44-NKC-22-N	307+050	Sarlahi	Hariwon	9	Harion	11.20	0.50	5.60	2	Cemented wall and tyle roofing (old home)	Residence-Partially	13,552.00	151,782.40		New identified from RoW
45	R.S.	24.10	45-BK-33-N	307+050	Sarlahi	Hariwon	9	Harion	1.00	9.80	9.80	3	Building of column and varada of RCC home	Residence/ shop-Partially Column and varanda	18,392.00	540,724.80		New identified from RoW
46	R.S.	23.60	46-LU-22-N	307+050	Sarlahi	Hariwon	9	Harion	7.60	0.30	2.28	2	Building of the column and varanda	Residence/shop-Partially- Column and varanda	18,392.00	83,867.52		New identified from RoW
47	L.S.	23.70	47-SR-22-N	307+050	Sarlahi	Hariwon	10	Harion	3.40	1.30	4.42	2	Front portion of RCC buiing	Residence/shop, Partially Column and varanda	18,392.00	162,585.28		New identified from RoW
48	L.S.	24.10	48-AC-1.51.5-N	307+050	Sarlahi	Hariwon	10	Harion	8.30	0.90	7.47	1.5	First row of column with varanda portion. RCC building	Residence/shop-Partially Column and varanda	18,392.00	137,388.24		New identified from RoW

49	L.S.	23.90	49-BP-22-N	307+050	Sarlahi	Hariwon	10	Harion	5.40	1.10	5.94	2	Wooden wall 2 stories house with red tile roofing. (Old home)	Residence/ shop-Partially Column and varandaFull affected (Due to old home)	13,915.00	165,310.20		New identified from RoW
50	R.S.	24.80	50-RS-22-N	307+250	Sarlahi	Hariwon	9	Harion	1.95	6.50	12.68	2	Brick wall with painted and plaster and roof covered with red tiles.	Room of extended part- Full affected	14,762.00	374,216.70		New identified from RoW
51	L.S.	23.30	51-KL-1-N	307+800	Sarlahi	Bagmati	1	Bagmati	6.50	2.00	13.00	2	Wooden and bamboo 2 stories house with cement tile roof.	Residence-Full affected (Due to old home)	13,200.00	343,200.00		New identified from RoW
		15.00										1	Brick wall and cemented tile roof	Toilet-Full affected	24,200.00	24,200.00		New identified from RoW
		18.00							2.00	2.00	4.00	2	Wooden wall with cemented tile roof	Ghumpti .shop-Full affected	8,800.00	70,400.00		New identified from RoW
		19.00							5.00	5.00	25.00	1	Bamboo strip with mud wall and CGI roof.	Goat shed-Full affected	9,900.00	247,500.00		New identified from RoW
52	R.S.	23.50	52-KG-1-N	308+550	Sarlahi	Bagmati	1	Bagmati	3.00	1.50	4.50	1.5	Cement plaster house first floor wooden second floor and tile roof	Residence-Partially, Concrete ladder and Baranda	14,762.00	99,643.50		New identified from RoW

53	RS	22.80	53-GP-1-N	308+112	Sarlahi	Bagmati	1	Bagmati	1.75	1.65	2.89	1	brick walland concrect roof	Toilet	17600	17,600.00		New identified from RoW
54	RS	19.00	54-NP-1-N	308+119	Sarlahi	Bagmati	1	Bagmati	1.20	1.50	1.80	1	cement plaster wall	Toilet	17600	17,600.00		New identified from RoW
		21.10							4.70	3.90	18.33	1	Rcc colum and brick wall with alivestor roof	rice mill	14762	270,587.46		New identified from RoW
55	LS	24.20	55-RT-1-N	309+00	Sarlahi	Bagmati	1	Bagmati	10.80	0.80	8.64	2	Brick plastered wall with concrete roof on 1st floor and wooden wall and CGI sheet roofing on above 2nd floor.	Partially-Old type home	13915	240,451.20		New identified from RoW
56	LS	23.60	56-KK-1-N	310+100	Sarlahi	Bagmati	1	Bagmati	5.40	1.40	7.56	1	Block and wooden wall and tile roof.	Baranda and room of Residence-Partially Column,varanda and room	13,552.00	102,453.12		New identified from RoW
		16.00							5.50	5.00	27.50	1	Wooden pole, bamboo strip and cemented tile roof	Tahara-Full affected	5,500.00	151,250.00		New identified from RoW
		16.50										1	Block wall and tyle roof	Toilet-Full affected	24,200.00	24,200.00		New identified from RoW

57	RS	24.50	57-TK-1-N		Sarlahi	Bagmati	1	Bagmati	1.50	1.60	2.40	1	roof block wall and cement tile roof	toilet	17,600.00	17,600.00		from RoW New identified from RoW
58	LS	15.50	58-RT-4-N	311+100	Sarlahi	Bagmati	4	Bagmati	3.25	5.70	18.53	1	Cemented block wall and cement tile roof	business	13552	251050.8		New identified from RoW
59	LS	24.00	59-SM-12-N	312+000	Sarlahi	Bagmati	12	Bagmati	11.10	1.00	11.10	1	Cement plastered wall and Cement tile roof.	Residence-Full affected	14,762.00	163,858.20		New identified from RoW
		24.00							1.50	1.00	1.50	1	Block wall and CGI roof	Toilet-Full affected	24,200.00	24,200.00		New identified from RoW
60	LS	24.00	60-SM-12-N	312+250	Sarlahi	Bagmati	12	Bagmati	0.60	4.00	2.40	3	Varanda of RCC pillar house	Residence/hotel -Partially	18,392.00	132,422.40		New identified from RoW
61	LS	22.00	61-RK-12-N	312+650	Sarlahi	Bagmati	12	Bagmati	3.50	3.00	10.50	1	Block wall & Zink sheet	busness	[illegible]	142,296.00		New identified from RoW
									11.70	3.00	35.10	1			[illegible]	475,675.20		New identified from RoW
62	LS	24.00	62-RD-12-N	312+900	Sarlahi	Bagmati	12	Bagmati	6.10	1.00	6.10	1	RCC pillar wall and CGI Sheet roofing.	Business structure-Partially	14,762.00	90,048.20		New identified from RoW
63	LS	19.00	63-BD-12-N	312+800	Sarlahi	Bagmati	12	Bagmati	8.00	5.00	40.00	1	Bamboo strip with mud wall and Cemented tile roofing.	Residence	9,900.00	127,600.00		New identified from RoW
									7.00	2.30	16.10	1	Wooden pillar with CGI sheet roof	Business	5,500.00	88,550.00		New identified from RoW
64	LS	10.30	64-BS-12-N	312+801	Sarlahi	Bagmati	12	Bagmati	6.40	3.40	21.76	1	Katghara covered with CGI sheet and toilet	Business	5,500.00	119,680.00		New identified from RoW
65	LS	9.40	65-LS-12-N	312+802	Sarlahi	Bagmati	12	Bagmati	4.40	5.20	22.88	1	CGI sheet roof and wall	Business	5,500.00	125,840.00		New identified from RoW
66	LS	9.20	66-L-12-N	312+803	Sarlahi	Bagmati	12	Bagmati	6.00	6.10	36.60	1	CGI sheet roof and bamboo wall	Business	5,500.00	201,300.00		New identified from RoW
67	LS	9.20	67-L-12-N	312+804	Sarlahi	Bagmati	12	Bagmati	4.40	4.20	18.48	1	CGI sheet roof and bamboo wall	Business	5,500.00	101,640.00		New identified from RoW
68	RS	9.00	68-R-11-N	312+805	Sarlahi	Bagmati	11	Bagmati	7.20	3.00	21.60	1	CGI sheet roof and bamboo wall	Business	5,500.00	118,800.00		New identified from RoW

69	RS	9.00	69-R-11-N	312+806	Sarlahi	Bagmati	11	Bagmati	7.00	3.60	25.20	1	CGI sheet roof and bamboo wall	Business	5,500.00	138,600.00		New identified from RoW
70	LS	9.30	70-PS-12-N	312+807	Sarlahi	Bagmati	12	Bagmati	6.50	4.50	29.25	1	wooden wall Alvester roof	Business	5,500.00	160,875.00		New identified from RoW
71	LS	8.40	71-DK-12-N	312+808	Sarlahi	Bagmati	12	Bagmati	7.90	5.40	42.66	1	CGI Sheet roof and bamboo strip wall	Business	5,500.00	234,630.00		New identified from RoW
72	LS	8.40	72-AL-12-N	312+809	Sarlahi	Bagmati	12	Bagmati	7.90	5.50	43.45	1	Bamboo wall with CGI roof	Business	5,500.00	238,975.00		New identified from RoW
73	LS	9.50	73-L-12-N	312+240	Sarlahi	Bagmati	12	Bagmati	7.00	2.30	16.10	1	Wooden pillar with CGI sheet roof	Business	5,500.00	88,550.00		New identified from RoW
74	LS	20.00	74-DS-12-N	311+450	Sarlahi	Bagmati	11	Bagmati	4.00	4.80	19.20	1	Wooden poles and wall and tile roof	shed	--	190,080.00		New identified from RoW
105	Total																	

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex-1: 1.1 Project Affected Private Households with Identity Lot-1

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road
Projected Affected Private Structures, Kamala Canal to Badahari Bridge Section (Lot-1, 238+030 to 260+100, 22.070km)

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
Projected Affected Households from Original RAP																					
1	LS	6.00	Ram Suneir Devi Paswan [Name Change]	1-RP-8-OR	237+355	Dhanusha	Ganeshman Charnath	8	Portaha	10.10	3.60	36.36	36.36	1	Tile Roof,+Bamboo+mud wall, floor pcc	2075	Business	8,800.00	319,968.00		Original RAP
2	LS	24.00	Bindi Yadav	2-BY-8-OR	238+040	Dhanusha	Ganeshman Charnath	8	Portaha	4.60	3.60	16.56	16.56	1	Mud house (CGI roof)	2075	Business Hut	9,900.00	163,944.00		Original RAP
										4.60	2.50	11.50	11.50	1	Temporary Taharo		Chhapro	2,750.00	31,625.00		
3	RS	10.00	Dhiraj Goutam	3-DG-8-OR	238+040	Dhanusha	Ganeshman Charnath	8	Portaha	2.70	4.00	10.80	10.80	1	Tile roof +tin		Business Hut	9,900.00	106,920.00		Original RAP
4	LS	12.00	Bina Devi Paswan	4-BP-7-OR	238+100	Dhanusha	Ganeshman Charnath	7	Portaha	3.40	3.60	12.24	12.24	1	CGI sheet+Bamboo wall mud floor		Business Hut	9,900.00	121,176.00		Original RAP
5	LS	20.00	Santosh Mahato Koiri	5-SM-7-OR	238+190	Dhanusha	Ganeshman Charnath	7	Portaha	6.60	6.50	42.90	42.90	1	Roof CGI sheet mud+bamboo wall	2078	Residence+ Business	9,900.00	424,710.00		Original RAP
										6.60	2.40	15.84	15.84	1	Temporary Taharo		Taharo	2,750.00	43,560.00		Original RAP
6	RS	24.30	Srimati Minadevi Shah	6-SS-7-OR	239+520	Dhanusha	Ganeshman Charnath	7	Godar	2.15	0.70	1.51	1.51	1	RCC slab with brick wall house with steel staircase	2078	Store /Business	24,200.00	36,421.00		Original RAP
	RS	23.00			239+550							-	1.00	1	TOILET with Septic tank	2078	Toilet	24,200.00	24,200.00		Original RAP
7	RS	23.40	Pappu Purwe Sudi	7-PS-6-OR	239+890	Dhanusha	Ganeshman Charnath	6	Godar	7.35	1.60	11.76	11.76	1	RCC Slab with brick masonry house	2064	Residence	24,200.00	284,592.00		Original RAP
						Dhanusha	Ganeshman Charnath	6	Godar	3.30	1.60	5.28	5.28	1	CGI sheet, brickwork in cement mortar		Residence	16,500.00	87,120.00		Original RAP
8	RS	23.50	Kishor Kumar Shah	8-KS-6-OR	239+910	Dhanusha	Ganeshman Charnath	6	Godar	6.00	1.70	10.20	10.20	1	CGI sheet roof, brick cement wall, floor cemented house	2077	Business Hut	16,500.00	168,300.00		Original RAP
9	RS	19.00	Shanti Devi Haluwai(Dinesh Sah)	9-SH-1-OR	244+240	Dhanusha	Ganeshman Charnath	1	Chaghariya	4.50	4.00	18.00	18.00	1	Roof CGI sheet,mud wall with bamboo, floor mud	2077	Business Hut	9,900.00	178,200.00		Original RAP

10	LS	23.20	Mandira Lama	10-ML-9-OR	246+400	Dhanusha	Dhanusha Dham	9	Bhimnan	2.80	2.80	7.84	7.84	1	Tile roof,brick cement wall, floor cemented	2078	Business Hut	12,100.00	94,864.00		Original RAP
										4.00	2.30	9.20	9.20	1	Temporary Taharo			2,750.00	25,300.00		Original RAP

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
11	LS	16.00	Lakhan Sah Haluwai	11-LH-4-OR	251+820	Dhanusha	Mithila	4	Puspabalpur	6.00	4.10	24.60	24.60	1	Tile roof, bamboo/mud wall, mud floor house	2074	Business Hut	8,800.00	216,480.00		Original RAP
												-	1.00	1	Toilet		Toilet	17,600.00	17,600.00		Original RAP
12	RS	21.00	Lundra Br. Aale(Ganesh Ale	12-LA-4-OR	251+880	Dhanusha	Mithila	4	Puspabalpur	5.20	5.70	29.64	29.64	1	Tile roof, bamboo/mud wall, mud floor house	2071	Business Hut	8,800.00	260,832.00		Original RAP
13	RS	19.40	Ganga Shah	13-GS-4-OR	251+890	Dhanusha	Mithila	4	Puspabalpur	5.00	8.90	44.50	44.50	1	Tile roof, bamboo/mud wall, mud floor house with toilet	2059	Residence	8,800.00	391,600.00		Original RAP
										2.70	4.00	10.80	10.80	1	Roof CGI brick cemented wall,floor cemented	2074	Business Hut	16,500.00	178,200.00		Original RAP
										3.60	3.80	13.68	13.68	1	Temporary Taharo		Chhapro	2,750.00	37,620.00		Original RAP
14	LS	21.00	Pabitra Devi Sonarni	14-PS-3-OR	253+920	Dhanusha	Mithila	3	Lalvitti	4.40	11.30	49.72	49.72	1	Tile roof, mud+ wooden wall, mud floor house	2075	Residence	8,800.00	437,536.00		Original RAP
15	RS	23.90	Shubha Narayan Singh (Cast Change)	15-SS-3-OR	255+338	Dhanusha	Mithila	3	Shreepur	15.40	4.20	64.68	64.68	1	Roof cement tile,bamboo+ mud floor, pcc piller wood	2076	Residence	8,800.00	569,184.00		Original RAP
16	LS	20.00	Bihartlal Mahato(Urmila devi	16-BM-5-OR	256+186	Dhanusha	Mithila	5	Near Basai Bridge	4.90	6.30	30.87	30.87	1	Roof CGI sheet+CGI+ bamboo wall and mud tea shop	2077	Business Hut	9,900.00	305,613.00		Original RAP

17	RS	22.30	Ram Abatar Shah	17-RS-6-OR	257+145	Dhanusha	Mithila	6	Dhalkebar	4.40	2.70	11.88	11.88	1	Roof CGI sheet +wood Brick cement wall floor pcc	2076	Business Hut	16,500.00	196,020.00		Original RAP
		16.50								5.30	4.40	23.32	23.32	1	Temporary Taharo			2,750.00	64,130.00		Original RAP
18	LS	23.10	Birendra Kumar Yadav	18-BY-6-OR	257+345	Dhanusha	Mithila	6	Dhalkebar	7.80	1.90	14.82	14.82	1	Roof asbestos + wood Brick cement wall Floor pcc	2059	Business	16,500.00	244,530.00		Original RAP
19	RS	23.30	Laxman Shah/Kailash Shah	19-LS-6-OR	257+408	Dhanusha	Mithila	6	Dhalkebar	14.40	2.70	38.88	38.88	1	Roof asbestos + bamboo brick cement wall floor pcc	2045	Business	16,500.00	641,520.00		Original RAP

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
20	RS	17.40	Jimidevi Mahato	20-JM-7-OR	256+600	Dhanusha	Mithila	7	Near Munici.	4.50	3.50	15.75	15.75	1	Roof tile bamboo mud wall floor mud	2076	Residence	8,800.00	138,600.00		Original RAP
21	LS	22.00	Birendra Shah/Sushil Shah	21-BS-8-OR	259+800	Dhanusha	Mithila	8	Jamunbas			-		2	Toilet-without septic tank	2072	Toilet	17,600.00	35,200.00		Original RAP

Project Affected Household from extended part temporary structures of original RAP

1	RS		Dev Narayan Mahato	1-DM-9-ET	248+735	Dhanusha	Dhanushdham	9	Kanchchi bazar	3.30	3.50	11.55	11.55	1	Roof cement tile Bamboo wall mud floor	2075	Business	8,800.00	101,640.00		From Extended
2	LS	16.60	Ram Chandra Mahato	2-RM-3-ET	253+940	Dhanusha	Mithila	3	Lalvitti	4.30	3.80	16.34	16.34	1	Tile roof ,mud +wooden wall ,mud floor	2072	Chhapro	8,800.00	143,792.00		From Extended
3	RS	19.3	Ranjana Basnet	3-RB-6-ET	257+159	Dhanusha	Mithila	6	Dhalkebar	2.80	1.70	4.76	4.76	1	Roof CGI sheet Brick wall floor cement	2070	Business	16,500.00	78,540.00		From Extended
										6.00	2.00	12.00	12.00	1	Truss CGI open floor, No wall	2070		9,900.00	118,800.00		From Extended

4	RS	19.30	Ram Sagar Mahato/Sitaram Mahoto	4-RM-6-ET	257+167	Dhanusha	Mithila	6	Dhalkebar	10.30	5.00	51.50	51.50	2	Rcc House Brick Cement wall Pcc floor	2068	Business/Residence	24,200.00	2,492,600.00		From Extended
										5.50	4.00	22.00	22.00	1	Roof asbestos + wood brick cement wall floor pcc	2068	Business	16,500.00	363,000.00		From Extended
5	LS	22.70	Dipendra Presad Shah	5-DS-7-ET	257+830	Dhanusha	Mithila	7	Dhalkebar	6.40	2.30	14.72	14.72	1	roof GI sheet brick cement wall floor PCC	2062	Residence	16,500.00	242,880.00		From Extended
6	LS	22.4	RaJ Lal Yadav	6-RY-7-ET	258+230	Dhanusha	Mithila	7	Near Municipality	2.30	3.30	7.59	7.59	1	CGI roofing +wood wall Bamboo+mud +attached brick cement wall	2076	Residence/ Business	9,900.00	75,141.00		From Extended
7	LS	22.30	Ram Lovit Yadav	7-RY-7-ET	258+255	Dhanusha	Mithila	7	Near Municipality	4.80	9.00	43.20	43.20	1	roof tile+wood bamboo+mud wall,Cattle shed temp. structure	2068	Residence	8,800.00	380,160.00		From Extended
8	LS	22.30	Dukhi Yadav/Hari Yadav	8-DY-7-ET	258+255	Dhanusha	Mithila	7	Near Municipality	3.30	2.60	8.58	8.58	1	roof tile+wood bamboo+mud wall	2074	Kitchen	8,800.00	75,504.00		From Extended

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
9	LS	17.90	Rajendra Sah	9-R-8-ET	259+820	Dhanusha	Mithila	8	Dhalkebar	5.10	8.80	44.88	44.88	1	Cement tile wood+mud House	2068	Business	8,800.00	394,944.00		From Extended

Newly Identified Project Affected Households of RoW

1	LS	24.70	Subarna Subedi	1-SS-8-N	238+815	Dhanusha	Ganeshman Charnath	8	Portaha	4.65	0.90	4.19	4.19	1	CGI roof, Block wall, floor cemented, single story old house	2075	Business	16,500.00	69,052.50		New identified from RoW
										4.65	3.70	17.21	17.21	1	CGI sheet +wooden post no wall			9,900.00	170,329.50		
2	LS	23.70	Bipin Kumar Shah	2-BS-7-N	238+940	Dhanusha	Ganeshman Charnath	7	Portaha	22.40	1.30	29.12	29.12	1	CGI roof,brick wall,cemented floor,one story house	2065	Business	16,500.00	480,480.00		New identified from RoW
										3.30	1.00	3.30	3.30	1	CGI roof,brick cement wall, cemented floor		Business	16,500.00	54,450.00		
3	RS	23.50	Ram Charitra Yadav	3-RY-7-N	239+400	Dhanusha	Ganeshman Charnath	7	Godar bazar	18.25	1.50	27.38	27.38	1	CGI roof,brick masonary , open wall,floor cemented house	2065	Abandoned House	16,500.00	451,687.50		New identified from RoW

4	RS	24.10	Mahadev Mahato	4-MM-7-N	239+410	Dhanusha	Ganeshman Charnath	7	Godar bazar	9.10	0.90	8.19	8.19	1	RBC roof with brick wall house (old house)	2050	Abandoned House	16,500.00	135,135.00		New identified from RoW
5	RS	23.00	Ram Sinesh Devi Sahani	5-RS-6-N	239+575	Dhanusha	Ganeshman Charnath	6	Godar bazar	3.10	2.00	6.20	6.20	1	Tile roof,brick cemen wall,floor cemented (projection only)	2072	Business	8,800.00	54,560.00		New identified from RoW
6	RS	24.00	Bhola Kumar Sha	6-BS-6-N	239+590	Dhanusha	Ganeshman Charnath	6	Godar bazar	7.05	0.90	6.35	6.35	2	RBC with brick masonry house	2060	Residence	16,500.00	209,385.00		New identified from RoW
										6.70	1.00	6.70	6.70	1	RBC with brick masonry house		Residence	16,500.00	110,550.00		
										6.10	2.00	12.20	12.20	1	Temporary Taharo		Taharo	2,750.00	33,550.00		
7	RS	22.90	Surendra Prasad Jaiswal	7-SJ-6-N	239+620	Dhanusha	Ganeshman Charnath	6	Godar bazar	9.60	2.10	20.16	20.16	1	Roof CGI sheet +Bamboo wall			9,900.00	199,584.00		New identified from RoW
8	RS	24.20	Bardri parsad Ghimire	8-BG-6-N	239+705	Dhanusha	Ganeshman Charnath	6	Godar bazar			-	1.00	1	Toilet with septic tank	2068	Toilet	24,200.00	24,200.00		New identified from RoW
9	RS	24.50	Narayan parsad Ghimire	9-NG-6-N	239+710	Dhanusha	Ganeshman Charnath	6	Godar bazar	5.90	0.50	2.95	1.00	1	CGI Sheet roof,brick masonary wall, floor cemented house	2070	Residence	16,500.00	16,500.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
10	RS	23.05	Jitu mahato (Pinki Kumari Mahato)	10-JPKM-6-N	239+720	Dhanusha	Ganeshman Charnath	6	Godar bazar	4.90	1.95	9.56	9.56	1	Roof tile +wood brick cement wall floor pcc	2062	Business	13,200.00	126,126.00		New identified from RoW
11	RS	21.25	Shiv Kumari	11-SK-6-N	239+920	Dhanusha	Ganeshman Charnath	6	Godar bazar	5.40	3.00	16.20	16.20	1	CGI roof +wood woth open wall	2072	Business Hut	9,900.00	160,380.00		New identified from RoW
12	LS	22.10	Radha Saud	12-RS-8-N	246+255	Dhanusha	Dhanushadham	8	Bhimvan	3.40	2.50	8.50	8.50	1	Roof Tile +bamboo wall	2073	Business	8,800.00	74,800.00		New identified from RoW
13	RS	22.90	Suraj Lama	13-SL-9-N	246+990	Dhanusha	Dhanushadham	9	Near army camp	3.15	2.10	6.62	6.62	1	Roof CGI ,brick cement wall, floor cemented projection	2072	Residence	16,500.00	109,147.50		New identified from RoW
14	RS	23.20	Uddha Bahadur Thapa	14-UT-9-N		Dhanusha	Dhanushadham	9	Near army camp			-	1.00	1	Toilet(Charpi)			17,600.00	17,600.00		New identified from RoW
15	RS	22.00	Ambika Balampaki	15-AB-9-N	246+245	Dhanusha	Dhanushadham	9	Near army camp	2.70	2.80	7.56	7.56	1	Tile roof, bamboo /mud wall, mud floor wih septic tank	2072	Business	8,800.00	66,528.00		New identified from RoW
16	LS	22.00	Kumeri devi Sah Sunar /Nattuni Sah Sunar	16-KSNS-9-N	248+560	Dhanusha	Dhanushadham	9	Near army camp	6.40	3.00	19.20	19.20	1	Tile roof, bamboo /mud wall, mud floor wih septic tank		Residence	8,800.00	168,960.00		New identified from RoW
17	LS	24.75	Lalit Lama	17-LL-9-N	247+080	Dhanusha	Dhanushadham	9	Dharapani chowk	6.20	0.25	1.55	1.55	1	Rcc with brick wall house +CGI roof and truss projection only	2072	Business	24,200.00	37,510.00		New identified from RoW
18	RS	22.50	Jhagaru Mahato	18-JM-9-N	247+610	Dhanusha	Dhanushadham	9	Dharapani chowk	9.50	2.50	23.75	23.75	1	CGI Sheet roof,brick masonary wall, floor cemented house	2073	Business	14,300.00	339,625.00		New identified from RoW
19	RS	24.20	Ashok kumar Mahato	19-AM-9-N	247+630	Dhanusha	Dhanushadham	9	Dharapani chowk	3.00	0.80	2.40	2.40	1	Tile roof ,brick +wooden cement wall ,floor cemented , plank floor	2072	Business	8,800.00	21,120.00		New identified from RoW
20	RS	23.40	Lal Bihari Yadav	20-LY-9-L	248+630	Dhanusha	Dhanushadham	9	Kanchchi bazar	7.00	4.90	34.30	34.30	1	Tile roof, bamboo/ mud wall,mud floor	2065	Residence	8,800.00	301,840.00		New identified from RoW
21	RS	22	Dev Kumar Gyawak	21-DG-4-N	251+495	Dhanusha	Mithila	4	Puspabalpur	5.10	3.00	15.30	15.30	2	Tile roof, bamboo/ mud wall, wooden floor and ground floor cemented+	2065	Residence	8,800.00	269,280.00		New identified from RoW
										4.00	1.50	6.00	6.00	1	CGI Bamboo+mud	2065	Kitchen	9,900.00	59,400.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
22	LS	23.00	Bir Kumari Tamangni	22-BT-4-N	251+649	Dhanusha	Mithila	4	Puspabalpur	3.30	3.30	10.89	10.89	1	Mud House with Bamboo wall	2067	Residence	8,800.00	95,832.00		New identified from RoW
23	LS	21.50	Man bahadur Gyawak	23-MG-4-N		Dhanusha	Mithila	4	Puspabalpur	4.00	3.20	12.80	12.80	1	Temporary Taharo	2074	Chhapro	2,750.00	35,200.00		New identified from RoW
24	LS	20.00	Tek Bahadur Bulan	24-TB-4-N	251+900	Dhanusha	Mithila	4	Puspabalpur	5.60	4.50	25.20	25.20	1	Roof Tile+ Bamboo Wood+ Mud Wall + PCC floor	2065	Business	8,800.00	221,760.00		New identified from RoW
25	LS	21.00	Ram Parbodha Mahato	25-RM-4-N	252+07	Dhanusha	Mithila	4	Puspabalpur	4.00	4.40	17.60	17.60	1	Roof CGI ,brick cement wall,floor cemented house	2062	Residence	16,500.00	290,400.00		New identified from RoW
26	LS	21.00	Lalit Mahato	26-LM-4-N	252+07	Dhanusha	Mithila	4	Puspabalpur	4.20	2.10	8.82	8.82	1	Roof CGI ,brick cement wall,floor cemented house	2062	Residence	16,500.00	145,530.00		New identified from RoW
27	RS	24.00	Dita Tamang (gyawak)	27-DT-4-N	252+050	Dhanusha	Mithila	4	Puspabalpur	5.00	1.00	5.00	5.00	2	Tile roof ,mud +wooden wall ,floor cemented , plank floor	2072	Residence	8,800.00	88,000.00		New identified from RoW
28	LS	22.00	Amar Bahadur Bulung	28-AB-4-N	252+101	Dhanusha	Mithila	4	Puspabalpur	8.90	4.00	35.60	35.60	1	Cement tile roof, Bamboo mud wall +Floor PCC	2068	Residence	8,800.00	313,280.00		New identified from RoW
29	LS	21.45	Nakuni Mahato	29-NM-3-N	253+500	Dhanusha	Mithila	3	Lalvitti	5.10	4.20	21.42	21.42	1	Tile roof, bamboo/ mud wall,mud floor cattle shed	2072	Residence	8,800.00	188,496.00		New identified from RoW
30	LS	21.90	Rajlal Mahato	30-RM-3-N	253+900	Dhanusha	Mithila	3	Lalvitti	6.30	3.10	19.53	19.53	1	Tile roof ,mud +wooden wall ,mud floor (kitchen)	2073	Kitchen	8,800.00	171,864.00		New identified from RoW
31	LS	15.30	Rajeshwor Mahato	31-RM-3-N	253+960	Dhanusha	Mithila	3	Lalvitti	4.60	4.20	19.32	19.32	1	Tile roof ,mud +wooden wall ,mud floor	2074	Chhapro	8,800.00	170,016.00		New identified from RoW
32	LS	22.30	Ajay Thakur	32-AT-5-N	254+200	Dhanusha	Mithila	5	Shripur	7.40	2.30	17.02	17.02	1	Tile roof ,mud +bamboowall ,mud floor (kitchen)	2072	Residence	8,800.00	149,776.00		New identified from RoW
33	LS	20.50	Shusila devi Thakur	33-ST-5-N	255+240	Dhanusha	Mithila	5	Shripur	5.80	4.20	24.36	24.36	1	Tile roof, bamboo/ mud wall,mud floor cattle shed	2074	Residence	8,800.00	214,368.00		New identified from RoW
34	LS	15.90	Fekeni Devi Mahato	34-FM-5-N	256+105	Dhanusha	Mithila	5	Near basai pul	6.00	3.80	22.80	22.80	1	Roof CGI sheet + CGI +bamboo wall & mud (tea shop)	2075	Business	9,900.00	225,720.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
35	LS	23.85	Krishna Lama	35-KL-6-N	256+740	Dhanusha	Mithila	6	Dhalkebar	4.20	1.15	4.83	4.83	1	CGI roof+ wooden and bamboo wall and floor mud house	2072	Residence	9,900.00	47,817.00		New identified from RoW
36	RS	24.10	Ram Prasad Das	36-RD-6-N	257+142	Dhanusha	Mithila	6	Dhalkebar	3.20	0.90	2.88	2.88	1	Rcc House Brick Cement wall Pcc floor	2062	Business	24,200.00	69,696.00		New identified from RoW
37	RS	18.20	Rudal Shah	37-RS-6-N	257+184	Dhanusha	Mithila	6	Dhalkebar	6.80	5.30	36.04	36.04	2	Rcc House Brick Cement wall Pcc floor	2065	Residence/ Business	24,200.00	1,744,336.00		New identified from RoW
38	RS	19.00	Minna Kumari Das	38-MD-6-N	257+189	Dhanusha	Mithila	6	Dhalkebar	6.00	4.10	24.60	24.60	3	Rcc House Brick Cement wall Pcc floor	2065	Residence/ Business	24,200.00	1,785,960.00		New identified from RoW
39	RS	20.25	Bijay Kumar Yadav	39-BY-6-N	257+194	Dhanusha	Mithila	6	Dhalkebar	4.75	3.30	15.68	15.68	1	roof asbestos + wood brick cement wall + floor pcc	2065	Business	16,500.00	258,637.50		New identified from RoW
40	RS	20.25	Aroon Kumar Yadav	40-AY-6-N	257+197	Dhanusha	Mithila	6	Dhalkebar	4.75	3.10	14.73	14.73	1	roof asbestos + wood brick cement wall + floor pcc	2065	Business	16,500.00	242,962.50		New identified from RoW

41	RS	20.25	Laxman Yadav	41-LY-6-N	257+199	Dhanusha	Mithila	6	Dhalkebar	6.85	4.75	32.54	32.54	1	CGI roof + wood brick cement wall + floor pcc	2068	Business	16,500.00	536,868.75		New identified from RoW
42	LS	22.80	Lalit Tamang	42-LT-6-N	257+394	Dhanusha	Mithila	6	Dhalkebar	3.50	2.20	7.70	7.70	1	Roof brick+wood brick cement wall.RBC. floor pcc	2068	Business	16,500.00	127,050.00		New identified from RoW
43	RS	23.65	Ram Kumar Mahato	43-RM-6-N	257+450	Dhanusha	Mithila	6	Dhalkebar	11.50	1.35	15.53	15.53	4	Rcc House Brick Cement wall Pcc floor	2062	Residence/ Business	24,200.00	1,502,820.00		New identified from RoW
44	RS	23.00	Pashupati Plyboard Industry P.Ltd	44-PIL-7-N	257+853	Dhanusha	Mithila	7	Dhalkebar	5.30	2.00	10.60	10.60	1	CGI sheet+wood Brick cement wall floor cement		Business	16,500.00	174,900.00		New identified from RoW
45	RS	23.00	Ram Abatar Sing	45-RS-7-N	257+853	Dhanusha	Mithila	7	Dhalkebar	5.30	2.00	10.60	10.60	1	CGI sheet+wood Brick cement wall		Business	16,500.00	174,900.00		New identified from RoW
46	LS	22.00	Laxmi Kumari Lama	46-LL-7-N	257+857	Dhanusha	Mithila	7	Dhalkebar	1.75	2.00	3.50	3.50	1	CGI sheet+wood Brick cement wall floor cement		Business	16,500.00	57,750.00		New identified from RoW
47	RS		Bechan Shah	47-BS-7-N	258+190	Dhanusha	Mithila	7	Dhalkebar	4.20	4.00	16.80	16.80	1	Temporary Taharo CGI roof and mud mortar wall	2074	Chhapro	9,900.00	166,320.00		New identified from RoW

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
48	RS	21.70	Upendra Shah	48-US-7-N	258+180	Dhanusha	Mithila	7	Dhalkebar	7.90	5.20	41.08	41.08	1	Roof Tile+bambo wall Mud Floor Kitchen	2070	Residence	8,800.00	361,504.00		New identified from RoW
49	RS	17.70	Samundri Devi Kusbah	49-SK-7-N	258+610	Dhanusha	Mithila	7	Dhalkebar	4.20	4.50	18.90	18.90	1	CGI sheet roof bamboomud wall Mud floor Kitchen	2070	Residence	9,900.00	187,110.00		New identified from RoW
50	RS	15.35	Sabitri Devi	50-SD-7-N	258+620	Dhanusha	Mithila	7	Dhalkebar	3.40	4.20	14.28	14.28	1	Tile roof bamboomud wall Mud floor Kitchen	2070	Residence	8,800.00	125,664.00		New identified from RoW
51	LS	23	Nirmala Adhikari	51-NA-8-N	258+950	Dhanusha	Mithila	8	Dhalkebar	5.20	2.00	10.40	10.40	1	Rcc Piller with Brick wall Houlse	2072	Residence	16,500.00	171,600.00		New identified from RoW
										2.60	2.60	6.76	6.76	1	Tile roof brick wall floor cemente		Residence	8,800.00	59,488.00		New identified from RoW
52	RS	21.30	Hasta Bahadur Biswakarma	52-HB-8-N	259+110	Dhanusha	Mithila	8	Dhalkebar	8.50	3.70	31.45	31.45	1	tile roof bamboo+mud wall mud floor	2075	Residence	8,800.00	276,760.00		New identified from RoW
52	Total																				

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex-1: 1.2 Project Affected Private Households with Identity Lot-2

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road
Projected Affected Private Structures, Badahari Bridge to Phuljor Section (Lot-2, 260+100 to 289+840, 29.740km)

SN	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Length (m)	Bredth (m)	Area (Sq m)		Stories	Type of Structures	Construction Year	Structure type and usages	Rate	Total Resettlement Cost of the Structure (NRs.)	Photo	Remarks
							Municipality	Ward	Location			Total Affected Area	Affected Area								
Project Affected Household from Original RAP																					
1	RS	18.5	Dipika Khatri	1-DK-5-OR	271+305	Mahottari	Bardibas	5	Gaushala	9.80	4.40	43.12	43.12	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Residence	8,800.00	379,456.00		Original RAP
2	RS	17.4	Rekha Devi Chaudhary	2-RC-5-OR	271+340	Mahottari	Bardibas	5	Gaushala	10.50	4.30	45.15	45.15	1	Wood and bamboo pillar / Bamboo wall with mud mortar and Hay and Tarpaulin sheet roof	2059	Business/ Residence	5,500.00	248,325.00		Original RAP
3	RS	9.2	Shrawan Kumar/Anita Mahoto	3-SM-5-OR	275+270	Mahottari	Bardibas	5	Tuteshwor	8.60	4.50	38.70	38.70	1	Wooden pillar / Bamboo wall with mud mortar and Concrete tile roof	2049	Business/ Residence	8,800.00	340,560.00		Original RAP
										3.30	3.20	10.56	10.56	1	Wooden pillar / No wall and Concrete tile roof			5,866.67	61,952.00		Original RAP
4	RS	18	Mukunda Mahato	4-MM-5-OR	275+290	Mahottari	Bardibas	5	Tuteshwor	8.70	5.70	99.18	99.18	2	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2052	Business/ Residence	8,800.00	1,745,568.00		Original RAP
5	RS	6	Sunila Kumari Mahoto	5-SM-5-OR	275+285	Mahottari	Bardibas	5	Tuteshwor	5.40	3.70	19.98	19.98	1	Wodden pillar / Gabion mess wall and Concrete tile roof	2074	Business/ Residence	8,800.00	175,824.00		Original RAP
6	RS	9.1	Prakash Sarki	6-PS-10-OR	279+910	Mahottari	Bardibas	10	Laxmaniya	5.30	4.20	22.26	22.26	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Business/ Residence	8,800.00	195,888.00		Original RAP
										11.70	5.20	60.84	60.84	1	Wodden pillar / Bamboo wall with mud mortar and Concrete tile roof			8,800.00	535,392.00		Original RAP
7	RS	8.6	Suraj Kumar Ghising	7-SG-10-OR	279+935	Mahottari	Bardibas	10	Laxmaniya	16.20	6.40	103.68	103.68	1	Wooden pillar / Bamboo wall with mud mortar and Concrete tile roof	2059	Business/ Residence	8,800.00	912,384.00		Original RAP
										10.50	6.70	70.35	70.35	1	Wooden pillar / No wall and Concrete tile roof			5,866.67	412,720.00		Original RAP
8	L.S.	9.5	Yogendra Prasad Saha	8-YS-11-OR	279+945	Mahottari	Gaushala	11	Laxmaniya	13.70	6.90	94.53	94.53	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2046	Business/ Residence	8,800.00	831,864.00		Original RAP

9	LS	18	Akbar Tamang	9-AT-11-OR	279+930	Mahottari	Gaushala	11	Laxmaniya	9.70	4.40	42.68	42.68	1	Wodden pillar / Bamboo wall with mud mortar and CGI sheet roof	2039	Residence	9,900.00	422,532.00		Original RAP
10	LS	9.1	Abita Bal	10-AB-11-OR	271+381	Mahottari	Gaushala	11	Laxmaniya	6.00	4.30	25.80	25.80	1	Wodden pillar/ Bamboo wall and Concrete tile roof	2078	Business/ Residence	8,800.00	227,040.00		Original RAP
										7.40	4.30	31.82	31.82	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof		Partial	8,800.00	280,016.00		Original RAP
11	LS	23.4	Shyam Kumari Bal	11-SB-11-OR	279+965	Mahottari	Gaushala	11	Laxmaniya	8.70	6.00	52.20	52.20	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2077	Residence	8,800.00	459,360.00		Original RAP
										5.70	3.50	19.95	19.95	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof		Partial	8,800.00	175,560.00		Original RAP
12	LS	17	Kumari Lama	12-KL-13-OR	283+195	Sarlahi	Ishworpur	13		10.20	3.50	35.70	35.70	1	Wodden pillar/ Bamboo wall Bamboo wall with mud mortar and Concrete tile roof		Residence	8,800.00	314,160.00		Original RAP
										9.50	4.00	38.00	38.00	1	Wodden pillar/ Bamboo wall with mud mortar and Concrete tile roof	2057	Residence	8,800.00	334,400.00		Original RAP

Project Affected Households from Extended part temporary structures of Original RAP

1	RS	20	Saligram Kdadgi/Dhanmaya Khadgi	1-SK-10-ET	263+775	Dhanusha	Mithila	10	Lalgadh	4.8	3.9	18.72	18.72	1	Wooden poles. Cemented tile roof. Mud mortar house	2047	Residence	8,800.00	164,736.00		From Extended
										2.8	2.3	6.44	6.44	1	Movable Structure		Business		-		From Extended
										1.9	1.6	3.04	3.04	1	Movable Structure		Business		-		From Extended
2	LS	16.75	Rita Devi Shresstha	2-RS-10-ET	264+880	Dhanusha	Mithila	10	Lalgadh	10.6	6.5	68.90	68.90	1	Wooden pillar, Bamboo Wall and Cemented tile roof	2078	Residence/ Business	8,800.00	606,320.00		From Extended
3	RS	21.5	Tara Kumari Shrestha	3-TS-10-ET	264+895	Dhanusha	Mithila	10	Lalgadh	4.1	3.5	14.35	14.35	1	Brick cement mortar wall andalbester sheet roof	2066	Business	9,900.00	142,065.00		From Extended

4	RS	22	Kul Bahadur Badwal	4-KB-10-ET	263+770	Dhanusha	Mithila	10	Lalgadh	10.5	3	31.50	31.50	1	Bamboo house Zink sheet roof	2045	Residence	8.800.00	277,200.00		From Extended
5	LS	23.4	Nirmala Rai	5-N-11-ET	279+980	Mahottari	Gaushala	11	Laxmuniya	7	4.7	32.9	32.9	1	Wooden pillar, bamboo sheet, Zink sheet roof		Residence	9,900.00	325,710.00		From Extended
6	LS	14	Phulmaya Rai	6-P-11-ET	271+305	Mahottari	Gaushala	11	Laxmuniya	6.20	3.90	24.18	24.18	1	Tile CGI roof open wall	2076	Residence	9,900.00	239,382.00		From Extended
7	LS	17	Khadga Bahadur Rai	7-KR-11-ET	279+985	Mahottari	Gaushala	11	Laxmuniya	6.2	4.2	26.04	26.04	1	Wooden pillar, bamboo sheet, Zink sheet roof		Residence	8,800.00	229,152.00		From Extended
8	LS	18	Krishna Prasad Bhattrai	8-KB-13-ET	283+165	Sarlahi	Ishworpur	13	Bankhe Chowk	6.5	5.2	33.8	33.8	1	Wooden Pillar, bamboo sheet, cemented tali roof		Residence/ Business	9,900.00	334,620.00		From Extended
										4	3	12	12	1	Wooden Pillar, no walls, tarpaulin sheet roof		Tahara	2,750.00	33,000.00		From Extended
Newly identified Project Affected Households of Row																					
1	RS	12.80	Badrinarayan Shah	1-BS-9-N	261+020	Dhanusha	Mithila	9	Badahari	3.40	7.30	24.82	24.82	1	ms post with CGI roof with open wall		Business	9,900.00	245,718.00		New identified from RoW
2	RS	16.00	Rabindra Thakur	2-RT-9-N	261+025	Dhanusha	Mithila	9	Badahari	4.60	3.70	17.02	17.02	1	ms post with CGI roof with open wall		Business	9,900.00	168,498.00		New identified from RoW
3	RS	17.5	Gopal Lal Shrestha	3-GS-9-N	261+070	Dhanusha	Mithila	9	Badahari	5	3.6	18.00	18.00	1	Asbestoss roof+wood brick cement wall	2059	Residence /Business	#######	237,600.00		New identified from RoW
4	RS	11	Satrudhan Mahato	4-SM-9-N	261+080	Dhanusha	Mithila	9	Badahari	9.7	4.3	41.71	41.71	1	RCC Pillar, Brick wall Zink sheet roof and 3 Shutters	2061	Residence/ Business	#######	688,215.00		New identified from RoW

5	RS	11	Dhiraj Kumar Mahato	5-DM-9-N	261+100	Dhanusha	Mithila	9	Badahari	12.4	2.6	32.24	32.24	1	Rcc Pillar, Brick wall, Zink sheet roof and Shutters	2060	Residence/ Business	#######	531.960.00		New identified from RoW
6	LS	22.7	Shanti devi Sahani	6-SS-9-N	261+800	Dhanusha	Mithila	9	Badahari	3.4	2.85	9.69	9.69	1	Wooden poles , khar covered roof and wall	2079	Residence	5.500.00	53.295.00		New identified from RoW
7	LS	23	Hira Thapamagar	7-HT-9-N	261+940	Dhanusha	Mithila	9	Badahari	12.7	2	25.40	25.40	1	Wooden pillar, Bamboo Wall and Cemented tile roof	2078	Residence/ Business	8.800.00	223.520.00		New identified from RoW
8	LS	20	Puja Kumari Sah	8-PS-9-N	261+960	Dhanusha	Mithila	9	Badahari	6.4	4.6	29.44	29.44	1	Temporary Tahra	2079		2.750.00	80.960.00		New identified from RoW
9	RS	17	Devi Maya Koiri	9-DK-5-N	271+310	Mahottari	Bardibas	5	Gaushala Chowk			30	30	1	Wooden Pillar, Bamboo sheet, hay roof		Residence	8.800.00	264.000.00		New identified from RoW
10	LS	18	Aash Bahadur Gole	10-AG-11-N	271+309	Mahottari	Gaushala	11	Laxmuniya	6.30	4.20	26.46	26.46	1	Tile roof wood Piller bamboo mud mortar	2076	Residence	9.900.00	261.954.00		New identified from RoW
11	RS	11	Dadhi Ram Gautam	11-DG-10-N	279+285	Mahottari	Bardibas	10	Banpath/Khayarmara	7.00	4.80	33.60	33.60	1	Tile Roof wood Piller bamboo wall	2060	Business	8.800.00	295.680.00		New identified from RoW
12	RS	11	Suraj Man Thokar	12-ST-9-N	261+85	Dhanusha	Mithila	9	Badahari			12	12	1	Zink sheet roof and shutter		Residence/ Business	#######	220.704.00		New identified from RoW

32 Total

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex-1: 1.3 Project Affected Private Households with Identity Lot-3

Final RAP Annexes with original RAP, extended and newly identified households of Kamala-Dhalkebar-Bagmati section of KDP road
Projected Affected Private Structures, Phuljor to Bagmati (East Canal) Section (Lot-3, 289+840 to 312 + 785, 22.945km)

S. N	Side	Distance from C.L. (m)	Name of structure owner	Unique ID	Chainage	District	Address			Area (Sq m)			Storie s	Type of structures	Present usages	Rate	Total Resettlement Cost of the Structure	Photo
							Municip ality	Ward	Location	Length	Breadth	Total Affected Area						
Project Affected Household from Original RAP																		
1	RS	16.50	Samu Thapa (Citizenship No - 192097/36)	1-ST-5-OR	290+150	Sarlahi	Ishworpur	5	Phuljor	3.30	4.50	14.85	1	Bamboo stick wall and CGI sheet roof.	Business Shop (Tea/Snack)	5,500.00	81,675.00	
		23.90								6.25	1.10	6.88	1	Covered with CGI sheet with CGI roof	Residence	5,500.00	37,840.00	
2	LS	14.50	Lammaya Syangtan	2-LS-4-OR	300+700	Sarlahi	Hariwon	4	Tinghhare Tole	6.20	4.80	29.76	1	Brick with mud wall and Cemented tile roof.	Residence + toilet	13,552.00	403,307.52	
3	RS	21.20	Sambhu Malli	3-SM-11-OR	303+700	Sarlahi	Hariwon	11	Shruti Bikas	6.50	3.80	24.70	1	Wooden pole bamboo strip with mud wall CGI roof	Residence + Toilet	8,800.00	217,360.00	
4	L.S.	13.10	Jit Bdr. Balampaki Magar	4-JB-1-OR	308+500	Sarlahi	Bagmati	1	Panitanki	3.70	5.20	19.24	1	Wooden pillar with bamboo strip with mud wall and tile roof	Business Shop/ Residence	8,800.00	169,312.00	
5	LS	21.00	Nen Kumari Mahato	5-NM-12-OR	312+800	Sarlahi	Bagmati	12	Karmaiya	4.00	5.00	20.00	2	Brick plastered wall and cemented tile roof.	Residence/shop (vegetable)	13,552.00	542,080.00	
6	LS	19.00	Sonam Tamang (Lama)	6-ST-12-OR	312+ 900	Sarlahi	Bagmati	12	Karmaiya	8.00	5.00	40.00	1	Bamboo strip with mud wall and Cemented tile roofing.	Residence	9,900.00	396,000.00	
Project Affected Households from Extended part temporary structures of Original RAP																		
1	RS	20.30	Bishnu Dahal	1-BD-5-ET	290+005	Sarlahi	Ishworpur	5	Ishworpur	4.70	5.80	27.26	1	Wall covered with Zink sheet and roof covered with tile and Zink sheet.	business	8,800.00	239,888.00	
2	LS	9.40	Lankaman Moktan	2-LM-5-ET	290+120	Sarlahi	Ishworpur	5	Ishworpur	5.89	2.50	14.73	1	Bamboo strip covering with mud and cement tile roof	Business	5,500.00	80,987.50	
3	RS	20.30 M	Deepa Lama Moktan	3-DLM-5-ET	290+050	Sarlahi		5	Phuljor	4.70	4.30	20.21	1	Bamboo stick covered with mud and Cemented tile roof.	Business	5,500.00	111,155.00	
4	LS		Gita Basnet	4-GB-5-ET	290+075	Sarlahi	Ishworpur	5	Ishworpur	2.60	3.50	9.10	1	Jasta Covering roof	Tea Shop	8,800.00	80,080.00	

5	RS	22.70 M	Samsit Alam	5-SA-5-ET	290+550	Sarlahi	Ishworpur	5	Ishworpur	6.30	2.30	14.49	1	RCC pillar, brick wall and zink roof.	Tyre workshop	13552.00	196,368.48	
6	RS	20.30	Indra Bdr. Syangbo	6-IBS-10-ET	290+150	Sarlahi	Ishworpur	10	Piluljor	5.50	3.80	20.90	1	Wooden pole, bamboo strip with mud wall and cemented tile roof	Residence-Full affected	8,800.00	183,920.00	
7	LS	11.00	Bhesh Bdr. Budatholki	7-BB-5-ET	290+025	Sarlahi	Ishworpur	5	Ishworpur	3.50	5.10	17.85	1	Wooden pole, bamboo strip wall and Tarpaulin roof	Tea/snack Shop	2,750.00	49,087.50	
8	LS	20 M	Lal Bdr. Thing (9869642773)	8-LBT-17-ET	209+600	Sarlahi	Lalbandi	17	Lalbandi	5.70	4.00	22.80	1	wodden pole bamboo strip wall and cement tile roof	Kitchen	5,500.00	125,400.00	
9	RS	22.80 M	Ram Kumari Shah	9-RKS-7-ET		Sarlahi	Lalbandi	7	lalbandi	2.40	3.60	8.64	1	Bamboo strip wall and zink roof. (Tea/snack shop)	Khaja ghar	9900.00	85,536.00	
10	RS	23.0 M	Saroj Mandal	10-SM-7-ET		Sarlahi	Lalbandi	7	lalbandi	2.00	7.40	14.80	1	Bamboo strip wall and zink roof. (Local Hotels/tea, snack shop, 2 nos)	Hotel Khaja Ghar	9900.00	146,520.00	
11	RS	24.05	Bhim Bdr. Sindun (Tamang)	11-BT-9-ET	295+750	Sarlahi	Lalbandi	9	Lalbandi	4.94	0.95	4.69	1	Brick Plastered wall with Cemented tile roof.	Residence-Partially Front part	14,762.00	69,278.07	
		23.05								1.90	5.10	9.69	1	Bamboo strip with mud wall and CGI roof.	Kithchen-Full affected	5,500.00	53,295.00	

12	LS	17.00	Chhewang Lama	12-CL-4-ET	301+285	Sarlahi	Hariwon	4	ganesh chock	2.50	4.40	11.00	1	Brick with mud wall and zink roof	Shop	[illegible]	129,107.00	
13	LS	21.00 18.40 20.00	Ramganesh Chaudhary	13-RC-4-ET	301+475	Sarlahi	Hariwon	4	Sasapur	3.40 5.00 6.00	3.70 4.70 7.00	12.58 23.50 42.00	1 1 1	Brick wall and Cemented tile roof. brick wall and tile roof bambo	Store +Total shed rice mill	[illegible] [illegible] 5,500.00	170,484.16 318,472.00 231,000.00	
14	LS	16.50	Buddhama Lho	14-BL-4-ET	301+500	Sarlahi	Hariwon	4	Sasapur	5.60	3.30	18.48	1	Bamboo strip with mud wall and cemented tile covering roof.	Shed	8,800.00	162,624.00	
15	LS	13.30	Sukhdev Ghising (9854037003)	15-SG-4-ET	303+600	Sarlahi	Hariwon	4	Hariwan	4.25	6.25	26.56	1	Rcc Bulding with Zinc pali	Business	5,500.00	146,093.75	
16	RS	20.50	Jagadish Mallik	16-JM-11-ET	303+700	Sarlahi	Hariwon	11	Harion	4.00	3.30	13.20	1	Bamboo strip with mud wall and CGI roof.	Residence-Full affected	5,500.00	72,600.00	
17	RS	24.50	Rekha Devi	17-RD-11-ET	303+600	Sarlahi	Hariwon	11	Harion	4.25	4.00	17.00	1	Cemented wall with zinc roof.	Residence	5,500.00	93,500.00	
18	LS	20.40	Kalpana Bhandari (rent by kalam)	18-KB-11-ET	303+600	Sarlahi	Hariwon	11	kadariya cwhok	3.90	4.80	18.72	1	Work Shop brick wall and jasta	Tahara	[illegible]	253,693.44	
19	LS	22.10	Rambabu Pd Shah Kalwar	19-RS-11-ET	304+100	Sarlahi	Hariwon	11	Harion	8.90 1.00	3.60 1.30	32.04 1.30	2 1	Brick plastered/painted wall with tile roof. RCC toilet	Residence-Full affected Toilet-Full affected	14,762.00 24,200.00	945,948.96 24,200.00	
20	L.S.	23.90	Purna Kumar Shrestha [Extended]	20-PS-10-ET	306+100	Sarlahi	Hariwon	10	Harion	5.10	1.10	5.61	2	Wooden frame with CGI roof	Residence-Bardali of the home) Extended part of the home	8,800.00	98,736.00	

21	L. S.	22.00	Gokarna Rupakheti	21-GR-1-ET	309+300	Sarlahi	Bagmati	1	Bagmati	10.20	2.40	24.48	2	Cemented Plastered wall and RCC roof	Residence-Partially	17,182.00	841,230.72	
		16.40								6.30	5.20	32.76	1	Block masonry wall and Tali roof	Welding shop-Full affected	13,552.00	443,963.52	
22	LS	13.00	Rabindra k.Shrestha	22-RS-4-ET	311+350	Sarlahi	Bagmati	4	Bagmati	1.70	2.00	3.40	1	Brick plaster wall and tile roof	business	"	33,660.00	
										2.60	3.55	9.23	1		business	"	91,377.00	
23	RS	22.00	Lok Bdr. Thapa	23-LT-11-ET	311+100	Sarlahi	Bagmati	11	Bagmati	14.00	3.20	44.80	1	Cement plastered wall and Cement tile roof.	Residence-Full affected (Due to old home)	13,552.00	607,129.60	
		13.50								5.00	10.00	50.00	1	Wood pole bamboo strip wall and cemented tyle roof	Shed-Full affected	8,800.00	440,000.00	
24	RS	21.80	Govinda Pd Bhusal	24-GB-11-ET	312+400	Sarlahi	Bagmati	11	Bagmati	4.60	3.00	13.80	1	Cement plastered wall and cemented tile roofing.	Residence-Partially	14,762.00	203,715.60	
										4.60	0.50	2.30	2			14,762.00	67,905.20	
25	LS	18.00	Raju Thapa	25-RT-12-ET	312+800	Sarlahi	Bagmati	12	Bagmati	7.60	4.00	30.40	1	Block wall and cemented tile roof.iron gate	Business structure-Fully	14,762.00	448,764.80	
Newly identified Project Affected Households of Row																		
1	RS	23.70	Dawa Lama	1-DL-9-N	290+150	Sarlahi	Ishworpur	9	Phuljor	6.70	0.25	1.68	1	Cemented plastered wall and CGI covered roof	Residence-Partially	9,900.00	16,582.50	
2	RS	22.50	Yagandra Chapagai	2-YC-5-N	290+100	Sarlahi		5	Lalbandi	8.30	4.15	34.45	1	Bamboo stick covered with mud and Cemented tile roof.	Tea shop	5,500.00	189,447.50	
3	RS	20.20	Saraswati Ghising	3-SG-5-N	290+020	Sarlahi	Ishworpur	5	Ishworpur	4.50	4.80	21.60	1	Wooden pillar with CGI sheet roof	Business	5,500.00	118,800.00	
4	RS	22.10 M	Rajaram Mahato	4-RM-5-N	290+50	Sarlahi	Ishworpur	5	Ishworpur	4.40	2.20	9.68	1	Cemented pole bamboo stick with mud wall and cemented tile roofing.	Workshop	8,800.00	85,184.00	
5	RS	20.20 M	Buddha Bir Thing (9702783320)	5-BT-17-N	209+600	Sarlahi	Lalbandi	17	Ranigunj	3.80	3.80	14.44	1	Wodden pole, plastic covered wall and CGI roof	Goth	5,500.00	79,420.00	
6	LS	23.70	Khetraj Paudel	6-KP-17-N	291+200	Sarlahi	Lalbandi	17	Ranigunj	9.60	1.50	14.40	1	RCC pillar system, cement plaster wall and concrete roof	Residence-PartiallyBaranda and room	18,392.00	264,844.80	
													1	Toilet with Septic Tank		24,200.00	24,200.00	

7	RS	20.20 M	Hark Kumari Maya Bk	7-HB-17-N	209+300	Sarlahi	Lalbandi	17	Ranigunj	8.10	4.30	34.83	1	Wooden pole, plastic covered wall and CGI roof	Kitchen	5,500.00	191,565.00	
8	RS	23.80	Dunisara Ale	8-DA-6-N	293+900	Sarlahi	Lalbandi	6	Lalbandi	1.50	6.10	9.15	2	Plastered wall and Cement tile roof	Residence-fully affected	13,552.00	248,001.60	
9	RS	19.60 M	Charimaya Gurbhathan	9-CG-6-N	293+750	Sarlahi	Lalbandi	6	Lalbandi	5.40	3.30	17.82	1	wodden pole bamboo strip wall and cement tile roof	not used	5,500.00	98,010.00	
10	LS	22.50	Som Shrestha (Shiva Paudel)	10-SS-6-N	293+752	Sarlahi	Lalbandi	6	lalbandi	13.26	3.55	47.07	1	Brick wall and Cemented Zinc roof.	house	[illegible]	552,495.80	
11	LS	24.00	Prakash Thapaliya	11-PT-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	5.70	0.90	5.13	2	Brick wall and RCC roof. Old home	Shop/Residence -partially	15,972.00	163,872.72	

12	RS	23.10	Lalbabu Shah	12-LS-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	9.00	1.00	9.00	1.5	Brick wall plastered RCC building, Old home	Residence/ Business) (potato, onion store)-Partially Front part of home	15,972.00	143,748.00	
13	RS	22.50	Shalikram Lamsal	13-SL-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	16.00	1.50	24.00	2.5	RCC Pillar system and plastered wall building	Residence/ hardware business-partially	18,392.00	882,816.00	
14	RS	23.00	Hirakaji Lama	14-HL-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	7.90	1.90	15.01	1	Baranda in ground floor and room in up stair of brick wall plastered home	Residence/shop and hotel-partially- Room and varanda	15,972.00	239,739.72	
15	LS	22.00	Ramchandar Shrestha/Sudin Shrestha	15-RS-7-N	295+000	Sarlahi	Lalbandi	7	Lalbandi	6.00	3.00	18.00	2	RCC pillar system concrete roofing.	Business, Residence	18,392.00	662,112.00	
16	LS	22.50	Manjudevi Shah	16-MS-7-N		Sarlahi	Lalbandi	7	lalbandi	3.40	1.50	5.10	1	RCC pillar system concrete roofing.	Business	[illegible]	93,799.20	
17	LS	21.70	Raju Shrestha	17-RS-7-N	295+000	Sarlahi	Lalbandi	7	Lalbandi	7.50	3.30	24.75	2	Jhingati roofing old home (old type of structure)	Sweet shop	8,800.00	435,600.00	
18	LS	22.00	Shanti Lama	18-SL-7-N	295+100	Sarlahi	Lalbandi	7	Lalbandi	10.60	4.50	47.70	2.5	RCC frame structure	Business, Residence	18,392.00	1,754,596.80	

19	LS	24.00	Sita Karki	19-SK-7-N		Sarlahi	Lalbandi	7	lalbandi	5.30	1.20	6.36	3	RCC pillar system concrete roofing.	Business/ residence		350,919.36	
20	LS	24.20	ramesh khadka	20-r-7-N		Sarlahi	Lalbandi	7	lalbandi	5.25	1.30	6.83	3	RCC pillar system concrete roofing.	business/ residence		376,576.20	
21	LS	23.50	Lal kumari chauhan (ram chabilal shah shopkeeper)	21-LK-7-N		Sarlahi	Lalbandi	7	lalbandi	4.30	2.30	9.89	1	RCC pillar system concrete roofing.	Business/ residence		169,929.98	
22	RS	22.70	Rita Kumari Blon	22-RB-7-N	294+900	Sarlahi	Lalbandi	7	Lalbandi	4.55	1.30	5.92	2	Baranda in ground floor and room in up stair of brick wall plastered home	Residence/Business (hotel)-partially-Room and varanda	15,972.00	188,948.76	
23	RS	23.20 M	Mohan Shrestha	23-MS-7-N		Sarlahi	Lalbandi	7	lalbandi	1.80	6.60	11.88	1	Iron poles zink covered wall and zink roof	Hotel	14300.00	169,884.00	
24	RS	23.40 M	Rajan Shrestha (9800830554)	24-RS-7-N		Sarlahi	Lalbandi	7	lalbandi	1.60	9.00	14.40	1	Block wall with cement plastered and zink roof.	Shop/ Meat shop	14300.00	205,920.00	
25	RS	24.0 M	Bishnu Paudel	25-BP-7-N		Sarlahi	Lalbandi	7	lalbandi	1.00	5.50	5.50	1	Block wall with cement plastered and zink roof.	Kajal Furniture Udyog	14300.00	78,650.00	
26	RS	23.0 M	Bishwa Thapa	26-BT-7-N		Sarlahi	Lalbandi	7	lalbandi	2.30	3.15	7.25	1	Zink wall and zink roof. (meat shop)	Meat shop	13200.00	95,634.00	
27	RS	23.50	Shiva Sharan Bhandari	27-SB-9-N	295+550	Sarlahi	Lalbandi	9	Lalbandi	8.90	1.00	8.90	1	RCC pillar plastered wall and concrete roof.	Residence-One RCC pillar, top and baranda Partially	18,392.00	163,688.80	
28	RS	21.00	Bijay Bhandari	28-BB-9-N	295+500	Sarlahi	Lalbandi	9	Lalbandi	2.70	4.50	12.15	1	Bamboo strip and mud wall and cemented tyle roof.	Shed-Full Affected	2,750.00	33,412.50	
29	RS	24.00	Ramsharan Mainali (9854037082)	29-RM-4-N		Sarlahi	Hariwon	4	ganesh chock	1.68	1.68	2.82	1	Brick wall plaster with concrete roof.	Toilet	17600.00	17,600.00	
30	LS	19.50	Khadka Bdr. Rumba	30-KR-4-N	301+800	Sarlahi	Hariwon	4	Sasapur	2.70	5.50	14.85	1	Brick wall and Cemented tile roof.	Store		201,247.20	

31	LS	18.00	Goma Budhathoki (9814742882)	31-GB-11-N	303+200	Sarlahi	Hariwon	11	Shruti Bikas	8.05	0.70	5.64	1	Brick wall Zinc sheet roof	Businees	5,500.00	30,992.50	
32	RS	22.20	Mohan Mahato (98137068240	32-MM-11-N	303+500	Sarlahi	Hariwon	11	Harion	5.00	2.80	14.00	1	Wooden pole bamboo strip mud roof with hey roof	Business	5,500.00	77,000.00	
33	RS	24.00	Lakshman Paswan	33-LP-11-N	303+700	Sarlahi	Hariwon	11	Harion	5.00	1.00	5.00	1	Bamboo strip with mud wall and CGI roof.	Residence-Partially	5,500.00	27,500.00	
										1.50	1.50	2.25	1	CGI cover wall and CGI cover roof	Toilet-Full affected	17,600.00	17,600.00	
34	RS	23.30	Dhan Kumari Budhathoki	34-DB-11-N	303+700	Sarlahi	Hariwon	11	Harion	8.50	1.70	14.45	1	Cemented wall with zinc roof.	Residence	5,500.00	79,475.00	
35	RS	24.00	Yamuna Roka	35-YR-11-N	303+700	Sarlahi	Hariwon	11	Harion	3.00	1.00	3.00	1	Wooden wall and Cemented tile roof.	Residence-Partially	8,800.00	26,400.00	
36	LS	20.30	Peaket Petrol pump owner	36-PP-11-N	303+550	Sarlahi	Hariwon	11	kadariya cwhok	3.00	2.80	8.40	1	Cemented palaster wall GI sheet roof	Hair cutting	[illegible]	113,836.80	
37	L.S.	23.70	Chabbilal Das	37-CD-11-N	304+700	Sarlahi	Hariwon	9	Harion	10.50	0.50	5.25	1	1st row of column and Varanda portion of Building	Residence-Top portion only	15,972.00	83,853.00	
38	R.S.	20.20	Laxmi Prasad Pokhrel	38-LP-11-N	306+200	Sarlahi	hariwon	9	Nayaroad	1.80	1.50	2.70	1	Brick wall of bathroom	Toilet	17600	17,600.00	
39	R.S.	23.00	Ganesh Pokhrel	39-GP-11-N	306+250	Sarlahi	Hariwon	9	Nayaroad	1.10	0.95	1.05	1	brick wall and tali roof	Toilet	17600	17,600.00	
40	L.S.	22.50	Rajesh Kumar Gurung	40-RG-11-N	307+000	Sarlahi	Hariwon	10	Harion	5.50	2.20	12.10	1	Cement plaster wall and CGI roof	Hotel/Residence -Partially-Extended part	13,552.00	163,979.20	
41	R.S.	23.00	Prem Raj Khadka	41-PK-22-N	307+120	Sarlahi	Hariwon	9	Harion	8.60	1.00	8.60	2	Front portion of the RCC building	Residence/shop-Partially	15,972.00	274,718.40	

42	R.S.	23.20	Rajuvai Shrestha	42-RS-22-N	307+150	Sarlahi	Hariwon	9	Harion	12.75	0.80	10.20	2	Front portion of RCC building	Residence/shop-Partially	18,392.00	375,196.80	
43	R.S.	23.00	Bishma Raj Khadka	43-BK-22-N	307+100	Sarlahi	Hariwon	9	Harion	6.20	1.40	8.68	2	Wooden and cemented wall and CGI sheet roofing (old home)	Residence/ tea shop-Partially	14,772.00	256,441.92	
44	R.S.	24.20	Nerumani KC	44-NKC-22-N	307+050	Sarlahi	Hariwon	9	Harion	11.20	0.50	5.60	2	Cemented wall and tyle roofing (old home)	Residence-Partially	13,552.00	151,782.40	
45	R.S.	24.10	Bipin Kharel	45-BK-33-N	307+050	Sarlahi	Hariwon	9	Harion	1.00	9.80	9.80	3	Building of column and varada of RCC home	Residence/ shop-Partially Column and varanda	18,392.00	540,724.80	
46	R.S.	23.60	Lalit Bdr. Uprety	46-LU-22-N	307+050	Sarlahi	Hariwon	9	Harion	7.60	0.30	2.28	2	Building of the column and varanda	Residence/shop-Partially- Column and varanda	18,392.00	83,867.52	
47	L.S.	23.70	Shankar Rayamaghi [2 in other list]	47-SR-22-N	307+050	Sarlahi	Hariwon	10	Harion	3.40	1.30	4.42	2	Front portion of RCC builing	Residence/shop, Partially Column and varanda	18,392.00	162,585.28	
48	L.S.	24.10	Arjun K.C	48-AC-1.51.5-N	307+050	Sarlahi	Hariwon	10	Harion	8.30	0.90	7.47	1.5	First row of column with varanda portion. RCC building	Residence/shop-Partially Column and varanda	18,392.00	137,388.24	
49	L.S.	23.90	Bishnuhari Pote	49-BP-22-N	307+050	Sarlahi	Hariwon	10	Harion	5.40	1.10	5.94	2	Wooden wall 2 stories house with red tile roofing. (Old home)	Residence/ shop-Partially Column and varandaFull affected (Due to old home)	13,915.00	165,310.20	

50	R.S.	24.80	Ram Kumar Shah	50-RS-22-N	307+250	Sarlahi	Hariwon	9	Harion	1.95	6.50	12.68	2	Brick wall with painted and plaster and roof covered with red tiles.	Room of extended part- Full affected	14,762.00	374,216.70	
51	L.S.	23.30	Kanchhi Maya Lama	51-KL-1-N	307+800	Sarlahi	Bagmati	1	Bagmati	6.50	2.00	13.00	2	Wooden and bamboo 2 stories house with cement tile roof.	Residence-Full affected (Due to old home)	13,200.00	343,200.00	
		15.00											1	Brick wall and cemented tile roof	Toilet-Full affected	24,200.00	24,200.00	
		18.00								2.00	2.00	4.00	2	Wooden wall with cemented tile roof	Ghumpti .shop-Full affected	8,800.00	70,400.00	
		19.00								5.00	5.00	25.00	1	Bamboo strip with mud wall and CGI roof.	Goat shed-Full affected	9,900.00	247,500.00	
52	R.S.	23.50	Krishna Bahadur Gurung	52-KG-1-N	308+550	Sarlahi	Bagmati	1	Bagmati	3.00	1.50	4.50	1.5	Cement plaster house first floor wooden second floor and tile roof	Residence-Partially, Concrete ladder and Baranda	14,762.00	99,643.50	

53	RS	22.80	Ganesh Pandey	53-GP-1-N	308+112	Sarlahi	Bagmati	1	Bagmati	1.75	1.65	2.89	1	brick walland concrect roof	Toilet	17600	17,600.00	
54	RS	19.00	Narayan Pandey	54-NP-1-N	308+119	Sarlahi	Bagmati	1	Bagmati	1.20	1.50	1.80	1	cement plaster wall	Toilet	17600	17,600.00	
		21.10								4.70	3.90	18.33	1	Rcc colum and brick wall with alivestor roof	rice mill	14762	270,587.46	
55	LS	24.20	Rohan Thapa	55-RT-1-N	309+00	Sarlahi	Bagmati	1	Bagmati	10.80	0.80	8.64	2	Brick plastered wall with concrete roof on 1st floor and wooden wall and CGI sheet roofing on above 2nd floor.	Partially-Old type home	13915	240,451.20	
56	LS	23.60	Kanchha Karki	56-KK-1-N	310+100	Sarlahi	Bagmati	1	Bagmati	5.40	1.40	7.56	1	Block and wooden wall and tile roof.	Baranda and room of Residence-Partially Column,varanda and room	13,552.00	102,453.12	
		16.00								5.50	5.00	27.50	1	Wooden pole, bamboo strip and cemented tile roof	Tahara-Full affected	5,500.00	151,250.00	
		16.50											1	Block wall and tyle roof	Toilet-Full affected	24,200.00	24,200.00	
57	RS	17.30	Tilak Bdr.Karki	57-TK-1-N	311+120	Sarlahi	Bagmati	1		5.30	4.60	24.38	1	wodden poles bamboo strip and cement tile roof	Tahara	9900	241,362.00	
		24.50				Sarlahi	Bagmati		Bagmati	1.50	1.60	2.40	1	block wall and cement tile roof	toilet	17,600.00	17,600.00	
58	LS	15.50	Radhika Thapa	58-RT-4-N	311+100	Sarlahi	Bagmati	4	Bagmati	3.25	5.70	18.53	1	Cemented block wall and cement tile roof	business	13552	251050.8	
59	LS	24.00	Sindhu Maske	59-SM-12-N	312+000	Sarlahi	Bagmati	12	Bagmati	11.10	1.00	11.10	1	Cement plastered wall and Cement tile roof.	Residence-Full affected	14,762.00	163,858.20	
		24.00								1.50	1.00	1.50	1	Block wall and CGI roof	Toilet-Full affected	24,200.00	24,200.00	
60	LS	24.00	Saroj Mainali	60-SM-12-N	312+250	Sarlahi	Bagmati	12	Bagmati	0.60	4.00	2.40	3	Varanda of RCC pillar house	Residence/hotel -Partially	18,392.00	132,422.40	
61	LS	22.00	Ramkrishna K.C	61-RK-12-N	312+650	Sarlahi	Bagmati	12	Bagmati	3.50	3.00	10.50	1	Block wall & Zink sheet	busness	[illegible]	142,296.00	
										11.70	3.00	35.10	1			[illegible]	475,675.20	

62	LS	24.00	Ramji Das	62-RD-12-N	312+900	Sarlahi	Bagmati	12	Bagmati	6.10	1.00	6.10	1	RCC pillar wall and CGI Sheet roofing.	Business structure-Partially	14,762.00	90,048.20	
63	LS	19.00	Bharat Das	63-BD-12-N	312+800	Sarlahi	Bagmati	12	Bagmati	8.00	5.00	40.00	1	Bamboo strip with mud wall and Cemented tile roofing.	Residence	9,900.00	127,600.00	
										7.00	2.30	16.10	1	Wooden pillar with CGI sheet roof	Business	5,500.00	88,550.00	

64	LS	10.30	Binod Shonar	64-BS-12-N	312+801	Sarlahi	Bagmati	12	Bagmati	6.40	3.40	21.76	1	Katghara covered with CGI sheet and toilet	Business	5,500.00	119,680.00	
65	LS	9.40	Lalbabu Shah	65-LS-12-N	312+802	Sarlahi	Bagmati	12	Bagmati	4.40	5.20	22.88	1	CGI sheet roof and wall	Business	5,500.00	125,840.00	
66	LS	9.20	Lagnidevi	66-L-12-N	312+803	Sarlahi	Bagmati	12	Bagmati	6.00	6.10	36.60	1	CGI sheet roof and bamboo wall	Business	5,500.00	201,300.00	
67	LS	9.20	Birendra Gupta	67-L-12-N	312+804	Sarlahi	Bagmati	12	Bagmati	4.40	4.20	18.48	1	CGI sheet roof and bamboo wall	Business	5,500.00	101,640.00	
68	RS	9.00	Bhawani Khadka	68-R-11-N	312+805	Sarlahi	Bagmati	11	Bagmati	7.20	3.00	21.60	1	CGI sheet roof and bamboo wall	Business	5,500.00	118,800.00	
69	RS	9.00	Mina Khadka	69-R-11-N	312+806	Sarlahi	Bagmati	11	Bagmati	7.00	3.60	25.20	1	CGI sheet roof and bamboo wall	Business	5,500.00	138,600.00	
70	LS	9.30	Pradip Shah	70-PS-12-N	312+807	Sarlahi	Bagmati	12	Bagmati	6.50	4.50	29.25	1	wooden wall Alvester roof	Business	5,500.00	160,875.00	

71	LS	8.40	Dipak Khadka	71-DK-12-N	312+808	Sarlahi	Bagmati	12	Bagmati	7.90	5.40	42.66	1	CGI Sheet roof and bamboo strip wall	Business	5,500.00	234,630.00	
72	LS	8.40	Anita Lama	72-AL-12-N	312+809	Sarlahi	Bagmati	12	Bagmati	7.90	5.50	43.45	1	Bamboo wall with CGI roof	Business	5,500.00	238,975.00	
73	LS	9.50	Ramrit Shah	73-L-12-N	312+240	Sarlahi	Bagmati	12	Bagmati	7.00	2.30	16.10	1	Wooden pillar with CGI sheet roof	Business	5,500.00	88,550.00	
74	LS	20.00	Dinesh prd Shah	74-DS-12-N	311+450	Sarlahi	Bagmati	11	Bagmati	4.00	4.80	19.20	1	Wooden poles and wall and tile roof	shed	--	190,080.00	
105	Total																	

Note Unique ID is created with serial number, first letter of name& sur name, ward number and PAPS from original RAP, extenbded temporary part & newly identified

Annex 2: Project Affected Vulnerable Households[10]

Annex 2.1: Project Affected Vulnerable Households Lot -1

Project Affected Vulnerable Households, (Lot-1, Kamala to Jamunibas, 238+030 to 260+100)

Unique ID	Chainage	Address			Vulnerable Category
		Municipality	Ward	Location	
L1-VUL-1	237+355	Ganeshman Charnath	8	Portaha	Women Headed
L1-VUL-2	238+040	Ganeshman Charnath	8	Portaha	Women Headed
L1-VUL-3	238+100	Ganeshman Charnath	7	Portaha	Women Headed
L1-VUL-4	239+575	Ganeshman Charnath	6	Godar bazar	Below Poverty
L1-VUL-5	239+920	Ganeshman Charnath	6	Godar bazar	Women Headed

[10] The PAHs listed in this annex have been identified as vulnerable based on the vulnerability criteria established under the approved RAP (2024). Eligible vulnerable PAHs will receive the applicable vulnerability assistance in addition to other compensation and resettlement assistance for which they qualify, in accordance with Table 12.1 of this RAP Addendum. Names and other personal identifiers are withheld for confidentiality purpose.

L1-VUL-6	244+240	Ganeshman Charnath	1	Chaghariya	Women Headed
L1-VUL-7	246+255	Dhanushadham	8	Bhimwan	Women Headed
L1-VUL-8	246+400	Dhanusha Dham	9	Bhimwan	Women Headed
L1-VUL-9	246+245	Dhanushadham	9	Near army camp	Women Headed
L1-VUL-10	248+560	Dhanushadham	9	Near army camp	Women Headed
L1-VUL-11	251+649	Mithila	4	Puspabalpur	Women Headed
L1-VUL-12		Mithila	4	Puspabalpur	Below Poverty
L1-VUL-13	251+890	Mithila	4	Puspabalpur	Women Headed
L1-VUL-14	252+050	Mithila	4	Puspabalpur	Women Headed
L1-VUL-15	253+920	Mithila	3	Lalvitti	Women Headed
L1-VUL-16	255+240	Mithila	5	Shripur	Women Headed
L1-VUL-17	255+338	Mithila	3	Shreepur	Below Poverty
L1-VUL-18	256+186	Mithila	5	Near Basai Bridge	Below Poverty
L1-VUL-19	256+105	Mithila	5	Near basai pul	Women Headed
L1-VUL-20	256+740	Mithila	6	Dhalkebar	Below Poverty
L1-VUL-21	257+145	Mithila	6	Dhalkebar	Below Poverty
L1-VUL-22	257+159	Mithila	6	Dhalkebar	Women Headed
L1-VUL-23	257+189	Mithila	6	Dhalkebar	Women Headed
L1-VUL-24	257+853	Mithila	7	Dhalkebar	Below Poverty
L1-VUL-25	258+230	Mithila	7	Near Municipality	Below Poverty

L1-VUL-26	256+600	Mithila	7	Near Municipality	Women Headed
L1-VUL-27	258+610	Mithila	7	Dhalkebar	Women Headed
L1-VUL-28	258+620	Mithila	7	Dhalkebar	Women Headed
L1-VUL-29	258+950	Mithila	8	Dhalkebar	Women Headed
L1-VUL-30	259+110	Mithila	8	Dhalkebar	Dalit/ Below Poverty
L1-VUL-31	259+800	Mithila	8	Jamunibas	Below Poverty

Annex 2.2: Project Affected Vulnerable Households Lot -2

Project Affected Vulnerable Households, (Lot-2, Badahari to Phuljor, 260+100 to 289+840)

Unique ID	Chainage	Address			Vulnerable Category
		Municipality	Ward	Location	
L2-VUL-1	283+195	Ishworpur	13	Ishworpur	Women Headed
L2-VUL-2	283+165	Ishworpur	13	Bankhe Chowk	Below Poverty
L2-VUL-3	271+309	Gaushala	11	Laxmuniya	Below Poverty
L2-VUL-4	271+305	Gaushala	11	Laxmuniya	Women Headed
L2-VUL-5	279+985	Gaushala	11	Laxmuniya	Below Poverty
L2-VUL-6	279+980	Gaushala	11	Laxmuniya	Women Headed
L2-VUL-7	279+965	Gaushala	11	Laxmaniya	Below Poverty
L2-VUL-8	271+381	Gaushala	11	Laxmaniya	Women Headed
L2-VUL-9	279+910	Bardibas	10	Laxmaniya	Dalit/ Below Poverty

L2-VUL-10	279+930	Gaushala	11	Laxmaniya	Below Poverty
L2-VUL-11	271+340	Bardibas	5	Gaushala Chowk	Women Headed
L2-VUL-12	271+310	Bardibas	5	Gaushala Chowk	Women Headed
L2-VUL-13	263+775	Mithila	10	Lalgadh	Below Poverty
L2-VUL-14	263+770	Mithila	10	Lalgadh	Below Poverty
L2-VUL-15	261+800	Mithila	9	Badahari	Women Headed

Annex 2.3: Project Affected Vulnerable Households Lot -3 (Phuljor to near Bagmati Bridge, 289+840 to 312+ 785)

Unique ID	District	Municipality	Ward	Settlement	Remarks
L3-VUL-1	Sarlahi	Isworpur	5	Iswarpur	Women Headed
L3-VUL-2	Sarlahi	Hariwon	4	Tinghare Lachka	Women Headed
L3-VUL-3	Sarlahi	Hariwon	11	surti bikash tol	Below Poverty
L3-VUL-4	Sarlahi	Hariwon	11	surti bikash tol	Below Poverty
L3-VUL-5	Sarlahi	Hariwon	11	surti bikash tol	Women Headed
L3-VUL-6	Sarlahi	Hariwon	11	surti bikash tol	Women Headed
L3-VUL-7	Sarlahi	Hariwon	11	surti bikash tol	Below Poverty
L3-VUL-8	Sarlahi	Bagmati	1	paanityanki chowk	Below Poverty
L3-VUL-9	Sarlahi	Bagmati	1	rai khola	Women Headed
L3-VUL-10	Sarlahi	Bagmati	12	ashworya nagar	Women Headed
L3-VUL-11	Sarlahi	Bagmati	12	ashworya nagar	Women Headed

Annex-3 Project Affected Public/GoN Structures Lot 1

Annex 3.1: Project Affected Temple Lot-1

S.N.	Description	Location	Chainage	Side	Amount (NPR)
1	Relocation of Hanuman Temple	Ganeshman Charnath-8, Portaha	238+135	LHS	704,229.28
2	Relocation of DiwarTemple	Ganeshman Charnath-7, Portaha	238+140	LHS	534,654.38
3	Relocation of Shiva Temple	Ganeshman Charnath-7, Portaha	238+160	LHS	699,086.30
4	Relocation of Ganesh Temple	Ganeshman Charnath-6, Godar	239+675	LHS	378,824.49
5	Relocation of Chalsi Baba Temple	Ganeshman Charnath-7, Godar	240+490	RHS	667,035.57
6	Relocation of Diwarthan Temple	Ganeshman Charnath-4, Neer Charnath Birdge	242+180	RHS	247,895.37
7	Relocation of Hanuman Temple	Ganeshman Charnath-4, Birendrabazar	247+250	LHS	1,278,430.67
8	Relocation of Diwarthan Temple	Dhanushadham-9	247+255	RHS	300,936.91
9	Relocation of Hanuman Temple	Mithila-4	251+800	LHS	605,311.10
10	Relocation of Diwarthan	Mithila-6	257+075	RHS	543,247.05
11	Relocation of Ramjanki Mandir	Mithila-6	257+085	RHS	5,626,635.94
12	Relocation of Hanuman Temple-Ram Shinesh Shahani	Ganeshman Charnath-6, Portaha	239+590	RHS	293,768.12
13	Relocation of Dharapani Temple Paltu Mahato	Dhanushadham-9	247+670	LHS	467,268.37
14	Relocation of Ramjanki Mandir	Mithila-6	257+085	RHS	5,626,635.94
Sub-Total, [A]					**17,973,959.49**

Annex-3.2 Project Affected Passenger shed: Lot-1

S.N.	Description	Location	Chainage	Side	Amount (NPR)
1	Relocation of Passenger Shelter	Ganeshman Charnath-4, Birendra bazar	242+160	RHS	574,183.13
2	Relocation of passenger shelter with Pratibha Yuwa Club	Mithila-6	257+005	RHS	2,218,962.16
3	Relocation of Passenger Shelter	Mithila-8, Jamunibas	259+750	RHS	899,609.18
4	Relocation of Passenger shelter	Mithila-6, Dhalkebar	256+580	RHS	347,418.17
5	Relocation of Passanger shelter	Mithila-3, Hariharpur	253+180	LHS	850,630.87
6	Relocation of Passenger shelter maltol	Dhanushadham-6, maltol	249+835	LHS	735,040.69
7	Relocation of Passenger shelter	Dhanushadham-9,Bhiman	246+295	LHS	259,346.61
8	Relocation of Passenger shelter	Dhanushadham-9,Bhiman	246+300	LHS	515,420.35
9	Relocation of passenger shelter	Ganeshman Charnath-1	244+260	RHS	349,595.82
10	Relocation of passenger shelter	Ganeshman Charnath-1	244+250	RHS	349,595.82
Sub-Total, [A]					**7,099,802.80**

Annex-3.3 Project Affected Chautara: Lot-1

S.N.	Description	Location	Chainage	Side	Amount (NPR)
1	Relocation of Chautara	Dhanushadham-9,Kanchhibazar	248+715	RHS	309,504.09
2	Relocation of Chautara	Dhanushadham-9,Bhiman	246+280	LHS	180,101.01
3	Relocation of Chautara	Dhanushadham-9,Bhiman	246+280	RHS	107,879.49
4	Relocation of Chautara	Ganeshman Charnath-1	244+755	LHS	223,159.55
Sub-Total, [A]					**820,644.14**

Annex-3.4 Project Affected public toilet and wall: Lot-1

S.N.	Description	Location	Chainage	Side	Amount (NPR)
1	Relocation of public toilet	Mithila-4, Pushpalpur	251+475	RHS	1,802,322.01
2	Relocation of Health post wall	Mithila-6	246+650	LHS	420,773.66
3	Relocation of Mahendra H.S.S.	Mithila-6, Dhalkebar	257+270	RHS	906,649.65
4	Relocation of Mahendra H.S.S.-2-room	Mithila-6, Dhalkebar	257+275	RHS	1,313,856.70
5	Relocation of Sahid Smark (Arjun Mahato)	Mithila-5, Shripur	255+135	RHS	171,914.17
6	Relocation of Sahid Smark (Ganesh Garjamagar)	Mithila-8, Jamunibas	259+825	LHS	290,022.04
Sub-Total, [A]					**4,905,538.23**

Annex-3.5 Project Affected GoN. Structures: Lot-1

S.N.	Description	Location	Chainage	Side	Amount (NPR)
1	Relocation of Police Station wall	Ganeshman Charnath-8, Portaha	238+030	RHS	261,218.06
2	Relocation of traffic post	Ganeshman Charnath-8, Portaha	238+030	RHS	383,731.07
3	Relocation of passenger shelter, Police station	Ganeshman Charnath-4, Birendra bazar	243+850	LHS	349,595.82
4	Relocation of Army Camp	Dhanushadham-9	247+865	LHS	1,558,351.70
5	Relocation of Police Station	Dhanushadham-9	247+810	LHS	180,506.03
6	Relocation of Police Station (Traffic Office)	Mithila-6, Dhalkebar	257+345	RHS	5,637,496.46
7	Relocation of Traffic Iland (Bhimban Park)	Dhanushadham-9	246+275	LHS	352,558.18
8	Relocation of Traffic Iland (Dharapani Tinkune)	Dhanushadham-9	247+650	LHS	739,046.08
Sub-Total, [A]					**9,462,503.40**

Annex- 3.6 Project Affected Temple, Lot-2

S.N.	Description	Location	Chainage	Drawing Number	Estimated Cost	Side
1	Hanuman Temple	Mithila-9, Badahari bazar	261+030	KDB/LOT-02-SSP-WD-TMP-01	**1,643,987.00**	RS
2	Shiva Temple	Mithila-9, shikharpur tole	262+380	KDB/LOT-02-SSP-WD-TMP-03	**1,834,119.90**	LS
3	Mahadev Temple (small Temple)	Mithila -10, lalgadh Chowk	263+930	KDB/LOT-02-SSP-WD-TMP-03	**190,248.56**	LS
4	Bhimsen Temple (Boundary Wall With Small Typical Temple)	Mithila -10, lalgadh	264+370	KDB/LOT-02-SSP-WD-TMP-04	**510,598.05**	RS
5	Shiva Temple With Hanuman Idol	Bardibas-1, Bardibas Chowk	266+910	KDB/LOT-03-SSP-WD-TMP-05	**2,701,990.07**	RS
6	Ram Hanuman Temple	Gaushala-08, tuteshowr Chowk	275+310	KDB/LOT-03-SSP-WD-TMP-05	**2,147,423.38**	RS
7	Churiya Mai Temple	Gausala-12, Banpath Chowk	281+820	KDB/LOT-03-SSP-WD-TMP-05	**193,014.60**	LS
Sub-Total					**9,221,381.55**	

Annex- 3.7 Project Affected Waiting Shed, Lot-2

S.N	Chainage	Address	Side	Drawing Number	Quantity Estimate(NRs) Without Vat
1	262+270	Mithila-9, shikharpur tole	LS	KDB/LOT-02-SSP-WD-WS-01	**677,602.89**
2	263+685	Mithila-10, Lalgadh	LS	KDB/LOT-02-SSP-WD-WS-02	**677,602.89**
3	263+830	Mithila-10, Lalgadh	RS	KDB/LOT-02-SSP-WD-WS-03	**474,475.10**

4	264+860	Mithila-10, Lalgadh Hospital Chowk	RS	KDB/LOT-02-SSP-WD-WS-04	**1,284,858.27**
5	279+300	Bardibas-10, Khairmara Chowk	RS	KDB/LOT-02-SSP-WD-WS-05	**683,446.48**
6	281+530	Gaushala-12, Banpath Chowk	LS	KDB/LOT-02-SSP-WD-WS-06	**683,446.48**
Total					**4,481,432.11**

Annex-3.8 Project affected Chautaras, Lot-2

S. N.	Chainage	Address	Type of structure	Side	Drawing Number	Quantity Estimate(NRs) Without Vat
1	261+030	Mithila-9, Badahari Chowk	Circular 1	Right	KDB/LOT-02-SSP-WD-CHA-01	**233,818.35**
2	262+320	Mithila-9, shikharpur tole	Circular (6)	Left & Right	KDB/LOT-02-SSP-WD-CHA-02	**1,402,910.08**
3	263+930	Mithila-10, Lalgadh Chowk	Rec (1) + Circular (1)	Left	KDB/LOT-02-SSP-WD-CHA-03	**441,274.99**
4	264+152	Mithila-10, Lalgadh Chowk	Circular (1)	Right	KDB/LOT-02-SSP-WD-CHA-04	**233,818.35**
5	264+216	Mithila-10, Lalgadh Chowk	Circular (2)	Left	KDB/LOT-02-SSP-WD-CHA-05	**467,636.69**
6	264+480	Mithila-10, Lalgadh hospital Chowk	Circular (1)	Right		**233,818.35**
7	266+520	Bardibas-1, Bardibas Chowk	Circular (1)	Right	KDB/LOT-02-SSP-WD-CHA-06	**235,307.60**
8	266+762	Bardibas-1, Bardibas Chowk	Circular (1)	Right	KDB/LOT-02-SSP-WD-CHA-07	**235,307.60**
9	266+815	Bardibas-1, Bardibas Chowk	Rec (1)	Right	KDB/LOT-02-SSP-WD-CHA-08	**221,064.22**
10	267+450	Bardibas-1, Bardibas Chowk	circular (2)	Right	KDB/LOT-02-SSP-WD-CHA-09	**467,636.69**

Total	**4,172,592.91**

Annex-3.9 Project affected entrance gate and water well, Lot-2

S.N.	Title	Location	Chainage	Side	Drawing Number	Total Cost(Nrs) Without Vat	Within FW (Yes/No)	Distance from CL
1	Entrance Gate 2nos of column & Truss	Mithila-09, Shikharpur tole	262+371	LS	KDB/LOT-03-SSP-WD-EG-01	141,021.93		
2	Panchdhura Entrance Gate	Bardibas-04, Panchadhura Chowk	269+260	RS	KDB/LOT-03-SSP-WD-EG-02	655,456.28		
3	Purneshwar temple Entrance Gate	Gaushala-01, Gaushala Chowk	271+400	LS	KDB/LOT-03-SSP-WD-EG-03	865,308.77		
4	Tuteshwar temple entrance Gate	Bardibas-5, Tuteshowr Chowk	275+310	RS	KDB/LOT-03-SSP-WD-EG-04	884,657.05		
4	Water Well	Gaushala-01, Gaushla Chowk	271+350	LS	KDB/LOT-03-SSP-WD-WW-01	937,605.15		
Total								

Annex 3.10 Project affected Temple, Lot-3

S.N.	Name of Temple	Location	Chainage	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)	Side
1	Jhamkeshwor Mahadev temple	Lalbandi -17, Ranigunj	290+610	KDB/LOT-03-SSP-WD-TMP-P1-01	1,057,771.50	536,612.06	LS
2	Shiva Temple	Lalbandi - 17, Ranigunj	291+150	KDB/LOT-03-SSP-WD-TMP-P1-02	1,057,780.83	158,406.87	LS
3	Akkleshwor Mahadev (Dumdume) and 5 Nos of small temples)	Lalbandi -7, Lalbandi bazar ,	295+320	KDB/LOT-03-SSP-WD-TMP-P1-03	4,236,104.36	7,683,150.24	RS
4	Shomeshwor Mahadev	Lalbandi - 9, Bastipur ,	295+720	KDB/LOT-03-SSP-WD-TMP-P1-04	206,818.20	158,406.87	LS

S.N.	Name of Temple	Location	Chainage	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)	Side
5	Brahmathan Temple	Hariwan -4, Tinghare Tole,	301+270	KDB/LOT-03-SSP-WD-TMP-P1-05	1,151,766.72	536,612.06	LS
6	Mahadev Temple	Hariwan -4, Tinghare Tole,	301+310	KDB/LOT-03-SSP-WD-TMP-P1-06	1,290,639.92	988,702.73	RS
7	Shree Krishna Temple	Hariwan -4, Tinghare Tole,	301+580	KDB/LOT-03-SSP-WD-TMP-P1-07	206,818.20	158,406.87	RS
8	Naag Mandir	Hariwon -4, Tinghare tole,	301+640	KDB/LOT-03-SSP-WD-TMP-P1-08	206,818.20	158,406.87	RS
9	Radha Krishna Temple	Hariwan -11, Hariwan Bazar	304+190	KDB/LOT-03-SSP-WD-TMP-P1-09	5,158,426.36	4,392,504.79	LS
10	Chaturbhujeshwor Mahadev Temple(Boundary Wall)	Hariwan -9, Sukhe Pokhari ,	305+920	KDB/LOT-03-SSP-WD-TMP-P1-10	2,334,767.40	876,654.27	LS
11	Naag Temple	Bagmati -1, Adarsha tole	307+790	KDB/LOT-03-SSP-WD-TMP-P1-11	206,818.20	158,406.87	LS
12	Brahmathan Temple	In front of Sub-divisional forest office,Lalbandi -6,	293+300	KDB/LOT-03-SSP-WD-TMP-P2-01	1,057,780.83	536,612.06	RS
13	Maa Rajdevi Temple	Hariwan -4, Tinghare Tole	301+670	KDB/LOT-03-SSP-WD-TMP-P2-02	1,403,703.51	1,421,509.41	LS
14	Tarkeshwsor Mahadev Temple	Hariwan -11, Basa tole, Sugar mill	303+450	KDB/LOT-03-SSP-WD-TMP-P2-03	1,273,400.53	988,702.73	LS
15	Shiva Temple	Hariwon -9, Nocha tole	304+850	KDB/LOT-03-SSP-WD-TMP-P2-04	1,248,073.00	988,702.73	RS
16	Padmeshwor Mahadev Temple	Bagmati -1, Pani tanki chowk, Lachka	308+620	KDB/LOT-03-SSP-WD-TMP-P2-05	4,432,445.90	3,013,552.76	LS
17	Shiva Temple	Bagmati -1, Baudha Marg tole	309+000	KDB/LOT-03-SSP-WD-TMP-P2-06	1,150,949.92	536,612.06	RS
18	Ganesh Temple	Bagmati -1, Milan tole,	309+350	KDB/LOT-03-SSP-WD-TMP-P2-07	206,818.20	536,612.06	RS
			Total		**27,887,701.78**	**23,828,574.31**	

Annex 3.11 Project Affected Waiting Shed, Lot-3

S. N.	Chainage	Address	Side	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)
1	290+600	Lalbandi-17, Ranigunj	Left	KDB/LOT-03-SSP-WD-WS-01	**774,862.04**	**459,596.77**
2	294+250	Lalbandi-06, Janawadi Chowk	Left	KDB/LOT-03-SSP-WD-WS-02	**774,862.04**	**459,596.77**
3	296+080	Lalbandi-9, Campus Chowk, Bastipur	Left	KDB/LOT-03-SSP-WD-WS-03	**774,862.04**	**459,596.77**
4	300+800	Hariwan-4, Ganesh Chowk	Right	KDB/LOT-03-SSP-WD-WS-04	**774,862.04**	**459,596.77**
5	301+660	Hariwan-4, Tinghare Chowk	Right	KDB/LOT-03-SSP-WD-WS-05	**773,925.07**	**459,596.77**
6	302+540	Hariwan-8 Pakhrin tole	Right	KDB/LOT-03-SSP-WD-WS-06	**773,925.07**	**459,596.77**
7	303+000,	Hariwan-11, Basa tole	Right	KDB/LOT-03-SSP-WD-WS-07	**774,862.04**	**459,596.77**
8	303+260	Hariwan- 11, Sugar Mill, East side	Right	KDB/LOT-03-SSP-WD-WS-08	**774,862.04**	**459,596.77**
9	303+410	Hariwan-11 Sugar Mill West side	Right	KDB/LOT-03-SSP-WD-WS-09	**773,925.07**	**459,596.77**
10	305+260	Hariwan-9, Nocha tole	Right	KDB/LOT-03-SSP-WD-WS-10	**774,862.04**	**459,596.77**
11	306+100	Hariwan-9, Sukhi Pokhari	Left	KDB/LOT-03-SSP-WD-WS-11	**1,409,024.53**	**798,856.08**

S. N.	Chainage	Address	Side	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)
12	308+000	Bagmati-01, Adarsha tole	Left	KDB/LOT-03-SSP-WD-WS-12	**774,862.04**	**459,596.77**
13	308+530 Bagmati-01,	Bagmati-01, Pani tanki Chowk	Right	KDB/LOT-03-SSP-WD-WS-13	**774,862.04**	**459,596.77**
14	308+750,	Bagmati-01 (Shanti Chowk)	Right	KDB/LOT-03-SSP-WD-WS-14	**774,862.04**	**459,596.77**
15	309+250	Bagmati-01 Langhali tole, Milan chowk	Right	KDB/LOT-03-SSP-WD-WS-15	**774,862.04**	**459,596.77**
16	309+390	Bagmati-01, Milan Chowk	Left	KDB/LOT-03-SSP-WD-WS-16	**711,768.72**	**459,596.77**
17	310+390	Bagmati-04, Purano Chauki Chowk	Left	KDB/LOT-03-SSP-WD-WS-17	**774,862.04**	**459,596.77**
18	310+490	Bagmati-11 Purano Chauki Chowk	Right	KDB/LOT-03-SSP-WD-WS-18	**773,925.07**	**459,596.77**
19	311+130,	Bagmati-04 (In front of Bagmati Municipality Office, Chowk	Left	KDB/LOT-03-SSP-WD-WS-19	**774,862.04**	**459,596.77**
20	311+950	Bagmati-12, Putali Chowk	Left	KDB/LOT-03-SSP-WD-WS-20	**774,862.04**	**459,596.77**
	Total				**16,064,562.08**	**9,531,194.71**

Annex 3.12 Project affected Chautari & Religious Trees, Lot-3

S. N.	Chainage	Address	Type of structure	Nos.	Side	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)
1	291+200	Ranigunj Lalandi-17. Ranigunj bazar	Circular (1)	1	Left	KDB/LOT-03-SSP-WD-CHA-01	**255,197.49**	**148,706.41**
2	292+260	Way to Dada gaun, Ranigunj, Lalbandi -17	Rectangular (1)	1	Left	KDB/LOT-03-SSP-WD-CHA-02	**247,164.26**	**148,706.41**
3	294+250	Lalbandi-06,Janawadi chowk,	Circular (2 +2) = 4	4	Left	KDB/LOT-03-SSP-WD-CHA-03	**1,020,789.95**	**594,825.64**
4	299+220	Lalbandi -01,Nawalpur Bazar,	Rec (1) + Cir (1)	2	Left	KDB/LOT-03-SSP-WD-CHA-04	**491,061.75**	**297,412.82**
5	301+280	Tinghare, Lackha Tole, Hariwan -04	Rec (1)	1	Left	KDB/LOT-03-SSP-WD-CHA-05	**247,164.26**	**148,706.41**

S. N.	Chainage	Address	Type of structure	Nos.	Side	Drawing Number	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)
6	303+000	Hariwan -11,Bassa Tole,	Rec (1)	1	Right	KDB/LOT-03-SSP-WD-CHA-06	**247,164.26**	**148,706.41**
7	303+900	Hariwon bazar,Hariwan -11	Cir (1)	1	Right	KDB/LOT-03-SSP-WD-CHA-07	**255,197.49**	**148,706.41**
8	305+260	Hariwan -09, Nocha tole	Cir (2)	2	Right	KDB/LOT-03-SSP-WD-CHA-08	**510,394.97**	**297,412.82**
9	305+930	Sukhi Pokhari, Hariwan -09, (Sami tree)	Bench type (2)	2	Right	KDB/LOT-03-SSP-WD-CHA-09	**93,624.49**	**297,412.82**
10	311 + 120	Bagmati -4,Nearby Bagmati Municipality Office.	Bench-2	2	Left	KDB/LOT-03-SSP-WD-CHA-10	**93,624.49**	**297,412.82**
11	312+320	Karmaiya, Bagmati -12	Cir (1) + Rec (1)	2	Left	KDB/LOT-03-SSP-WD-CHA-11	**491,061.75**	**297,412.82**
	Total						**3,952,445.15**	**2,825,421.77**

Annex 3.13: Project affected Government Structures, Lot-3

S.N.	Title	Location	Type	Chainage	Drawing no	Initial Estimated Amount (NRs)	Revised Estimated Amount (NRs)
1	Ward Office	Lalbandi nagarpalika-6	Boundary wall	294+570	KDB/LOT-03-SSP-WD-ASAPS-01	80,776.03	77,856.38
2	Shree Mati Mairani School	Hariwan nagarpalika -4	Compound wall, gate, Toilets	300+810	KDB/LOT-03-SSP-WD-ASAPS-02	4,191,019.62	2,656,339.23
3	Health Post Sashapur	Hariwan nagarpalika -4	Boundary Wall,Gate	300+960	KDB/LOT-03-SSP-WD-ASAPS-03	812,126.56	759,868.51
4	Karmaiya Police Station	Bagmati nagarpalika-11	Boundary Wall,Gate,Waiting Shed,Bagwati Temple	312+375	KDB/LOT-03-SSP-WD-ASAPS-04	2,225,238.66	1,290,874.47
5	Phuljor Police Station	Ishwarpur Municipality -5	Waiting Shed , 2 nos of Column	290+000	KDB/LOT-03-SSP-WD-ASAPS-01	844,163.31	526,822.99
6	Nawalpur Police Station	Lalbandi Municipality-1	Boundary Wall,Gate,Waiting Shed	299+750	KDB/LOT-03-SSP-WD-ASAPS-03	1,166,745.25	845,584.89
7	Traffic House	Bagmati nagarpalika-11	Rcc Structure	312+400	KDB/LOT-03-SSP-WD-ASAPS-05	4,078,850.15	3,841,577.71
	Sub-Total					**13,398,919.58**	**9,998,924.18**

Annex 4: Summary of community consultation

Annex4. 1Consultation with Project Affected Persons for affecting household Structure-Lot-1

S.N.	Date	Location	Number of Participants	Issues raised in consultation	Response agreed to resolve the Issues	Responsible Agency
1	15th June 2025	Portaha Dhanusha	7	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team
2	31st June 2025	Godar Dhanusha	13	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team
3	12th August 2025	Bhimban Dhanusha	11	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team

S.N.	Date	Location	Number of Participants	Issues raised in consultation	Response agreed to resolve the Issues	Responsible Agency
4	18th August 2025	Puspawalpur Dhanusha	18	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team

Annex-4.2 Consultation with Project Affected Persons for affecting household Structure Lot-2

S.N.	Date	Location	Number of Participants	Issues raised in consultation	Response agreed to resolve the Issues	Responsible Agency
1	27th August 2025	Gaushala	6	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team
2	28th August 2025	Laxminiya	13	• Provision of Fair compensation of Affected Private Structure • Income/Employment Restoration	• Compensation agreed to be provided as per District rate also no deduction for depreciation • To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	Project In-Charge CSC Social Team
3	29th August 2025	Badahari	8	• Provision of Fair compensation of Affected Private Structure	• Compensation agreed to be provided as per District rate also no deduction for depreciation	Project In-Charge CSC Social Team

				• Income/Employment Restoration	• To be agreed with CDC also • As Provided in the RAP Resettlement assistance, rehabilitation assistance and allowance of shifting cost	

Annex-4.3 Consultations held with private structure affecting HHs (105), Lot-3

Sn	Date	Location	No of participants	Issues raised in consultation	Response agreed to resolve the issues	Responsible Agency/Person
1	10th May 2025	Hariwon	M- 10 F-15 Total-25	• Reasonable compensation of affected private assets • Income/employment Restoration • Full support of local people to project	• Compensation agreed to be provided as per current market values. • To be agreed with CDC also • Resettlement assistance, rehabilitation assistance, material shifting and dismantling	Project Office, Contractor
2	15th June 2025	Lalbandi	M-10 F-9 Total-19	• Reasonable compensation of affected private assets • Income/employment Restoration • Full support of local people to project ,	• Compensation agreed to be provided as per current market values. • To be agreed with CDC also. • Resettlement assistance, rehabilitation assistance, material shifting and dismantling	Project Office, Contractor
3	17th Jane2025	Bagmati	M-10 F-20 Total 30	• Reasonable compensation of affected private assets • Income/employment Restoration • Full support of local people to project ,	• Compensation agreed to be provided as per current market values. • To be agreed with CDC also. • Resettlement assistance, rehabilitation assistance, material shifting and dismantling	Project Office, Contractor
4	25th Jane 2025	Ishworpur	M-7 F-9 Total 16	• Reasonable compensation of affected private assets • Income/employment Restoration	• Compensation agreed to be provided as per current market values. • To be agreed with CDC also.	Project Office, Contractor

				• Full support of local people to project	• Resettlement assistance, rehabilitation assistance, material shifting and dismantling	

Annex 5: Reconciliation and Traceability of Original RAP and RAP Addendum PAHs/Structures

Comparative table of Resettlement Impacts(retained and non-retained PAH) along with new PAH of KDP Road 77km.										
Lots	**Original RAP**							**RAP Addendum**		
	Verified PAH from original RAP	**Non-retained PAH**								
		Dismantled	**Removed**	**Not found**	**Saved**	**Public structures**	**Total**	**Retained**	**New**	**Total**
1	85	3	28	6	18	0	55	30	52	82
2	43	0	11	6	5	1	23	20	12	32
3	75	1	23	5	12	3	44	31	74	105
Total	**203**						**122**	**81**	**138**	**219**
Category	**Definition**									
Dismantled	Temporary shelters recorded in the earlier RAP inventory that were dismantled by the PAHs themselves prior to the latest verification survey and were therefore no longer physically present at the time of verification.									
Removed	Structures/assets recorded in the earlier RAP inventory that were no longer physically present at the recorded location at the time of the latest verification.									
Not Found/Not Matched	Records from the earlier RAP inventory that could not be matched during the latest verification due to inconsistencies or errors in the earlier data, including incorrect chainage and/or PAH names. These records require reconciliation against the earlier RAP records.									
Saved	Structures/assets previously identified as affected in the earlier RAP inventory but subsequently verified as outside the actual project impact footprint or no longer affected due to avoidance/design adjustment, and therefore not requiring physical displacement under the verified project footprint.									
Public Structures	Structures/assets identified during reconciliation as being under public or institutional ownership/use rather than belonging to individual PAHs and therefore recorded separately for traceability.									

New PAH	PAHs identified during the latest verification that were not recorded in the earlier RAP inventory but were confirmed to be affected under the verified project impact footprint.

Annex 5.1: **Annex for non-retained PAH Lot- 1Annex for non-retained PAH**			**Remarks**
Dismantled main private structures of Original RAP			
Unique ID	**Ch.**	**Structure type**	The PAH has been identified but structures were already dismantled and constructed their new structures outside of RoW
L1-NR-1	238+400	Small shop	
L1-NR-2	239+900	Wooden shop Ghumti	
L1-NR-3	251+890	Wooden shop Ghumti	
Removed from main private structures of original RAP			
L1-NR-4	238+040	Small shop	Most of them were small business shop attached huts. During RAP verification, the structures were already removed, and they were doing their business in their houses which is beyond the RoW
L1-NR-5	238+040	Small shop	
L1-NR-6	238+040	Small shop	
L1-NR-7	239+480	Small shop	
L1-NR-8	239+870	Small shop	
L1-NR-9	239+880	Small shop	
L1-NR-10	247+684	Small shop	
L1-NR-11	251+514	Small shop	
L1-NR-12	256+400	Small shop	
L1-NR-13	257+129	Small shop	
L1-NR-14	257+147	Small shop	
L1-NR-15	257+300	Small shop	
L1-NR-16	257+320	Small shop	
Removed from extended part temporary structures of Original RAP			
L1-NR-17	253+990	Wood made shop, Plastic roof	

L1-NR-18	254+055	made with jasta and bamboo	The extended part temporary structures were removed by themselves
L1-NR-19	254+185	Attached with Mud Chhapro	
L1-NR-20	255+345	Attache with shop, Jasta roof	
L1-NR-21	255+350	Attached with RCC ghar, Zink sheet roof	
L1-NR-22	256+500	Bamboo workshop	
L1-NR-23	256+715	Only jasta and iron post	
L1-NR-24	257+140	Removal of cantilever of shop, with zink sheet	
L1-NR-25	257+335	Only jasta roof	
L1-NR-26	257+360	Iron post with jasta shop	
L1-NR-27	257+380	Iron post with jasta shop	
L1-NR-28	257+385	Iron post with jasta shop	
L1-NR-29	257+390	Bamboo with jasta shop	
L1-NR-30	257+470	Bamboo and jasta Tahara	
L1-NR-31	258+300	Jasta Tea stall	
Not found structure from extended part temporary structure from original RAP			
L1-NR-32	243+150	Attached with RCC House, jasta roof	These PAH are not found during the latest verification due to inconsistencies in the earlier RAP information, including chainage and/or household information, and has therefore been retained in the reconciliation record for traceability.
L1-NR-33	258+200	Bamboo and jasta Tahara	
L1-NR-34	258+290	Attache with Mud Mortar House	
L1-NR-35	256+ 104	Mud and stone wall with hatch and zink roof	
L1-NR-36	257+020	Mud and stone wall with zink slab	
L1-NR-37	258+615	Attached with Mud mortar House	
Saved structure from private and extended part structure of original RAP			
L1-NR-38	248+760	Attached with RCC House, Jasta roof	All of these private extended part structures has been saved due to negligible impact, just touch RoW,
L1-NR-39	251+780	Temporary shoy from jasta and wood	
L1-NR-40	253+935	Mud house, Jasta roof	
L1-NR-41	255+030	Brick masonry ,Zink roof	
L1-NR-42	255+040	Brick masonry toilet	
	255+055	Jasta shed	

	255+085	Iron staircase	
L1-NR-43	256+460	Wall of shop	
L1-NR-44	257+180	Truss structure	
L1-NR-45	257+275	Jasta shop	
L1-NR-46	257+335	Only jasta roof Tahara	
L1-NR-47	257+400	Ladder and iron post with jasta shop	
L1-NR-48	257+430	Iron post with jasta shop	
L1-NR-49	257+460	Jasta with iron post shop	
L1-NR-50	257+480	Jasta with iron post shop	
L1-NR-51	257+525	Iron post with jasta Shop	
L1-NR-52	257+855	Brick wall Shop	
L1-NR-53	257+860	Jasta Tea stall	
L1-NR-54	259+790	Bamboo Shop, zink roof	
L1-NR-55	259+885	Brick wall with jasta roof	

Annex 5.2: Annex for non-retained PAH Lot- 2

Unique ID	**Chainage**	**Type of Structures**	**Remarks**
Removed extended part temporary structures from original RAP			
L2-NR-1	262+345	Attached with Brick wall, zink sheet roof	The extended part temporary structures used for business is removed by them selves
L2-NR-2	262+620	Brick wall with jasta sheet roof	
L2-NR-3	262+740	Bamboo Workshop, zink roof	
L2-NR-4	262+980	Attached with Mud mortar House, zink roof	

L2-NR-5	263+375	Bamboo Shop, zink roof	
L2-NR-6	263+400	Wooden Shop, zink roof	
L2-NR-7	263+600	Attached with RCC Shop, zink roof	
L2-NR-8	264+315	Bamboo Shop	
L2-NR-9	271+340	Workshop roof with zink sheet	
L2-NR-10	271+360	Business Hub	
L2-NR-11	271+335	Business Hub	
Not found extended part temporary structures from original RAP			
L2-NR-12	261+410	Zink sheet roof	These PAH are not found during the latest verification due to inconsistencies in the earlier RAP information, including chainage and/or household information, and has therefore been retained in the reconciliation record for traceability.
L2-NR-13	262+945	Brick wall Hotel	
L2-NR-14	263+355	Jasta roof	
L2-NR-15	264+385	Brick masonry Wall with zink roof	
L2-NR-16	266+885	Bamboo Shop, roof with zink sheet	
L2-NR-17	283+195	Bamboo Shop, roof with zink sheet	
Saved extended part temporary structures of original RAP			
L2-NR-18	260+965	Attached with brick wall tin roof	All these extended part structures has negligible impact, just touch RoW
L2-NR-19	261+225	Bamboo Pillar with zink roof	
L2-NR-20	261+255	Attached with Mud mortar House	
L2-NR-21	261+420	Attache with RCC House, zink roof	
L2-NR-22	264+400	Brick masonry wall and jasta covering	
Identified as public structure from extended part temporary structure of original RAP			
L2-NR-23	264+730	Bamboo and jasta Shop	Identified as publicly used like waiting shed

Annex 5.3: Annex for non-retained PAH Lot- 3

Annex for non-retained Structures			
Unique ID	**Chainage**	**Structure Type**	**Remarks**
Dismantled from extended part temporary structure			
L3-NR-1	**302+160**	Lalbabu Chaudhari	Dismantled the structures shifted other places
Removed extended part temporary structure of original RAP			
L3-NR-2	289+955	Chapro	The extended part temporary structures is used for business is removed by themselves
L3-NR-3	289+980	Mud Mortar Tea shop with jasta covering	
L3-NR-4	290+000	Mud Mortar House with stone roofing	
L3-NR-5	290+015	Chaparo with zinl sheet roof	
L3-NR-6	290+025	Attached with Stone and Mud house with zink roof	
L3-NR-7	290+020	Mud mortar Hotel with jasta sheets	
L3-NR-8	290+055	Hotel's pali	
L3-NR-9	290+545	RCC House column	
L3-NR-10	290+570	Roof	
L3-NR-11	295+280	Attached with Mud mortar hotel with jasta roof	
L3-NR-12	301+275	Mud mortar Tea shop	
L3-NR-13	302+370	Attached with RCC Hotel, tea shop with zink roof	
L3-NR-14	303+000	Brick masonry Workshop extended with zink sheet	
L3-NR-15	303+160	Attached with RCC House , zink sheet	
L3-NR-16	303+265	Mud mortar Shop with bamboo and jasta roof	
L3-NR-17	305+920	Bamboo and jasta Chapro	
L3-NR-18	305+930	Wooden House with jasta roofing	

L3-NR-19	305+960	Iron omnika academy ko gate with Zink roof	
L3-NR-20	310+075	Attache with RCC Chapro	
L3-NR-21	312+360	Jasta Chapro	
L3-NR-22	312+410	Pali like structure with zink roofing	
L3-NR-23	312+510	Pasal ko pali zink roofing	
L3-NR-24	312+640	Grill Shop with zink roofing	
Not found extended part temporary structure of original RAP			These PAH were not found during the latest verification due to inconsistencies in the earlier RAP information, including chainage and/or household information, and has therefore been retained in the reconciliation record for traceability.
L3-NR-25	291+405	Goth with zink roof	
L3-NR-26	302+820	Cottage with zink sheet	
L3-NR-27	303+925	Wooden House with zink roof	
L3-NR-28	303+460	Wooden shop, with zasta covering	
L3-NR-29	303+570	Taharo with zasta roof	
Save from extended part temporary structure of original RAP			
L3-NR-30	293+710	Taharo with zink roof	All these PAH of extended part temporary has negligible impact, just touch RoW
	293+715		
L3-NR-31	294+710	Hotel running in jasta covering roof	
L3-NR-32	299+895	Attached with RCC house/ zink roof	
L3-NR-33	300+755	Tanki with slab covering	
L3-NR-34	301+260	Iron Staircase	
L3-NR-35	301+280	Attached with Concrete House with jasta covering	
	301+280	Attache with Mud mortar House	
L3-NR-36	301+535	Attached with guest house .zink sheet	
L3-NR-37	303+425	Jasta covering	
L3-NR-38	303+430	Brick masonry wall and jasta covering	
L3-NR-39	312+385	Jasta Taharo	
L3-NR-40	312+400	Wooden House with	
L3-NR-41	312+405	Wooden House	
Identified as public structure from extended part temporary structure			

L3-NR-42	291+145	Stair and roof	Identified as publicly used and govt. structures
L3-NR-43	294+865	Hotel running (jasta covering)	
L3-NR-44	303+455	Jasta covering	